



Weaver

CONSTRUCTION MANAGEMENT

3679 S Huron Street, Suite 404 Englewood, Colorado 80110

Phone: (303) 789-4111 FAX: (303) 789-4310

SUBMITTAL TRANSMITTAL

July 31, 2012

WCM Submittal No: 16410-001

PROJECT: **Harold Thompson Regional WRF**
Birdsall Rd.
Fountain, CO 80817
Job No. 2908

ENGINEER: **GMS, Inc.**
611 No. Weber St., #300
Colorado Springs, CO 80903
719-475-2935 Roger Sams

OWNER: **Lower Fountain Metropolitan
Sewage Disposal District**
901 S. Santa Fe Ave.
Fountain, CO 80817
719-382-5303 James Heckman

CONTRACTOR: **MWI, Inc.**
7222 Commerce Center Dr. #245
Colorado Springs, CO 80919
Pat Danenberg

SUBJECT: Electrical Submittal for Pumping & Disinfection Building - Enclosed Switched, Switch Boards, Panel Boards, LVT

SPEC SECTIONS: 16410 Enclosed Switched, 16441 Switch Boards, 16442 Panel Boards, 16461 LVT

PREVIOUS SUBMISSION DATES: NA

DEVIATIONS FROM SPEC: ___ YES X NO

CONTRACTOR'S STAMP: This submittal has been reviewed by Weaver Construction Management and, unless indicated otherwise, has been found to be in conformance with the intent of the contract documents.

Contractor's Stamp:

Engineer's Stamp:

Date: 7/31/12

Reviewed by: John Jacob

(X) Reviewed Without Comments

() Reviewed With Comments

ENGINEER'S

COMMENTS:

McDade-Woodcock, Inc.

TRANSMITTAL

No. 00035

7222 Commerce Center Dr. Suite 245
Colorado Springs, CO 80919

Phone: 719-264-1236
Fax: 719-264-1450

PROJECT: Harold D. Thompson WRF

DATE: 7/27/2012

TO: Weaver General Construction

REF: Electrical Submittal
16410-002, 16441-002,
16442-002, 16461-002
Electrical Equip - Pumping &
Disinfection Bldg


ATTN: Wes Weaver

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
<input checked="" type="checkbox"/> Shop Drawings	<input checked="" type="checkbox"/> Approval	<input type="checkbox"/> Approved as Submitted
<input type="checkbox"/> Letter	<input type="checkbox"/> Your Use	<input type="checkbox"/> Approved as Noted
<input type="checkbox"/> Prints	<input type="checkbox"/> As Requested	<input type="checkbox"/> Returned After Loan
<input type="checkbox"/> Change Order	<input checked="" type="checkbox"/> Review and Comment	<input type="checkbox"/> Resubmit
<input type="checkbox"/> Plans		<input checked="" type="checkbox"/> Submit
<input type="checkbox"/> Samples	SENT VIA:	<input type="checkbox"/> Returned
<input type="checkbox"/> Specifications	<input checked="" type="checkbox"/> Attached	<input type="checkbox"/> Returned for Corrections
<input type="checkbox"/> Other:	<input type="checkbox"/> Separate Cover Via	<input checked="" type="checkbox"/> Due Date: 8/13/2012

ITEM	PACKAGE	SUBMITTAL	DRAWING	REV.	ITEM NO.	COPIES	DATE	DESCRIPTION	STATUS
					001	1	7/27/2012	Electrical Submittal 16410-002 - Enclosed Switches 16441-002 - Switch Boards 16442-002 - Panel Boards 16461-002 - Low Voltage (Dry Type) Transformers ELECTRICAL EQUIPMENT - PUMPING & DISINFECTION BLDG.	OUT

Remarks: Electrical Submittal for Review and Approval
Via Email Only

CC:

Signed: 
Janelle L. Smith



McDADE-WOODCOCK, INC.

HAROLD D. THOMPSON RWRF
PUMPING & DISINFECTION
BUILDING

McDADE-WOODCOCK INC.
PROJECT NUMBER - 1402

ELECTRICAL SUBMITTAL

ELECTRICAL EQUIPMENT

16410-002 (Enclosed Switches)

16441-002 (Switch Boards)

16442-002 (Panel Boards)

16461-002 (Low Voltage Transformers)

CORPORATE

2404 Claremont Ave. NE
Albuquerque, NM 87107

Mailing Address
P.O. Box 11592
Albuquerque, NM 87192

Ph 505-884-0155
Fax 505-884-6073

DENVER

10700 E. Geddes Avenue
Suite 170
Englewood CO 80112

Ph 303-803-1809
Fax 303-803-1818

COLORADO SPRINGS

7222 Commerce Center Drive
Suite 245
Colorado Springs, CO 80919

Mailing Address
P.O. Box 7349
Colorado Springs, CO 80933

Ph 719-264-1236
Fax 719-264-1450

Owner:

**Lower Fountain Metropolitan
Sewage District
901 S. Santa Fe Avenue
Fountain, CO 80817**

General Contractor:

**Weaver General Construction Co.
3679 S. Huron St. – Suite 404
Englewood, CO 80110**

Electrical Contractor:

**McDade-Woodcock, Inc.
7222 Commerce Center Dr.
#245
Colorado Springs, CO 80919**

Engineer:

**GMS Inc.
611 N. Weber St., Suite 300
Colorado Springs, CO 80903**



McDADE-WOODCOCK, INC.

HAROLD D. THOMPSON RWRF
PUMPING & DISINFECTION
BUILDING

McDADE-WOODCOCK INC.
PROJECT NUMBER - 1402

ELECTRICAL SUBMITTAL

ELECTRICAL EQUIPMENT

16410-002 (Enclosed Switches)

16441-002 (Switch Boards)

16442-002 (Panelboards)

16461-002 (LV Dry-Type Transformers)

CORPORATE

2404 Claremont Ave. NE
Albuquerque, NM 87107

Mailing Address
P.O. Box 11592
Albuquerque, NM 87192

Ph 505-884-0155
Fax 505-884-6073

DENVER

10700 E. Geddes Avenue
Suite 170
Englewood CO 80112

Ph 303-803-1809
Fax 303-803-1818

COLORADO SPRINGS

7222 Commerce Center Drive
Suite 245
Colorado Springs, CO 80919

Mailing Address
P.O. Box 7349
Colorado Springs, CO 80933

Ph 719-264-1236
Fax 719-264-1450

TABLE OF CONTENTS

**TAB 1: TECHNICAL DATA for
Panelboards**

**TAB 2: TECHNICAL DATA for
LV Dry-Type Transformers**

**TAB 3: TECHNICAL DATA for
Enclosed Circuit Breakers**

**TAB 4: TECHNICAL DATA for
Safety Switches**



McDADE-WOODCOCK, INC.

HAROLD D. THOMPSON RWRF
PUMPING & DISINFECTION
BUILDING

McDADE-WOODCOCK INC.
PROJECT NUMBER - 1413

ELECTRICAL SUBMITTAL
ELECTRICAL EQUIPMENT

16410-002 (Enclosed Switches)
16441-002 (Switch Boards)
16442-002 (Panel Boards)
16461-002 (Low Voltage Transformers)

CORPORATE

2404 Claremont Ave. NE
Albuquerque, NM 87107

Mailing Address
P.O. Box 11592
Albuquerque, NM 87192

Ph 505-884-0155
Fax 505-884-6073

DENVER

10700 E. Geddes Avenue
Suite 170
Englewood CO 80112

Ph 303-803-1809
Fax 303-803-1818

COLORADO SPRINGS

7222 Commerce Center Drive
Suite 245
Colorado Springs, CO 80919

Mailing Address
P.O. Box 7349
Colorado Springs, CO 80933

Ph 719-264-1236
Fax 719-264-1450

*** * * APPROVAL PAGE * * ***

**This submittal has been reviewed,
checked and approved for
compliance by:**

McDADE-WOODCOCK INC. – (PD)

This Date: 7/27/2012



HAROLD THOMPSON PUMP & DISINFECT

Submittal for Approval

General Order
SDN0330389
Volume 1 of 1

Equipment:

Panelboards
Dry Type Transformers
Enclosed Circuit Breakers
Safety Switches

REXEL COLORADO SPRINGS CO PO# PCSP3215175
MCDADE WOODCOCK INC/MWI COLORADO
© 2008 Eaton Corporation, All Rights Reserved

Date: 05/21/2012



HAROLD THOMPSON PUMP & DISINFECT

GO # SDN0330389

Submittals

Table of Contents

VOLUME	TAB	DESCRIPTION
1		Contact Sheet
1		Project Comments
1	1	Panelboards Detailed Bill of Material Submittal Shop Drawings Technical Data
1	2	Dry Type Transformers Detailed Bill of Material Submittal Shop Drawings Technical Data
1	3	Enclosed Circuit Breakers Detailed Bill of Material Technical Data
1	4	Safety Switches Detailed Bill of Material Submittal Shop Drawings Technical Data



Contact Information

For new project opportunities, contact:

Sales Person

MICHAEL FITZGERALD
8022 SOUTHPARK CIRCLE SUITE 30
LITTLETON, CO 80120
Phone: 303-738-2323
Fax: 303-738-2322
MICHAELFFITZGERALD@eaton.com

For logistical support, contact:

Project Coordinator

Lauren Calloway
175 VISTA BOULEVARD
ARDEN, NC, 28704
Phone: 828-651-0821
Fax: 828-651-0531
LaurenCalloway@eaton.com

For technical support, contact:

Project Engineer

Marin Huscher
175 VISTA BOULEVARD
ARDEN, NC, 28704
Phone: 828-651-0761
Fax: 800-647-9112
MarinRHuscher@eaton.com



PROJECT COMMENTS

Approved

Release all for manufacture.
No re-submittal required.

Approved as Noted

Release all for manufacture.
Make necessary changes
Show changes on const. drawings.

Partial Approval Revise and Re-submit

Release approved sections
for manufacture. Re-submit.
Rejected sections

Rejected

No release
Re-submit all.

The following information is pertinent with the return of this submittal. Cutler Hammer requires all information to be initialed and a final signature of responsible party.

- Lug Sizes for all equipment have been verified
- Top or Bottom Entry for all equipment has been verified
- Shipping splits have been verified
- Nameplate information has been verified for all equipment
- Orientation of breakers has been verified for all equipment

Stamp or Signature

Customer Comments:

No Comments (check here).....

General Order Number: SDN0330389



TAB 1 Panelboards

Customer Bill of Material

1 30 month EXT WTY panelboards

Catalog Number:

30 month EXT WTY for panelboards

Designations:

1 Pow-R-Line1a

18 Circuits, 100A, Fully Rated, 208Y/120V 3Ph 4W, Copper Bus, 10k AIC,40A, 3P BAB-H Main Breaker[Top Fed],
Surface Mounted

1 40A, 3P BAB-H Main Breaker

1 30A, 3P BAB-H Branch Breaker

3 1P BAB Branch Provision Only

9 20A, 1P BAB Branch Breaker

1 20A, 3P BAB-H Branch Breaker

1 Copper Main Bus, 100 Amps

1 Std. Bolted Cu Ground Bar (Cu Cable Only)

1 Panel Nameplate - White with Black Letters - Screw on

1 Circuit Directory - Metal Frame with Plastic Cover

1 Type 1 Enclosure:EZB2036R

1 EZ Trim, Door in Door, Concealed Hardware:EZT2036S

Designations: SC-L1

1 Pow-R-Line1a

42 Circuits, 100A, Fully Rated, 208Y/120V 3Ph 4W, Copper Bus, 10k AIC,100A, 3P BAB-H Main Breaker[Top Fed],
Surface Mounted

1 100A, 3P BAB-H Main Breaker

30 20A, 1P BAB Branch Breaker

10 1P BAB Branch Provision Only

1 15A, 2P BAB Branch Breaker

1 Copper Main Bus, 100 Amps

1 Std. Bolted Cu Ground Bar (Cu Cable Only)

1 Panel Nameplate - White with Black Letters - Screw on

1 Circuit Directory - Metal Frame with Plastic Cover

1 Type 1 Enclosure:EZB2042R

1 EZ Trim, Door in Door, Concealed Hardware:EZT2042S


Designations: PD-L1

Customer Bill of Material

- 1 Pow-R-Line3a
42 Circuits, 100A, Fully Rated, 480V 3Ph 3W, Copper Bus, 35k AIC,100A, Main Lugs Only[Top Fed], Surface Mounted
 - 1 100A, Main Lugs Only
 - 1 20A, 3P FD Branch Breaker
 - 5 3P FD Branch Provision Only
 - 1 50A, 3P FD Branch Breaker
 - 1 30A, 3P FD Branch Breaker
 - 6 15A, 3P FD Branch Breaker
 - 1 Copper Main Bus, 100 Amps
 - 1 Std. Bolted Cu Ground Bar (Cu Cable Only)
 - 1 Panel Nameplate - White with Black Letters - Screw on
 - 1 Circuit Directory - Metal Frame with Plastic Cover
 - 1 Type 1 Enclosure:EZB2048R
 - 1 EZ Trim, Door in Door, Concealed Hardware:EZT2048SDesignations: PD-H1

- 1 Pow-R-Line3a
29 Circuits, 100A, Fully Rated, 480V 3Ph 3W, Copper Bus, 35k AIC,100A, Main Lugs Only[Top Fed], Surface Mounted
 - 1 100A, Main Lugs Only
 - 1 20A, 3P FD Branch Breaker
 - 1 20A, 2P FD Branch Breaker
 - 4 3P FD Branch Provision Only
 - 2 30A, 3P FD Branch Breaker
 - 2 15A, 3P FD Branch Breaker
 - 1 Copper Main Bus, 100 Amps
 - 1 Std. Bolted Cu Ground Bar (Cu Cable Only)
 - 1 Panel Nameplate - White with Black Letters - Screw on
 - 1 Circuit Directory - Metal Frame with Plastic Cover
 - 1 Type 1 Enclosure:EZB2048R
 - 1 EZ Trim, Door in Door, Concealed Hardware:EZT2048SDesignations: SC-H1

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.

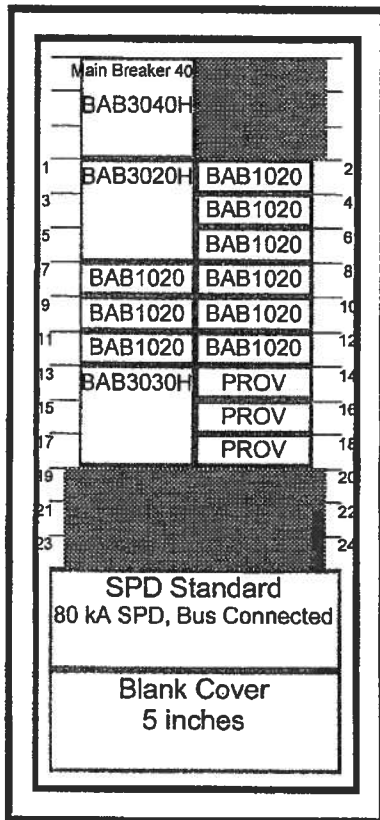

General Information

(Section 1 of 1)

Service Voltage: 208Y/120V 3Ph 4W Enclosure: Type 1
 Bus Rating & Type: 100A Copper Neutral Rating: 100A
 Ground Bar: Std. Bolted Copper, Cu cable only
 S.C. Rating: 10k A.I.C. Fully Rated

Main Device Type: Main Breaker - Top Cable Entry
 Main Terminals: Mechanical - (1) #14-#4 (Cu/Al)
 Neutral Terminals: Mechanical - (1) #14-1/0 (Cu/Al)
 Box Catalog No.: EZB2042R
 Trim: EZ Trim, Door in Door, Concealed Hardware (EZT2042S)

Surface Mounted

Box Dimensions: 42." [1066.8mm]H x 20" [508.0mm]W x 5.75" [146.0mm]D
 Min. Gutter Size: Top = 5.5" [139.7mm] Bottom = 5.5" [139.7mm]
 Left = 6.0" [152.4mm] Right = 6.0" [152.4mm]

Panel ID Nameplate: (1) SC-L1
 Type: Plastic, screw-on (2) 208Y/120V 3Ph 4W
 Color: White with Black Letters (3)

NEC Lighting & Appliance, UL CTL ***Non-interchangeable Main Device***

Copper Neutral
 Trim Lock: Standard Lock & Key (Keyed WEM2)
 Circuit Directory: Metal Frame with Plastic Cover
 Main Circuit Breaker Trip Type: Thermal-Magnetic.
 Do not connect breakers with combined ampere ratings that exceed 140 amperes on any individual branch bus connector.

Device Modifications:

Ref #	Description

Branch Devices

Qty	Poles	Trip	Frame	Amps	KAIC
1	3	20	BAB	100	10
1	3	30	BAB	100	10
9	1	20	BAB	100	10
3	1		PROV		

Notes:

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY: Fitzgerald, Michael F
 DATE: 07/25/12

APPROVED BY: _____
 DATE: 07/25/12

VERSION: 7.9

REVISION: _____
 DWG SIZE: A

Eaton Corporation


JOB NAME: HAROLD THOMPSON PUMP & DISINFECT

DESIGNATION: SC-L1

TYPE: PRL1a
 DRAWING TYPE: Customer Approval

NEG-ALT NUMBER: D8400208D201-R001

G.O.: SDN0330389
 ITEM: 0101
 SHEET: 1 OF 1

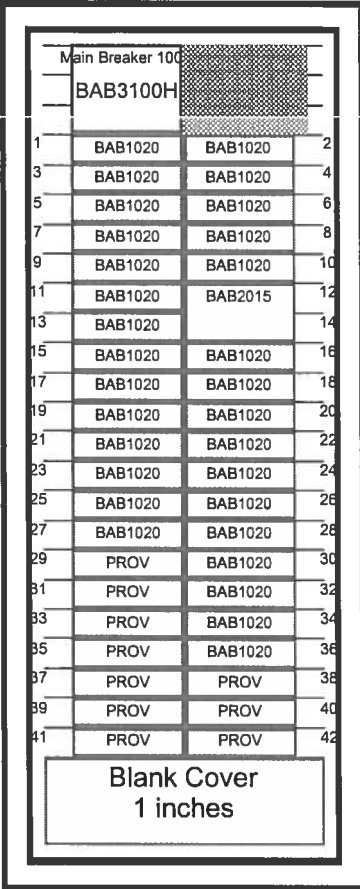

General Information

(Section 1 of 1)

Service Voltage: 208Y/120V 3Ph 4W
Bus Rating & Type: 100A Copper
Ground Bar: Std. Bolted Copper, Cu cable only
S.C. Rating: 10k A.I.C. Fully Rated
Enclosure: Type 1
Neutral Rating: 100A
Main Device Type: Main Breaker - Top Cable Entry
Main Terminals: Mechanical - (1) #8-1/0 (Cu/Al)
Neutral Terminals: Mechanical - (1) #14-1/0 (Cu/Al)
Box Catalog No.: EZB2042R
Trim: EZ Trim, Door in Door, Concealed Hardware (EZT2042S)

Surface Mounted

Box Dimensions: 42." [1066.8mm]H x 20" [508.0mm]W x 5.75" [146.0mm]D
Min. Gutter Size: Top = 5.5" [139.7mm] Bottom = 5.5" [139.7mm]
 Left = 6.0" [152.4mm] Right = 6.0" [152.4mm]

Panel ID Nameplate: (1) PD-L1
Type: Plastic, screw-on (2) 208Y/120V 3Ph 4W
Color: White with Black Letters (3)

NEC Lighting & Appliance, UL CTL ***Non-Interchangeable Main Device***

Copper Neutral
Trim Lock: Standard Lock & Key (Keyed WEM2)
Circuit Directory: Metal Frame with Plastic Cover
Main Circuit Breaker Trip Type: Thermal-Magnetic
 Do not connect breakers with combined ampere ratings that exceed 140 amperes on any individual branch bus connector.

Device Modifications:

Ref # Description

Branch Devices

Qty	Poles	Trip	Frame	Amps	KAIC
1	2	15	BAB	100	10
3	1	20	BAB	100	10
10	1		PROV		

Notes:

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY Fitzgerald, Michael F	DATE 05/14/12	Eaton Corporation			
APPROVED BY	DATE 05/14/12	JOB NAME HAROLD THOMPSON PUMP & DISINFECT			
		DESIGNATION PD-L1			
VERSION 7.8		TYPE PRL1a	DRAWING TYPE Customer Approval		
NEG-ALT NUMBER D8400208D201-C000	REVISION	DWG SIZE A	G.O. SDN0330389	ITEM 0111	SHEET 1 OF 1

**Main Lugs Only
100A**

1	FD3015	FD3030	2
3	15A	30A	4
5			6
7	FD3015	FD3020	8
9	15A	20A	10
11			12
13	FD3015	PROVFD3	14
15	15A	50A	16
17			18
19	FD3015	PROVFD3	20
21	15A	50A	22
23			24
25	FD3015	PROVFD3	26
27	15A	50A	28
29			30
31	FD3015	PROVFD3	32
33	15A	50A	34
35			36
37	FD3050	PROVFD3	38
39	50A	50A	40
41			42

General Information

(Section 1 of 1)

Service Voltage: 480V 3Ph 3W **Enclosure:** Type 1
Bus Rating & Type: 100A Copper **Neutral Rating:** None
Ground Bar: Std. Bolted Copper, Cu cable only
S.C. Rating: 35k A.I.C. Fully Rated

Main Device Type: Main Lugs Only - Top Cable Entry
Main Terminals: Mechanical - (1) #14-1/0 (Cu/Al)
Neutral Terminals: None
Box Catalog No.: EZB2048R
Trim: EZ Trim, Door in Door, Concealed Hardware (EZT2048S)

 Surface Mounted

Box Dimensions: 48." [1219.2mm]H x 20" [508.0mm]W x 5.75" [146.0mm]D
Min. Gutter Size: Top = 5.5" [139.7mm] Bottom = 5.5" [139.7mm]
 Left = 4" [101.6mm] Right = 4" [101.6mm]

Panel ID Nameplate: (1) PD-H1
Type: Plastic, screw-on (2) 480V 3Ph 3W
Color: White with Black Letters (3)

UL

Trim Lock: Standard Lock & Key (Keyed WEM2)
 Circuit Directory: Metal Frame with Plastic Cover

Device Modifications:

Ref # Description

Branch Devices

Qty	Poles	Trip	Frame	Amps	KAIC
6	3	15	FD	100	35
1	3	20	FD	100	35
1	3	30	FD	100	35
1	3	50	FD	100	35
5	3		PROVFD3		

Notes:

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY DATE
 Fitzgerald, Michael F 05/14/12

Eaton Corporation

APPROVED BY DATE
 _____ 05/14/12

JOB NAME HAROLD THOMPSON PUMP & DISINFECT
 DESIGNATION PD-H1

VERSION
 7.8


TYPE DRAWING TYPE
 PRL3a Customer Approval

NEG-ALT NUMBER
 D8400208D201-C000

REVISION DWG SIZE
 _____ A

G.O. SHEET
 SDN0330389 1 OF 1

ITEM
 0121

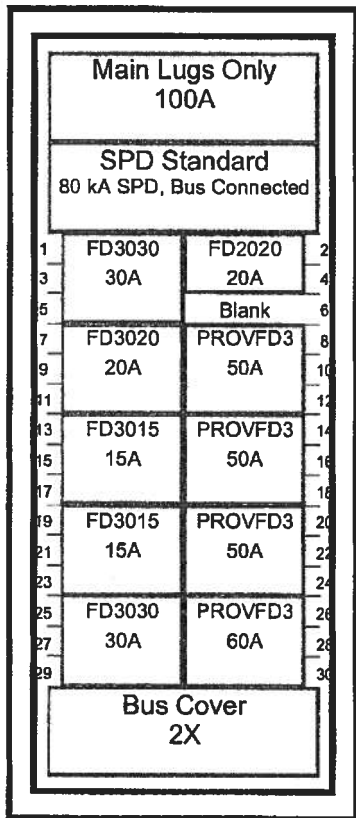

General Information

(Section 1 of 1)

Service Voltage: 480V 3Ph 3W Enclosure: Type 1
 Bus Rating & Type: 100A Copper Neutral Rating: None
 Ground Bar: Std. Bolted Copper, Cu cable only
 S.C. Rating: 35k A.I.C. Fully Rated

Main Device Type: Main Lugs Only - Top Cable Entry
 Main Terminals: Mechanical - (1) #14-1/0 (Cu/Al)
 Neutral Terminals: None
 Box Catalog No.: EZB2048R
 Trim: EZ Trim, Door in Door, Concealed Hardware (EZT2048S)

Surface Mounted

Box Dimensions: 48." [1219.2mm]H x 20" [508.0mm]W x 5.75" [146.0mm]D
 Min. Gutter Size: Top = 5.5" [139.7mm] Bottom = 5.5" [139.7mm]
 Left = 4" [101.6mm] Right = 4" [101.6mm]

Panel ID Nameplate: (1) SC-H1
 Type: Plastic, screw-on (2) 480V 3Ph 3W
 Color: White with Black Letters (3)

UL

Trim Lock: Standard Lock & Key (Keyed WEM2)
 Circuit Directory: Metal Frame with Plastic Cover

Device Modifications:

Ref # Description

Branch Devices

Qty	Poles	Trip	Frame	Amps	KAIC
2	3	15	FD	100	35
1	3	20	FD	100	35
2	3	30	FD	100	35
1	2	20	FD	100	35
4	3		PROVFD3		


Notes:

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

NEG-A.T NUMBER
DB400208D201-R001

PREPARED BY Fitzgerald, Michael F	DATE 07/25/12	Eaton Corporation	
APPROVED BY	DATE 07/25/12	JOB NAME HAROLD THOMPSON PUMP & DISINFECT	DESIGNATION SC-H1
VERSION 7.9	DWG SIZE A	TYPE PRL3a	DRAWING TYPE Customer Approval
REVISION	DWG SIZE	G.O. SDN0330389	ITEM 0131
			SHEET 1 OF 1

Eaton's SPD Series for integration into electrical distribution equipment

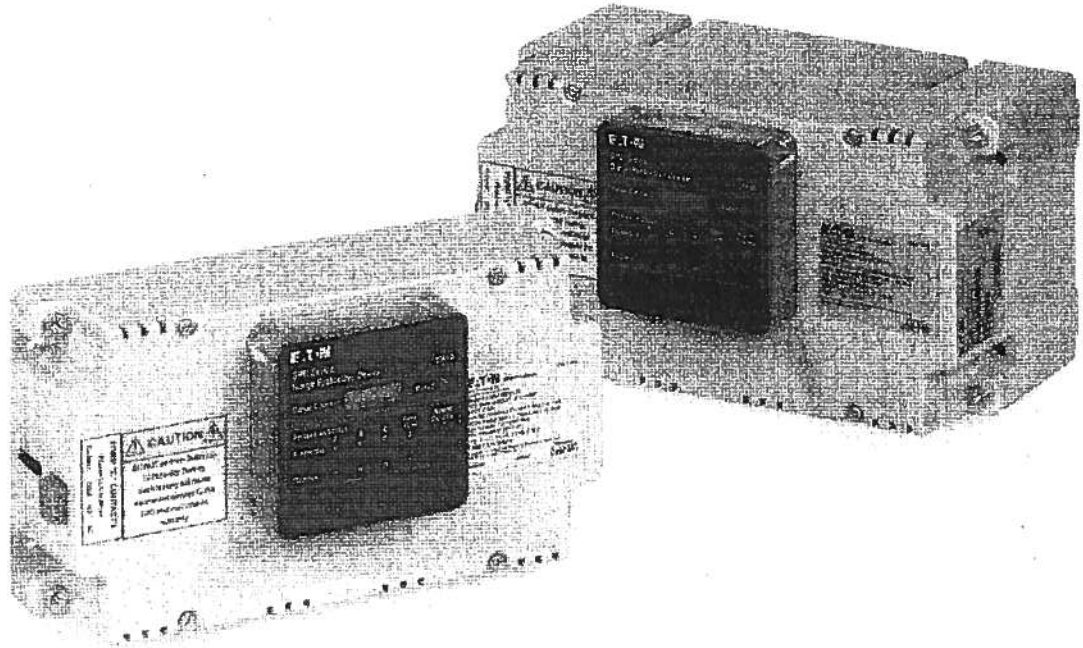

Contents

Description	Page
Introduction	2
Applications	2
Features	2
Standards and certifications	2
Feature package options	3
Remote display mounting option	3
Dimensions	3
Performance data	5
Specifications	6
Catalog number selection	7
Technical support information	7

EATON

Powering Business Worldwide

Introduction

Eaton's SPD Series surge protective devices

Eaton's SPD Series surge protective devices are the latest and most advanced UL® 1449 3rd Edition certified surge protectors. Units are available integrated within Eaton electrical assemblies, including panelboards, switchboards, motor control centers, switchgear, and bus plugs. Side-mount versions of the SPD Series are also available for installation external to an electrical assembly. Application of SPD Series units throughout a facility will ensure that equipment is protected with the safest and most reliable surge protective devices available.

SPD Series units are available in all common voltages and configurations and also in a variety of surge current capacity ratings from 50 through 400 kA. Three feature package options are also available to choose from. The breadth of the SPD Series' features, options, and configurations ensures that the correct unit is available for all electrical applications, including service entrances, distribution switchboards, panelboards, and point-of-use applications.

Applications

The SPD Series is available as an integrated device within the following Eaton electrical assemblies:

- Panelboards
- Switchboards
- Motor control centers
- Switchgear
- Automatic transfer switches
- Bus plugs


Features

- Uses thermally protected metal oxide varistor (MOV) technology
- 20 kA nominal discharge current (I_n) rating (maximum rating assigned by UL)
- 50 through 400 kA surge current capacity ratings
- Three feature package options
- 200 kA short circuit current rating (SCCR)
- 10-year warranty

Standards and certifications



- UL 1449 3rd Edition recognized component for the United States and Canada, covered by Underwriters Laboratories certification and follow-up service

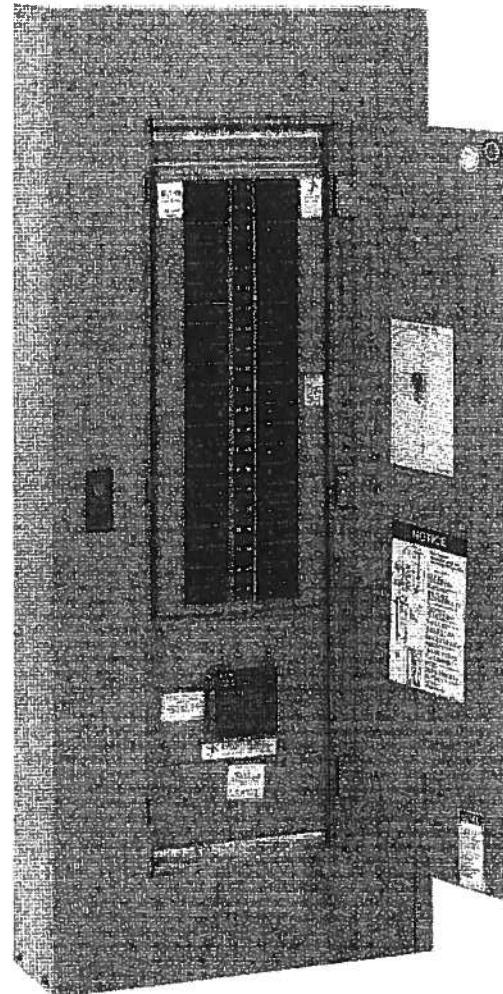

SPD Series Unit Integrated Within an Eaton Panelboard

Feature package options

The SPD Series provides users with the option of selecting between three feature packages. These feature packages are the basic, standard, and standard with surge counter. The proper feature package can be selected based on the requirements of the application or specification.

Table 1. Feature Package Comparison

Feature	Basic	Standard	Standard with Surge Counter
Surge protection using thermally protected MOV technology	✓	✓	✓
Dual-colored protection status indicators for each phase	✓	✓	✓
Dual-colored protection status indicators for the neutral-ground protection mode	✓	✓	✓
Audible alarm with silence button		✓	✓
Form C relay contact		✓	✓
EMI/RFI filtering, providing up to 50 dB of noise attenuation from 10 kHz to 100 MHz		✓	✓
Surge counter with reset button			✓

Remote display mounting option

The SPD Series offers the option of mounting its display remotely from the device. This is useful for applications where OEMs or other integrators would like to embed the unit within a piece of equipment and still be able to view its display.

SPD Series unit catalog numbers ending with 'B' (refer to catalog number configuration on **Page 7**) should be ordered for applications where the display is to be mounted remotely. These units include the SPD Series unit and the remote display panel.

In addition to the unit itself, a remote display cable will have to be purchased. Remote display cables are available in 4, 8, and 12 foot lengths.

Table 2. Remote Display Cables

Description	Catalog Number
4 ft remote display cable	SPDRDCAB04
8 ft remote display cable	SPDRDCAB08
12 ft remote display cable	SPDRDCAB12

Note: Integrated units factory-installed with Eaton switchgear assemblies do not require the purchase of a remote display cable. The cable is provided and all required mounting is performed at the factory.

Existing SPD Series units previously installed without a remote display also have the capability of mounting their displays remotely from the device. Complete remote display kits are available that contain all items required to mount the display remotely, including the remote display cable. Remote display kits are available in 4, 8, and 12 foot cable length options.

Table 3. Remote Display Kits

Description	Catalog Number
Remote display kit with 4 ft remote display cable	SPDRDKIT04
Remote display kit with 8 ft remote display cable	SPDRDKIT08
Remote display kit with 12 ft remote display cable	SPDRDKIT12

For the dimensions of the cutout required to accommodate the remote display panel, see **Figure 1** below.

Dimensions

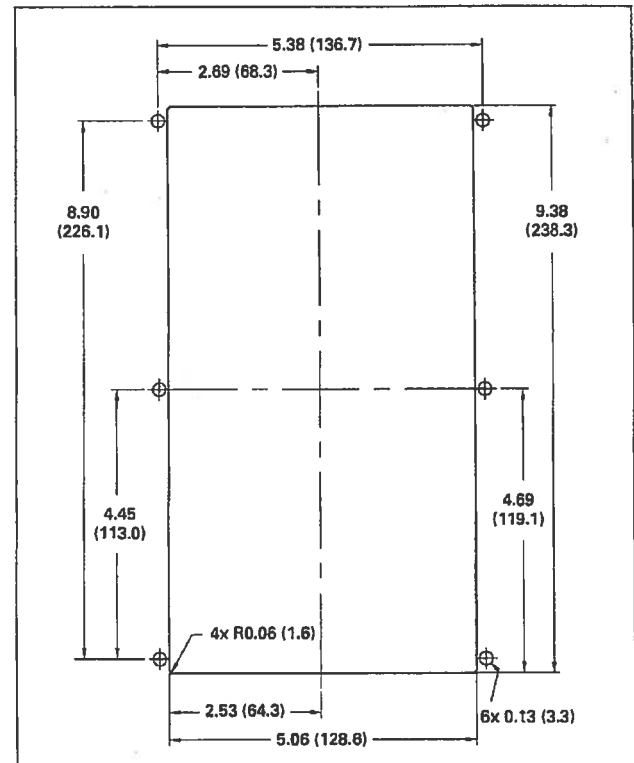


Figure 1. Dimensions of the Cutout Required to Accommodate the Optional Remote Display Panel

Dimensions (continued)

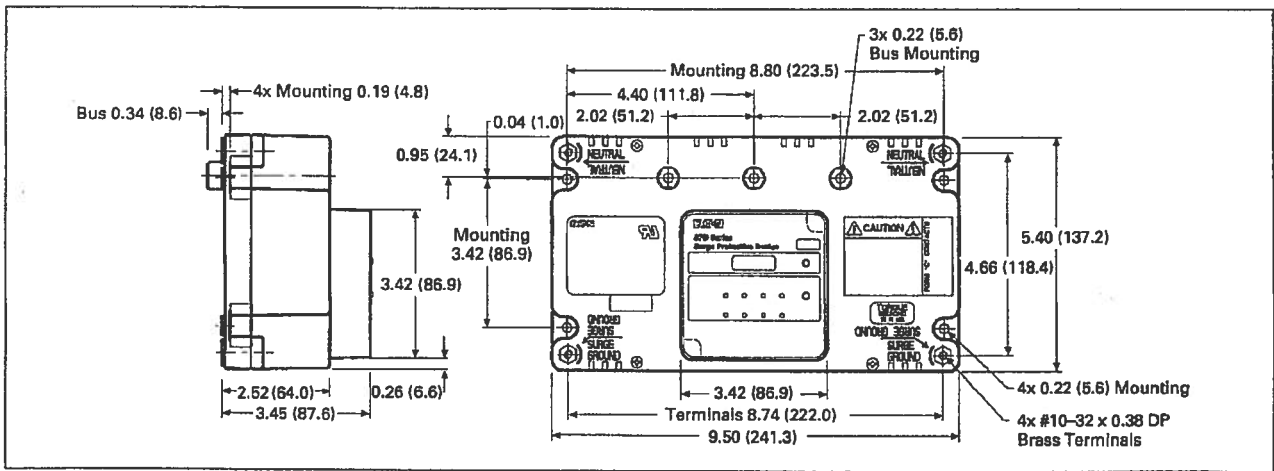


Figure 2. Dimensions of 50 through 200 kA Integrated Units

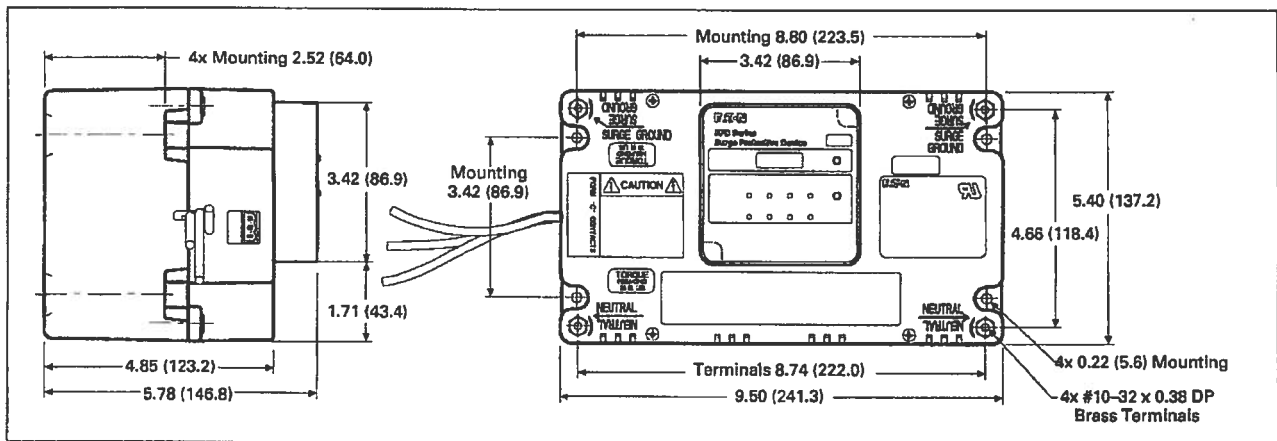


Figure 3. Dimensions of 250 through 400 kA Integrated Units

Performance data

ANSI/UL 1449 3rd Edition voltage protection ratings

Voltage protection rating (VPR) data is included for both direct bus mounted units (catalog number ending with 'A') and units interfaced to the electrical assembly via a circuit breaker (catalog number ending with 'B,' 'C,' or 'J'). Direct bus mounted units are available for installation within Eaton PRL1a, 2a, 3a, and 3E panelboards only.

Table 4. 50 kA Direct Bus Mounted Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	500	1000	500	1000
208Y and 220Y	500	1000	500	1000
400Y and 480Y	1000	2000	1000	2000
600Y	1200	2500	1200	2500
240D	N/A	1000	N/A	900
480D	N/A	2000	N/A	2000
600D	N/A	2500	N/A	2500
240H	500	1000	500	1000

Table 8. 50 kA Circuit Breaker Interfaced Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	700	1200	700	1200
208Y and 220Y	700	1200	700	1200
400Y and 480Y	1200	2000	1200	2000
600Y	1500	2500	1500	2500
240D	N/A	1200	N/A	1200
480D	N/A	2000	N/A	2000
600D	N/A	2500	N/A	2500
240H	700	1200	700	1200

Table 5. 80-100 kA Direct Bus Mounted Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	500	600	500	900
208Y and 220Y	500	600	500	900
400Y and 480Y	1000	1200	1000	1800
600Y	1200	1500	1200	2500
240D	N/A	1000	N/A	900
480D	N/A	1800	N/A	1800
600D	N/A	2500	N/A	2500
240H	500	600	500	900

Table 9. 80-100 kA Circuit Breaker Interfaced Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	700	700	700	1000
208Y and 220Y	700	700	700	1000
400Y and 480Y	1200	1200	1200	1800
600Y	1500	1500	1500	2500
240D	N/A	1200	N/A	1200
480D	N/A	2000	N/A	2000
600D	N/A	2500	N/A	2500
240H	700	700	700	1000

Table 6. 120-200 kA Direct Bus Mounted Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	500	600	500	800
208Y and 220Y	500	600	500	800
400Y and 480Y	900	1000	900	1800
600Y	1200	1200	1200	2500
240D	N/A	900	N/A	900
480D	N/A	1800	N/A	1800
600D	N/A	2500	N/A	2500
240H	500	600	500	800

Table 10. 120-200 kA Circuit Breaker Interfaced Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	700	700	600	1000
208Y and 220Y	700	700	600	1000
400Y and 480Y	1000	1200	1000	1800
600Y	1500	1500	1200	2500
240D	N/A	1000	N/A	1000
480D	N/A	2000	N/A	1800
600D	N/A	2500	N/A	2500
240H	700	700	600	1000

Table 7. 250-300 kA Circuit Breaker Interfaced Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	600⊕	700	600	1000
208Y and 220Y	600⊕	700	600	1000
400Y and 480Y	1000	1200	900	1800
600Y	1500	1500	1200	2500
240D	N/A	1000	N/A	1000
480D	N/A	1800	N/A	1800
600D	N/A	2500	N/A	2500
240H	600⊕	700	600	1000

Table 11. 400 kA Circuit Breaker Interfaced Integrated Unit VPR

Voltage Code	Protection Mode			
	L-N	L-G	N-G	L-L
240S	700	700	600	1000
208Y and 220Y	700	700	600	1000
400Y and 480Y	1000	1200	900	1800
600Y	1500	1500	1200	2500
240D	N/A	1000	N/A	1000
480D	N/A	1800	N/A	1800
600D	N/A	2500	N/A	2500
240H	700	700	600	1000

⊕ L-N VPR for 250-300 kA units containing the standard and standard with surge counter feature packages is 600V. L-N VPR for units containing the basic feature package is 700V. All other VPR numbers reported in all tables represent the VPR for all feature packages.


Specifications

Table 12. SPD Series Specifications

Description	Specification
Surge capacity ratings available	50, 80, 100, 120, 160, 200, 250, 300, 400 kA per phase
Nominal discharge current (I _n)	20 kA
Short circuit current rating (SCCR)	200 kA
SPD type	Basic feature package = Type 1 (can also be used in Type 2 applications) Standard and Standard with Surge Counter feature packages = Type 2
Single split phase voltages available	120/240
Three-phase Wye system voltages available	120/208, 127/220, 230/400, 277/480, 347/600
Three-phase Delta system voltages available	240, 480, 600
Input power frequency	50/60 Hz
Power consumption (basic units): 208Y, 220Y, 240S, 240D, and 240H voltage codes 400Y, 480Y, and 480D voltage codes 600Y and 600D voltage codes	0.5W 1.1W 1.3W
Power consumption (standard and standard with surge counter units): 208Y, 220Y, 240S, 240D, and 240H voltage codes 400Y, 480Y, and 480D basic voltage codes 600Y and 600D voltage codes	0.6W 1.7W 2.1W
Protection modes	Single split phase L-N, L-G, N-G, L-L Three-phase Wye L-N, L-G, N-G, L-L Three-phase Delta L-G, L-L Three-phase high-leg Delta . . . L-N, L-G, N-G, L-L
Maximum continuous operating voltage (MCOV): 240S, 208Y, 220Y, and 240H MCOV 400Y and 480Y MCOV 600Y MCOV 240D MCOV 480D MCOV 600D MCOV	150 L-N, 150 L-G, 150 N-G, 300 L-L 320 L-N, 320 L-G, 320 N-G, 640 L-L 420 L-N, 420 L-G, 420 N-G, 840 L-L 320 L-G, 320 L-L 640 L-G, 640 L-L 840 L-G, 840 L-L
Ports	1
Operating temperature	-4°F through 122°F (-20°C through 50°C)
Operating humidity	5% through 95%, noncondensing
Operating altitude	Up to 18,000 ft (5000m)
Seismic withstand capability	Meets or exceeds the requirements specified in IBC® 2006, CBC 2007, and UBC® Zone 4
Weight	50-200 kA units approximately 3.5 lbs (1.6 kg) 250-400 kA units approximately 7.0 lbs (3.2 kg)
Form C relay contact ratings	150 Vdc or 125 Vac, 1A maximum
Form C relay contact logic	Power ON, normal state—NO contact = open, NC contact = closed Power OFF or fault state—NO contact = closed, NC contact = open
EMI/RFI filtering attenuation	Up to 50 dB from 10 kHz to 100 MHz
Agency certifications and approvals	UL 1449 3rd Edition recognized component for the U.S. and Canada UL 1283 (Type 2 SPDs only)
Warranty	10 years

Catalog number selection

Table 13. SPD Series Catalog Number Configuration for Units Integrated into Electrical Distribution Equipment

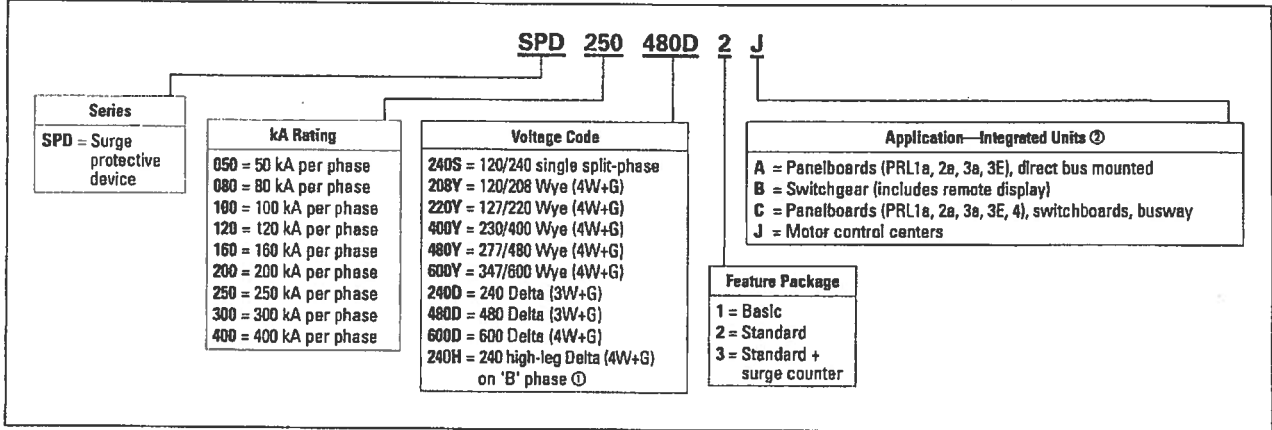

Example: SPD250480D2J = SPD Series, 250 kA per phase, 480D voltage, standard feature package, motor control center application

① Please consult the factory for 240 high-leg Delta (4W+G) applications with high leg on 'C' phase.

② Units used in PRL1a, 2a, 3a, and 3E panelboard applications are available in 50–200 kA ratings only. Use the 'C' option for PRL1a, 2a, 3a, and 3E panelboard applications when unit is connected through a circuit breaker.

Technical support information

If you have any questions or need additional information, please contact the Eaton Technical Resource Center at 800-809-2772, option 4, option 2. You may also submit inquiries via e-mail: surgeprotection@eaton.com.

Technical Data TD01005006E
Effective August 2009

Eaton's SPD Series for integration into
electrical distribution equipment

Eaton Corporation
Electrical Sector
1111 Superior Ave.
Cleveland, OH 44114
United States
877-ETN-CARE (877-386-2273)
Eaton.com

© 2009 Eaton Corporation
All Rights Reserved
Printed in USA
Publication No. TD01005006E / 28902
August 2009



PowerChain
Management

PowerChain Management is a registered
trademark of Eaton Corporation.

All other trademarks are property of their
respective owners.

EATON
Powering Business Worldwide



Technical Data

10.1 Panelboards and Lighting Control

Introduction


Panelboards and Lighting Controls

Contents

Description

Product Selection Guide

10

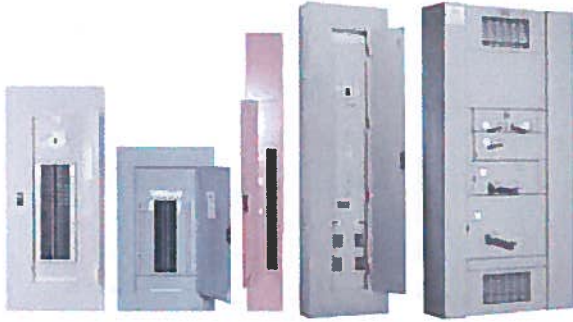

Product Selection Guide

Product Types



Type PRL1a	Fusible Lighting Panelboard PRL1aF	Type PRL1a-LX Column Type	Type PRL2a	Fusible Lighting Panelboard PRL2aF	Type PRL2a-LX, Column Type
Bolt-On or Plug-On Circuit Breakers 240 Vac Maximum	240 and 480Y/277 Vac Maximum	Bolt-On Circuit Breakers 240 Vac Maximum	Bolt-On Circuit Breakers 240 or 480Y/277 Vac; 125/250 Vdc Maximum	240 and 480Y/277 Vac Maximum	Bolt-On Circuit Breakers 240 or 480Y/277 Vac; 125/250 Vdc Maximum
Main lugs only 400A maximum	Main lugs only 400A maximum	Main lugs only 225A maximum	Main lugs only 400A maximum	Main lugs only 400A maximum	Main lugs only 225A maximum
Main Circuit breaker 400A maximum	Branch overcurrent protective devices 30A maximum, Single-, two and three-pole utilizing Class CC fuses	Main circuit breaker 225A maximum	Main circuit breaker 400A maximum	Branch overcurrent protective devices 30A maximum, Single-, two- and three-pole utilizing Class CC fuses	Main circuit breaker 225A maximum
Branch circuit breakers 100A maximum, Single-, two- and three-pole		Branch circuit breakers 100A maximum, Single-, two- and three-pole	Branch circuit breakers 100A maximum, Single-, two- and three-pole		Branch circuit breakers 100A maximum, Single-, two- and three-pole

Product Types, continued



**Retrofit Panelboard
PRL-1R and PRL-2R**

**Bolt-On Circuit Breakers
480Y/277 Vac;
240 Vac, 480Y/277 Vac**

Main lugs only
225A maximum

Main circuit breaker
225A maximum

Branch circuit breakers
100A maximum,
Single-, two and three-pole



Type PRL3a

**Bolt-On Circuit Breakers
240, 480 or 600 Vac;
250 Vdc Maximum**

Main lugs only
800A maximum

Main circuit breaker
600A maximum

Branch circuit breakers
225A maximum,
Single-, two- and three-pole



Type PRL3E

**Bolt-On Circuit Breakers
240, 480Y/277 or 480 Vac;
250 Vdc Maximum**

Main lugs only
600A maximum

Main circuit breaker
600A maximum

Branch circuit breakers
125A maximum,
Single-, two- and three-pole



Type PRL4

**Circuit Breakers or Fusible Switches
240, 480 or 600 Vac; 600 Vdc Maximum**

Main lugs only
1200A maximum

Main circuit breaker
1200A maximum

Main fusible switch
1200A maximum

Branch circuit breakers
1200A maximum,
Single-, two- and three-pole

Branch fusible switches
1200A maximum,
two- and three-pole



Type PRL5P

**Plug-On Circuit Breakers
240, 480 or 600 Vac;
250 Vdc Maximum**

Main lugs only
1200A maximum

Main circuit breaker
1200A maximum

Branch circuit breakers
1200A maximum,
Single-, two- and three-pole

Product Types, continued



Pow-R-Command

**Bolt-On Circuit Breakers
240 or 480Y/277 Vac**

Main lugs only
400A maximum

Main circuit breaker
400A maximum

Branch circuit breakers
225A maximum,
Single-, two- and three-pole

Integral power switching controls



Metering Service Section

**Bolt-On Circuit Breaker or Fusible
Switch 240, 480 or 600 Vac**

Service entrance panels combining a
main disconnect with a power
company metering compartment
400–1200A



Elevator Control Panelboard

**Bolt-On Fusible Switches
600 Vac Maximum**

Controls for up to four elevators
in a single Panelboard

Main lugs only
800A maximum

Branch overcurrent devices
15–200A fusible switches with
Class J fuse clips maximum

Designed to meet specific
sections of various codes
impacting elevators

Pow-R-Line C Panelboards



10

Product Description

Lighting and Distribution Panelboards

Eaton's assembled panelboards are designed for sequence phase connection of branch circuit devices. This allows complete flexibility of circuit arrangement (single-, two- or three-pole) to allow balance of the electrical load on each phase.

Sturdy, rigid chassis assembly ensures accurate alignment of interior with panel front; prevents flexing and minimizes possibility of loosening or damage to current carrying parts during and after installation.

Four-point in-and-out adjustment of panel interior is provided to meet critical depth dimensions on flush installations. This compensates for possible misalignment of box at installation.

Main lugs are mechanical solderless type and approved for copper or aluminum conductors.

Enclosures

Boxes are code-gauge galvanized steel, which include a painted box finished in ANSI-61 light gray to match the trim.

Standard panelboard cabinets are designed for indoor use. Alternate types are available for indoor and special purpose applications.

All enclosures are furnished in accordance with Underwriters Laboratories standards and include wiring gutters with proper wire bending space. Special cabinets can be provided at an additional charge.

The box dimensions shown are inside dimensions. For outside dimensions, add 1/4-inch (6.4 mm).

Standard panelboard boxes are supplied without knockouts (blank endwalls).

Fronts

Fronts (trims) for all panelboards are made of code-gauge steel and have a high durability ANSI-61 light gray finish applied by a baked-on polyester powder coating paint system.

The fronts for lighting and appliance branch circuit panelboards and small power distribution panelboards include a door with rounded corners and concealed hinges. A flush-type latch and lock assembly is included. All locks are keyed alike. These trims are available in both surface- and flush-mounted designs.



EZ Trim Features Standard Door-in-Door with No Exposed Hardware or Sharp Edges (no Tools are Required for Installation)



The Three-Piece Trim for Larger Power Distribution Panelboards Provides for Easy Handling and Installation

Fronts for power distribution panelboards utilize a unique breaker front cover design in which each device has a dedicated bolt-on steel cover. The individual covers form a single deadfront for the panelboard that is used in conjunction with two wiring gutter covers to complete the trim. A door is not finished as part of the standard offering on these panelboards but can be provided, for an additional charge, using a deeper than standard box.

10.3 Panelboards and Lighting Control

Pow-R-Line C Panelboards

Application Description

Panelboard Selection Factors

In selecting a panelboard, the following factors must be considered:

- Service (voltage and frequency)
- Interrupting capacity (fully or series rated)
- Ampere rating of main
- Ampere ratings of branches
- Environment

Panelboard Short-Circuit Rating

The short-circuit rating of Eaton's assembled panelboards are test verified by, and listed with, Underwriters Laboratories (UL). Generally, these ratings are that of the lowest interrupting rated device in the panel.

Certain exceptions to this rule exist where branch devices have been UL tested in combination with specific main devices having a higher interrupting rating. Where these defined main devices and branch breaker combinations are utilized, the series short-circuit rating of the assembled panelboard will be the same as the tested rating of the approved rated main device in series with the branches. Available main and branch breaker combinations are tabulated starting on **Page 366**. All combinations shown are UL tested and listed.

These series ratings apply to panels having main devices, or main lug only panelboards fed remotely by the device listed in the series ratings chart as the main, for which UL listed tests were conducted.

Service Entrance Equipment

The National Electrical Code (NEC) requires that:

- A panel used as service entrance equipment must be located near the point where the supply conductors enter the building
- A panelboard having main lugs only shall have a maximum of six service disconnects to de-energize the entire panelboard from the supply conductors. Where more than six disconnects are required, a main service disconnect must be provided
- A disconnectable electrical bond must be provided between the neutral and ground
- A service entrance type UL label must be factory installed
- Ground fault protection of equipment shall be provided for each service disconnect rated 1000A or more if the electrical service is a solidly grounded wye system of more than 150V to ground, but not exceeding 600V phase-to-phase

Note: Service entrance panels must be identified as such on the order.

Panelboard Standards

In 2008, both the National Electrical Code (Article 408) and UL 67 were updated to remove the mandated 42-circuit limitation. Eaton offers panelboards with more than 42 circuits for those jurisdictions that have adopted the 2008 NEC or later.

For jurisdictions that have not adopted the 2008 or later version of the National Electrical Code, the 42-circuit limitation for Lighting and Appliance Branch Panelboards remains in place. Check with your local code officials to determine specific jurisdiction status.

Panelboard Installation

NEC requires that the operating handle of the topmost mounted device be no more than 6 feet 7 inches (2006.6 mm) above the finished floor and should be installed per NEC and manufacturer's instructions.

Additional boxes and fronts are required when the components required for one panelboard exceed the standard box dimensions.

Multi-Section Panelboards

When two or more separate enclosures are required, separate fronts for each box are standard. A common front can be furnished at additional charge.

Interconnecting Multi-Section Panelboards

When a panelboard, for connection to one feeder, must be furnished in more than one section (Box), each section must be furnished with main bus and terminals of the same rating, unless a main overcurrent device is provided in each section.

Sub-feed or through-feed provisions must also be included (and priced) to provide connection capability to the second section.


Note: Sub-feed or through-feed lugs cannot be used on any panelboard that is not protected by a single main overcurrent device either in the panelboard or immediately upstream, i.e., service entrance panelboards with main lugs only using the six disconnect rule.

Sub-Feed Lugs

Sub-feed lugs (see figure below) are one means of interconnecting multi-section panelboards. The sub-feed (second set of) lugs are mounted directly beside the main lugs. These are required in each section except the last panel in the lineup. The feeder cables are brought into the wiring gutter of the first section and connected to the main lugs. Another set of the same size cables are connected to the sub-feed lugs (Section 1) and are carried over to the main lugs of the adjacent panel. Cross connection cables are not furnished by Eaton. Sub-feed lugs are only available on main lug only panels.

Note: Sub-feed lugs may not be used on main lug only (six disconnect rule) service entrance panels.

Sub-Feed Lugs

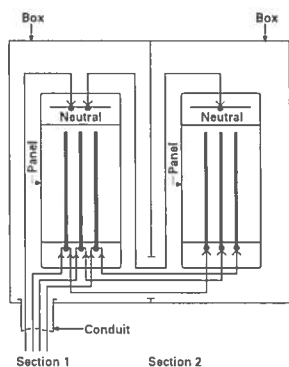


Through-Feed Lugs

Through-feed lugs (see figure below) are another method to interconnect multi-section panelboards. The incoming feeder cables are connected to the main lugs or main breaker at the bottom of panel (Section 1). Another set of lugs (through-feed) are located at the opposite end of the main bus. The interconnecting cables are connected to the through-feed lugs in Section 1 and are carried over to the main lugs in Section 2. The connection arrangement could be reversed, i.e., main lugs at top; through-feed lugs at bottom end of panel. Cross cables are not furnished by Eaton.

Note: Through-feed lugs may not be used on main lug only (six disconnect rule) service entrance panels.


Through-Feed Lugs

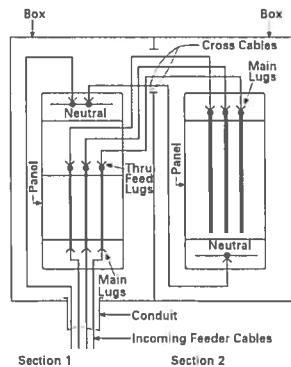

Multiple Section Panelboard—Flush Mounted

Shown below is the standard method for flush mounting multiple section lighting and distribution panelboards using standard flush trims.

Multiple Section Panelboard Flush Mounted—Dimensions in Inches (mm)

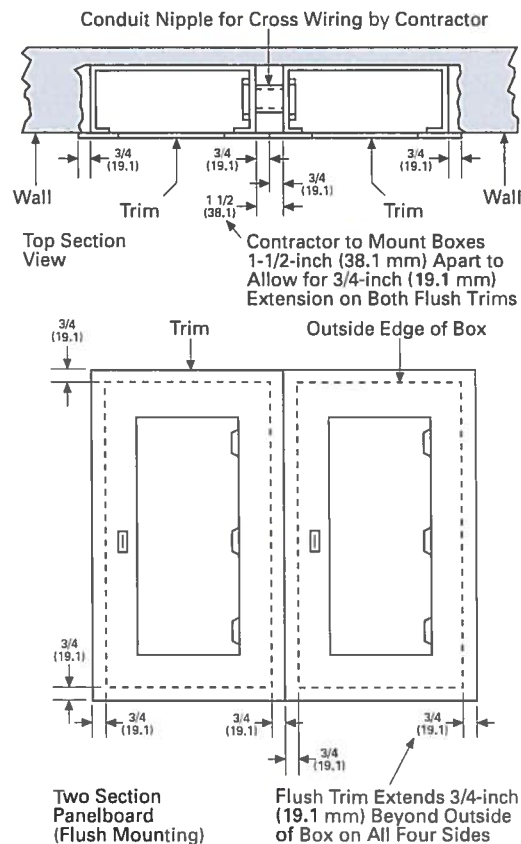

Overcurrent Protection

The following requirements will be found in the NEC:

Each lighting and appliance branch circuit panelboard shall be individually protected on the supply side by not more than two main circuit breakers or two sets of fuses having a combined rating not greater than that on the panelboard.

10.3 Panelboards and Lighting Control

Pow-R-Line C Panelboards

10

Branch Circuit Loading for Lighting Panels

The size of mains and branches should be selected based on the following:

- Motor circuits: NEC Article 430
- Diversity factor
- Provision for future loading

Exception Number 1:

Individual protection for a lighting panelboard is not required when the panelboard feeder has overcurrent protection not greater than that of the panelboard.

Exception Number 2:

For existing installations, individual protection for lighting panelboards is not required where such panelboards are used as service equipment in supplying an individual residential occupancy and where any bus supplying 15 or 20A circuits is protected on the supply side by an overcurrent device.

Ambient Temperatures

The primary function of an overcurrent device is to protect the conductor and its insulation against overheating. In selecting the size of the devices and conductors, consideration should be given to the ambient temperature surrounding the conductors within and external to the panelboard. Cumulative heating within the panelboard may cause premature operation of the overcurrent protective devices.

Underwriters Laboratories test procedures are based, in part, on 80% loading of panelboard branch circuit devices. The NEC limits the loading of overcurrent devices in panelboards to 80% of rating where in normal operation the load will continue for three hours or more. Further derating may be required, depending on such factors as ambient temperature, duty cycle, frequency or altitude.

Exception: There is one exception to this rule in both UL and NEC. It applies to assemblies and overcurrent devices that have been listed for continuous duty at 100% of its rating.

Special Conditions

Standard panelboards, assembled with standard components, are adequate for most applications. However, special consideration should be given to those required for application under special conditions such as:

- Excessive vibration or shock
- Frequencies above 60 cycles
- Altitudes above 6600 feet (2011.7m)
- Damp environment (possible fungus growth)
- Compliance with federal, state and municipal electrical codes and standards

Seismic Considerations

The Uniform Building Code® and the International Building Code, as well as local and state building codes, place an emphasis on seismic building design requirements. Electrical distribution systems are treated as attachments to the building and therefore, fall into this category.

All Eaton panelboards are seismic qualified at the highest possible level, and have been tested in accordance with ANSI C37.81. This standard quantifies actual earthquake conditions, as well as equipment seismic capability.

Harmonic Currents

Standard panelboard neutrals are rated for 100% of the panelboard current. However, since harmonic currents can cause overheated neutrals, an option is provided for neutrals to be rated at 200% (1200A maximum neutral for 600A main bus) of the panelboard phase current.

Panelboards with the 200% rated neutral are UL listed as suitable for use with non-linear loads.

Prior to specifying the 200% rated neutral, Eaton recommends a harmonic survey be conducted of the distribution system, be it new or existing.

Surge Protective Devices

The quality of power feeding sensitive electronic loads is critical to the reliable operation of any facility. In modern offices, hospitals, and manufacturing facilities, the most frequent causes of microprocessor-based equipment downtime and damage are voltage transients and electrical noise.

Electrical loads and microprocessor-based equipment are highly susceptible to both high and low energy transients. High energy transients include lightning induced surges and power company switching. These high energy transients can destroy components instantly.

More frequently the electrical system experiences low energy transients and high frequency noise.

The effects of continual low energy transients and high frequency noise can cause erratic equipment performance or sudden failure of electronic circuit board components.

Eaton can provide protective and diagnostic systems integral to panelboards. The surge protective device (SPD) is integrated into the panelboards using a “zero lead length” direct bus bar connection.



Pow-R-Line 4

The SPD protects sensitive electronic equipment from the damaging effects of high and low energy transients, as well as high frequency noise.

Standards and Certifications

Eaton’s panelboards are designed to meet the following applicable industry standards, except where noted:

- Underwriters Laboratories:
 - Panelboards: UL 67
 - Cabinets and Boxes: UL 50

Note: Only panelboards containing UL listed devices can be UL labeled.

- National Electrical Code
- NEMA Standards: PB 1
- Federal Specification W-P-115c:
 - Circuit Breakers—Type I Class I
 - Fusible Switch—Type II Class I



Technical Data and Specifications

Panelboard Selection Guide

Panelboard Type	Device Type	Maximum Voltage Rating		Maximum Main Rating (Amperes)		Branch Circuits Ampere Range	Sub-Feed Breaker Maximum Amperes	AC Interrupting Capacity rms Symmetrical Amperes (kA)	
		AC	DC	MLO	Main Device			Fully Rated	Series Rated
PRL1a	Breaker	240	—	400	400	15–100	400	10–22	22–100
PRL1R	Breaker	240	—	225	225	15–100	—	10–22	22–100
PRL1aF	Fusible	240	—	400	400	15–30	400	200	—
PRL1a-LX	Breaker	240	—	225	225	15–100	—	10–22	22–100
PRL2a	Breaker	240	250	400	400	15–100	400	65	65–200
	Breaker	480Y/277	250	400	400	15–100	400	14	22–150
PRL2R	Breaker	240	—	225	225	15–100	—	10–22	22–200
	Breaker	480Y/277	—	225	225	15–100	—	14	22–100
PRL2aF	Fusible	480Y/277	—	400	400	15–30	400	200	—
PRL2a-LX	Breaker	240	250	225	225	15–100	—	65	65–200
	Breaker	480Y/277	250	225	225	15–100	—	14	22–150
PRL3a	Breaker	240	250	800	600	15–225	600	10–200	22–200
	Breaker	480	250	800	600	15–225	600	14–100	22–150
	Breaker	600	250	800	600	15–225	600	14–35	—
PRL3E	Breaker	240	250	600	600	15–125	400	25–100	100–200
	Breaker	480Y/277	250	600	600	15–125	400	18–65	65–100
	Breaker	480	250	600	600	15–125	400	18–65	65–100
PRL4B	Breaker	240	600	1200	1200	15–1200	—	10–200	22–200
	Breaker	480	600	1200	1200	15–1200	—	14–200	22–150
	Breaker	600	600	1200	1200	15–1200	—	14–200	—
PRL4F	Fusible	240	250	1200	1200	30–1200	—	100–200	—
	Fusible	600	250	1200	1200	30–1200	—	100–200	—
PRL5P	Breaker	240	250	1200	1200	15–1200	—	10–200	22–200
	Breaker	480	250	1200	1200	15–1200	—	14–200	22–150
	Breaker	600	250	1200	1200	15–1200	—	14–200	—
PRC100/50 PRC25	Breaker	240	—	400	400	15–225	—	10–65	22–100
	Breaker	480Y/277	—	400	400	15–225	—	14	65–100
Elevator Control	Fusible	240	—	800	800	15–200	—	200	—
	Fusible	480Y/277	—	800	800	15–200	—	200	—
	Fusible	480	—	800	800	15–200	—	200	—

10.3 Panelboards and Lighting Control

Pow-R-Line C Panelboards

10

Terminal Wire Ranges, Pressure-Type Al/Cu Terminals Except as Noted

Note: All terminal sizes are based on wire ampacities corresponding to those shown in NEC Table 310-16 under the 75°C insulation columns (75°C wire). The use of smaller size, (in circular mills), regardless of insulation temperature rating, is not permitted.

Where copper-aluminum terminals are supplied on designated panelboard types, best results are obtained if a suitable joint compound is applied when aluminum conductors are used.

Check Eaton's standard terminal sizes versus customer requirements. In particular, 400 and 800A breakers often require nonstandard lugs.

Optional 750 kcmil mechanical screw-type terminals are available upon request. Panelboard dimensions may be affected, refer to Eaton.

Standard Main Lug Terminals

Panel Type	Wire Size Ranges for Ampere Capacity						
	100A	225A	250A	400A	600A	800A	1200A
PRL1a	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL2a	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL1R	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL2R	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL1aF	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL2aF	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL3a	#12-1/0	—	#6-350 kcmil	(2) #4-500 kcmil	(2) #4-500 kcmil	(3) #4-500 kcmil	—
PRL3E	#12-1/0	—	#6-350 kcmil	(2) #4-500 kcmil	(2) #4-500 kcmil	—	—
PRL4	—	—	#4-500 kcmil	(2) #4-500 kcmil	(2) #4-500 kcmil	(3) #4-500 kcmil	(4) #4-500 kcmil
PRL1a-LX	#12-1/0	#6-300 kcmil	—	—	—	—	—
PRL2a-LX	#12-1/0	#6-300 kcmil	—	—	—	—	—
PRC100/PRC50	#12-1/0	—	#6-350 kcmil	(2) #4-500 kcmil	—	—	—
PRC25	#12-1/0	#6-300 kcmil	—	(2) #4-500 kcmil	—	—	—
PRL5P	—	—	—	(1) #1/0-500 kcmil or (2) #1/0-250 kcmil	(2) #4-500 kcmil	(2) #2-500 kcmil or (3) #2-400 kcmil	(4) #4-750 kcmil
Elevator Control	—	—	#4-500 kcmil	(2) #4/0-500 kcmil	(2) #4/0-500 kcmil	(3) #4/0-500 kcmil	—

Standard Circuit Breaker Terminals

Breaker Type	Ampere Rating	Wire Range
BAB, QBHW, BABRSP, HQP, QPHW	15-70	#14-#4
	90-100	#8-1/0
EDB, EDS, ED, EDH, EDC	100-225	#4-4/0 or #6-300 kcmil
EGB, EGE, EGS, EGH	15-50	#14-3/0 AL/CU
	60-125	#6-3/0 AL/CU
EHD, FDB, FD, HFD, FDC, HFDDC ⁽²⁾	15-100	#14-1/0
	125-225	#4-4/0
FCL	15-100	#14-1/0
GHB, HGHB, GHQ, GHORSP	15-20	#14-#10
	25-100	#10-1/0
EGB, EGS, EGH	15-50	#14-1/0
	60-125	#6-2/0
JD, HJD, JDC, HJDDC ⁽²⁾	70-250	#4-350 kcmil
DK	250-350	250-500 kcmil
	400	(2) 3/0-250 kcmil or (1) 3/0-500 kcmil
KD, HKD, KDC, HKDDC ⁽²⁾ CKD, CHKD	225	(1) #3-350 kcmil
	350	(2) 3/0-250 kcmil or
	400	(2) 3/0-250 kcmil or (1) 3/0-500 kcmil
LHH	150-400	#2-500 kcmil
	150-400	(2) #2-500 kcmil
	150-400	(1) 500-750 kcmil
LGE, LGH, LGC, LGU, LHH ⁽¹⁾	250-400	(1) #2-500 kcmil
	500-600	(2) #2-500 kcmil
LD, HLD, LDC, HLDLC ⁽²⁾ CLD, CHLD	300-500	(2) 250-350 kcmil
	600	(2) 400-500 kcmil
MDL, HMDL, HMDLDC ⁽²⁾ CMDL, CHMDL	400-600	(2) #1-500 kcmil
	700-800	(3) 3/0-400 kcmil
ND, HND, CND, CHND, NDC, CNDC	800-1000	(3) 3/0-400 kcmil
	1200	(4) 4/0-500 kcmil
LCL	125-225	(1) #6-350 kcmil
	250-400	(1) #4-250 kcmil and (1) 3/0-600 kcmil
FB-P	15-100	#14-1/0
LA-P	70-225	#6-350 kcmil
	250-400	(1) #4-250 kcmil and (1) 3/0-600 kcmil
NB-P, NBDC ⁽²⁾	300-700	(2) #1-500 kcmil
	800	(3) 3/0-400 kcmil

FDPW Switch Terminals

Ampere Rating	Wire Range
30	#14-1/0
60	#14-1/0
100	#14-1/0
200	#4-300 kcmil
400	250-750 kcmil or (2) 3/0-250 kcmil
600	(2) #4-600 kcmil or (4) 3/0-250 kcmil
800	(3) 250-750 kcmil or (6) 3/0-250 kcmil
1200	(4) 250-750 kcmil or (8) 3/0-250 kcmil

Elevator Control Panel Feeder Terminals

Ampere Rating	Wire Range
30	#14-1/0
60	#14-1/0
100	#14-1/0
200	#4-300 kcmil

Notes

- ⁽¹⁾ LHH is 400A maximum.
- ⁽²⁾ Suitable for DC applications only.



TAB 2 Dry Type Transformers

Neg# D8400208D201 Alt# R001

07/24/12

16:24:19

Customer Bill of Material

1 Dry Type Transformer

Standard Transformer Catalog Number: V48M28B30EELS42

Transformer Type: General Purpose Vented

3 PHASE, 30 KVA, 480 Primary Volts, 208Y/120 Secondary Volts,

80C Temperature Rise, Aluminum Winding Material, NEMA 2 (N3R w/opt'l weathershield) Enclosure Type, 60 HZ,
Frame 912B, Wiring Diagram 280B

Standard Values

K-Factor: 1

TAPS: 2@+2.5%, 4@-2.5%

Sound Reduction: 3

NEMA ST20 Sound Level: 42

Nema TP-1 Energy Efficient: Y

Infrared Viewing Window: None

Field-Installed Accessories

Lug Kit: LKS1

Designations: TX-PDL1

1 Dry Type Transformer

Standard Transformer Catalog Number: V48G28B09

Transformer Type: General Purpose Vented

3 PHASE, 9 KVA, 480 Primary Volts, 208Y/120 Secondary Volts,

80C Temperature Rise, Aluminum Winding Material, NEMA 2 (N3R w/opt'l weathershield) Enclosure Type, 60 HZ,
Frame 912B, Wiring Diagram 278A

Standard Values

K-Factor: 1

TAPS: 2@-5%

NEMA ST20 Sound Level: 40


Infrared Viewing Window: None

Field-Installed Accessories

Lug Kit: Not Included

Designations: TX-SCL1

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.

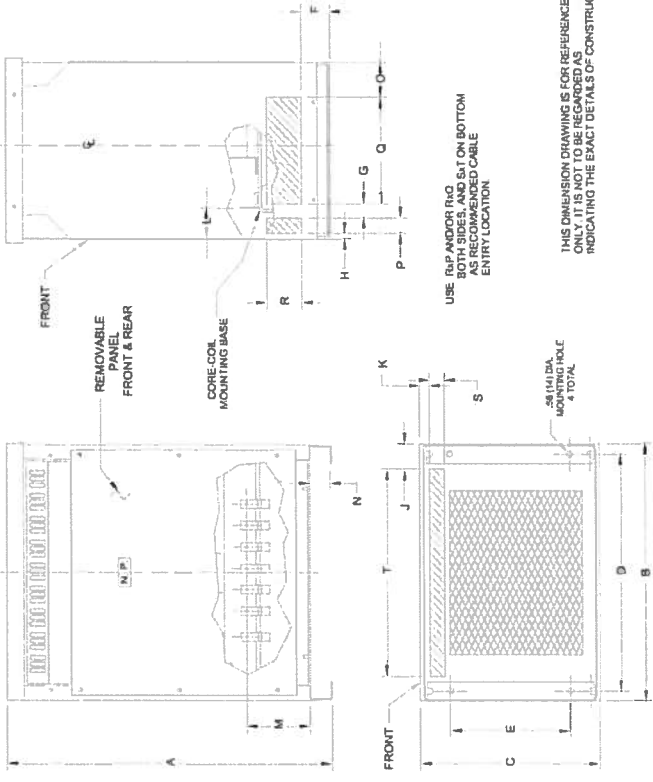


DIMENSIONS IN INCHES (NIN)

FRAME	A	B	C	D	E	F	G	H	J	K
FR912B	30.00(692)	21.00(534)	15.50(419)	21.00(534)	11.00(279)	2.82(87)	1.25(32)	50(13)	2.29(59)	06(27)
	L	M	N	O	P	O	R	S	T	
	3.00(91)	5.85(149)	1.89(49)	3.12(79)	1.40(36)	0.51(12)	3.25(83)	1.40(36)	15.50(467)	

Rev4-Eme10

VOLTS TAP

1	604
2	482
3	444
4	486
5	444
6	444
7	432

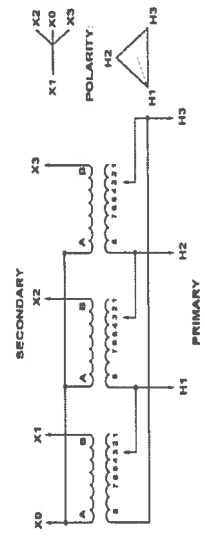

Style Number: V48M28B30EELS42

KVA Rating: 30
K-Factor: 1 Y
NEMA TP-1: Y

Primary Voltage: 480
Secondary Voltage: 208Y/120
Taps: 2@+2.5%, 4@-2.5%

Temperature Rise: 80C
Winding Material: Aluminum
Frequency (Hz): 60
Sound Level (dB): 45
Sound Reduction: 3
Average Impedance %: 3.57
Weight (lbs): 363

Accessories Included: Not Included
Lug Kit:


The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

NEG-ALT NUMBER
 D8400208D201-R001

PREPARED BY: Fitzgerald, Michael F
DATE: 07/24/12
APPROVED BY:

VERSION: 7.9
REVISION:
DWG SIZE: A

Eaton Corporation		Pittsburgh, PA	
JOB NAME: HAROLD THOMPSON PUMP & DISINFECT	DESIGNATION: TX-PDL1	DRAWING TYPE: Customer Appr.	SHEET: 1 OF 1
TYPE: V48M28B30EELS42	G.O.:	SDN0330389	

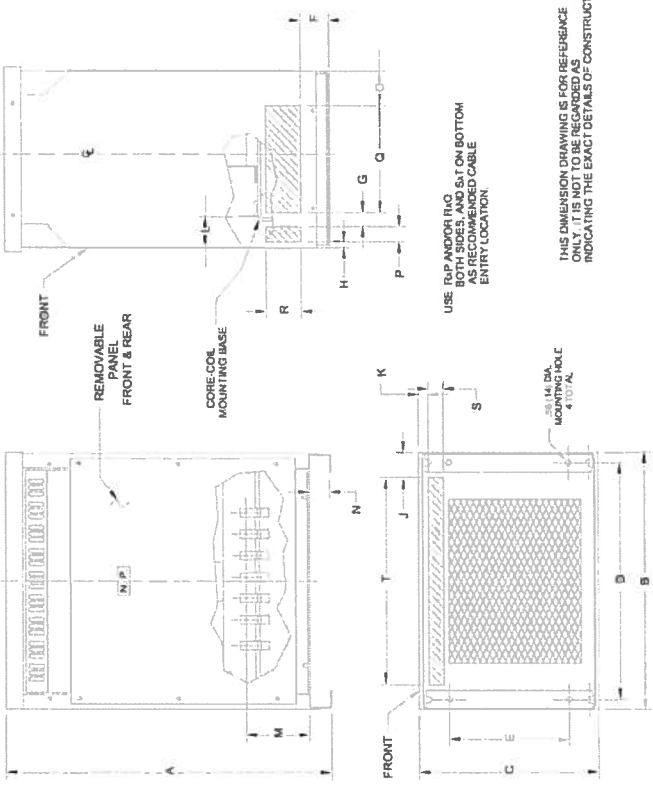

Style Number: V48G28B09
KVA Rating: 9
K-Factor: 1

Primary Voltage: 480
Secondary Voltage: 208Y/120
Taps: 2@-5%
Temperature Rise: 80C
Winding Material: Aluminum
Frequency (Hz): 60
Sound Level (dB): 40

Average Impedance %: 3.29
Weight (lbs): 190

Accessories Included: Not Included
Lug Kit:

DIMENSIONS IN INCHES (MM)

FRAME	A	B	C	D	E	F	G	H	J	K
FR912B	30.00(762)	23.00(584)	18.50(469)	21.04(534)	11.00(279)	2.82(87)	1.25(32)	5.0(13)	2.29(58)	9.6(22)
	L	M	N	O	P	Q	R	S	T	
	3.66(91)	5.89(149)	1.89(48)	3.12(79)	1.40(36)	9.51(242)	3.25(83)	1.40(36)	18.50(467)	

Rev4-Ene10

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

NEG-ALT NUMBER: D8-400208D201-R001

Eaton Corporation HAROLD THOMPSON PUMP & DISINFECT TX-SCL1	DATE: 07/24/12 DATE:	Pittsburgh, PA
DESIGNATION: TX-SCL1 TYPE: V48G28B09 G.O.: SDN0330389	VERSION: 7.9 DWG SIZE: A	DRAWING TYPE: Customer Appr. ITEM:
REVISION:	REVISION:	SHEET: 1 OF 1



Technical Data

Type DT-3

9



Product Description

Note: The following pages provide listings for most standard transformer ratings and styles. For other ratings or styles not shown, or for special enclosure types (including stainless steel), refer to Eaton.

Types DS-3, DT-3

- Ventilated, NEMA 2 enclosure standard
- Suitable for indoor applications, outdoors when weathershields are also installed
- Upright mounting only
- 220°C insulation system
- 150°C rise standard; 115°C or 80°C rise optional
- Available in single-phase ratings 15–167 kVA, 600 volts primary (DS-3)
- Available in three-phase ratings 15–1500 kVA and up to 600 volts primary (DT-3)

Application Description

NEMA TP-1-2002

compliant energy-efficient transformers are specifically designed to meet the energy efficiency standards set forth in NEMA Standards publication, TP-1-2002, "Guide for Determining Energy Efficiency for Distribution Transformers." Surveys have shown that the average loading of low voltage dry-type distribution transformers, over a 24-hour period, is approximately 35%. NEMA TP-1 compliant transformers are optimized to offer maximum efficiency at 35% of nameplate rating.

The range of products covered by NEMA TP-1-2002 are:

NEMA TP-1-2002 Product Range

Rating	Voltage Class	Voltage
	Primary voltage	34.5 kV and below
	Secondary voltage	600V and below
Dry-Type Rating	Single-phase	10–833 kVA
	Three-phase	15–2500 kVA
Liquid Rating	Single-phase	10–833 kVA
	Three-phase	15–2500 kVA

Transformers that are currently specifically excluded from the scope of NEMA Standard TP-1-2002 include:

- Liquid-filled transformers below 10 kVA
- Dry-type transformers below 15 kVA
- AC and DC drives transformers
- Rectifier transformers designed for high harmonics
- Autotransformers
- Non-distribution transformers, such as UPS transformers
- Special impedance or regulation transformers
- Regulating transformers
- Sealed and non-ventilated transformers
- Machine tool transformers
- Welding transformers
- Transformers with tap ranges greater than 15%
- Transformers with a frequency other than 60 Hz
- Grounding transformers
- Testing transformers

Efficiency levels set forth in NEMA TP-1-2002.

NEMA TP-1-2002 Efficiency Levels

Tables of Energy Efficiency
NEMA Class 1 Efficiency Levels
Dry-Type Distribution Transformers—
Low Voltage (600V and below)

Single-Phase		Three-Phase	
kVA	Efficiency	kVA	Efficiency
15	97.7	15	97.0
25	98.0	30	97.5
37.5	98.2	45	97.7
50	98.3	75	98.0
75	98.5	112.5	98.2
100	98.6	150	98.3
167	98.7	225	98.5
250	98.8	300	98.6
333	98.9	500	98.7
—	—	750	98.8
—	—	1000	98.9

Features, Benefits and Functions

- 60 Hz operation (except as noted)
- Short-term overload capability as required by ANSI
- Meet NEMA ST-20 sound levels
- Meet federal energy efficiency requirements for low voltage dry-type distribution transformers effective as of January 1, 2007

Standards and Certifications

- UL listed

**Industry Standards**

All Eaton dry-type distribution and control transformers are built and tested in accordance with applicable NEMA, ANSI and IEEE Standards. All 600 volt class transformers are UL listed unless otherwise noted.

Seismically Qualified

Eaton manufactured dry-type distribution transformers are seismically qualified and exceed requirements of the Uniform Building Code (UBC), International Building Code (IBC) and California Code Title 24.

Accessories

Please refer to Section 9.7 Page 319.

Technical Data and Specifications

Frequency

Eaton standard dry-type distribution transformers are designed for 60 Hz operation. Transformers required for other frequencies are available and must be specifically designed.

Overload Capability

Short-term overload is designed into transformers as required by ANSI. Dry-type distribution transformers will deliver 200% nameplate load for one-half hour, 150% load for one hour and 125% load for four hours without being damaged, provided that a constant 50% load precedes and follows the overload. See ANSI C57.96-01.250 for additional limitations.

Continuous overload capacity is not deliberately designed into a transformer because the design objective is to be within the allowed winding temperature rise with nameplate loading.

Insulation System and Temperature Rise

Industry standards classify insulation systems and rise as shown below:

Insulation System Classification

Ambient	+ Winding Rise	+ Hot Spot	= Temp. Class
40°C	55°C	10°C	105°C
40°C	80°C	30°C	150°C
25°C	135°C	20°C	180°C
40°C	115°C	30°C	185°C
40°C	150°C	30°C	220°C

The design life of transformers having different insulation systems is the same—the lower-temperature systems are designed for the same life as the higher-temperature systems.

Enclosures

Eaton's ventilated transformers, Types DS-3 and DT-3, use a NEMA 2 rated (drip-proof) enclosure as standard, and are rated NEMA 3R with the addition of weathershields.

Winding Terminations

Primary and secondary windings are terminated in the wiring compartment. Encapsulated units have copper leads or stabs brought out for connections. Ventilated transformers have leads brought out to terminals that are pre-drilled to accept Cu/Al lugs. Aluminum-wound transformers have aluminum terminals; copper-wound models have copper terminals. **Lugs are not supplied with these transformers.** Eaton recommends external cables be rated 90°C (sized at 75°C ampacity) for encapsulated designs and 75°C for ventilated designs.

Series-Multiple Windings

Series-multiple windings consist of two similar coils in each winding that can be connected in series or parallel (multiple). Transformers with series-multiple windings are designated with an "x" or "/" between the voltage ratings, such as voltages of "120/240" or "240 x 480." If the series-multiple winding is designated by an "x," the winding can be connected only for a series or parallel. With the "/" designation, a mid-point also becomes available in addition to the series or parallel connection. As an example, a 120 x 240 winding can be connected for either 120 (parallel) or 240 (series), but a 120/240 winding can be connected for 120 (parallel), or 240 (series), or 240 with a 120 mid-point.

For additional information, please refer to Section 9.7 Page 319.

Sound Levels

All Eaton 600 volt class general-purpose dry-type distribution transformers are designed to meet NEMA ST-20 sound levels listed here. These are the sound levels measured in a soundproof environment. Actual sound levels measured at an installation

will likely be higher (as much as 15 dB greater) due to electrical connections and environmental conditions. Lower sound levels are available and should be specified when the transformer is going to be installed in an area where sound may be a concern.

Average Sound Levels ①

NEMA ST-20 Average Sound Level in dB

kVA	Up to 1.2 kV		Above 1.2 kV
	Ventilated	Encapsulated	Ventilated
0–9	40	45	45
10–50	45	50	50
51–150	50	55	55
151–300	55	57	58
301–500	60	59	60
501–700	62	61	62
701–1000	64	63	64
1001–1500	65	64	65

Notes

① Currently being reviewed and revised by NEMA.

For other ratings or styles not shown, or for special enclosure types (including stainless steel), refer to Eaton.

EATON

Three-Phase Encapsulated (Type EPT), Ventilated (Type DT-3), 60 Hz



Type EPT Encapsulated

Product Description

Type EPT

- Sand and Resin Encapsulated design.
- Suitable for indoor or outdoor applications.
- Totally enclosed, non-ventilated enclosures.
- Enclosures are NEMA 3R rated.
- Mountable in any position indoors and upright only outdoors.
- 185°C insulation system.
- 115°C rise standard, 80°C rise optional.
- Available in ratings through 75 kVA and 4160 volts primary.

Type DT-3

- Ventilated, NEMA 2 enclosure standard.
- Suitable for indoor applications, outdoors when weathershields are also installed.
- Upright mounting only.
- 220°C insulation system.
- 150°C rise standard, 115°C or 80°C rise optional.
- Available in three-phase ratings 15 – 1500 kVA and up to 4160 volts primary.
- Do not comply with Federal Energy Efficiency requirements that go into effect January 1, 2007. Cannot be purchased for use in the United States or territories.

Application Description

The basic purpose of a transformer is voltage transformation as near as practically possible to the load for economy and distribution of power. Typical loads for dry-type distribution transformers include lighting, heating, air conditioners, fans and machine tools. Such loads are found in commercial, institutional, industrial and residential structures.

Features, Benefits and Functions

- UL listed.
- 60 Hz operation standard, 50/60 Hz operation available.
- Short-term overload capability as required by ANSI.
- Meet NEMA ST-20 sound levels.

Standards and Certifications

Industry Standards

All Cutler-Hammer dry-type distribution and control transformers are built and tested in accordance with applicable NEMA, ANSI and IEEE Standards. All 600 volt class transformers are UL listed unless otherwise noted.

Seismically Qualified

Cutler-Hammer manufactured dry-type distribution transformers are seismically qualified, and exceed requirements of the Uniform Building Code (UBC), International Building Code (IBC), and California Code Title 24.

Options and Accessories

Please refer to Page 9-146.

Product Specifications

Frequency

Cutler-Hammer standard dry-type distribution transformers are designed for 60 Hertz operation. Transformers required for other frequencies are available and must be specifically designed.

Overload Capability

Short-term overload is designed into transformers as required by ANSI. Dry-type distribution transformers will deliver 200% nameplate load for one half hour; 150% load for one hour; and 125% load for four hours without being damaged provided that a constant 50% load precedes and follows the overload. See ANSI C57.96-01.250 for additional limitations.

Continuous overload capacity is not deliberately designed into a transformer because the design objective is to be within the allowed winding temperature rise with nameplate loading.

The following pages provide listings for most standard transformer ratings and styles.

For other ratings or styles not shown, or for special enclosure types (including stainless steel) refer to Eaton.

Three-Phase Encapsulated (Type EPT), Ventilated (Type DT-3), 60 Hz

Insulation System and Temperature Rise

Industry standards classify insulation systems and rise as shown below:

Table 9-42. Insulation System Classification

Ambient	+ Winding Rise	+ Hot Spot	= Temp. Class
40°C	55°C	10°C	105°C
40°C	80°C	30°C	150°C
40°C	115°C	30°C	185°C
40°C	150°C	30°C	220°C

The design life of transformers having different insulation systems is the same — the lower temperature systems are designed for the same life as the higher temperature systems.

9

Enclosures

Eaton's Cutler-Hammer ventilated transformers, Type DT-3, utilize a NEMA 2 rated (drip-proof) enclosure as standard, and are rated NEMA 3R with the addition of weathershields. Cutler-Hammer encapsulated transformers, Type EPT, utilize a NEMA 3R rated enclosure as standard.

Sound Levels

All Cutler-Hammer 600 volt class general purpose dry-type distribution transformers are designed to meet NEMA ST-20 sound levels listed here. These are the sound levels measured in a soundproof environment. Actual sound levels measured at an installation will likely be higher due to electrical connections and environmental conditions. Lower sound levels are available and should be specified when the transformer is going to be installed in an area where sound may be a concern.

Table 9-43. Average Sound Levels ①

kVA	NEMA ST-20 Average Sound Level in dB		
	Up to 1.2 kV		Above 1.2 kV
	Ventilated	Encapsulated	Ventilated
0 – 9	40	45	45
10 – 50	45	50	50
51 – 150	50	55	55
151 – 300	55	57	58
301 – 500	60	59	60
501 – 700	62	61	62
701 – 1000	64	63	64
1001 – 1500	65	64	65

① Currently being reviewed and revised by NEMA.

Winding Terminations

Primary and secondary windings are terminated in the wiring compartment. Encapsulated units have copper leads or stabs brought out for connections. Ventilated transformers have leads brought out to aluminum pads that are pre-drilled to accept Cu/Al lugs. **Lugs are not supplied with these transformers.** Eaton recommends external cables be rated 90°C (sized at 75°C ampacity) for encapsulated designs and 75°C for ventilated designs.

Series-Multiple Windings

Series-multiple windings consist of 2 similar coils in each winding which can be connected in series or parallel (multiple). Transformers with series-multiple windings are designated with an "X" or "/" between the voltage ratings, such as voltages of "120/240" or "240 X 480." If the series-multiple winding is designated by an "X," the winding can be connected only for a series or parallel. With the "/" designation, a mid-point also becomes available in addition to the series or parallel connection. As an example, a 120 X 240 winding can be connected for either 120 (parallel) or 240 (series), but a 120/240 winding can be connected for 120 (parallel), or 240 (series), or 240 with a 120 mid-point.

Technical Data and Specifications

Please refer to **Page 9-149.**

For other ratings or styles not shown, or for special enclosure types (including stainless steel) refer to Eaton.

EATON

Catalog Number Selection

General-Purpose, Energy-Efficient, Mini-Power Center, Shielded Isolation, Nonlinear, Buck-Boost, Marine Duty Transformers—Example: S20N11S05A

<p>Prefix Options</p> <p>C = CSA labeled ventilated transformer</p> <p>Marine Duty</p> <p>QS = EPM marine (1-Ph encapsulated)</p> <p>LY = EPTM Marine (3-Ph encapsulated)</p> <p>RT = DS-3M marine (1-Ph ventilated)</p> <p>MV = DT-3M marine (3-Ph ventilated)</p>	<p>Primary Voltage</p> <p>13 = 110 x 220</p> <p>12 = 120</p> <p>10 = 120 x 240</p> <p>29 = 238</p> <p>72 = 230</p> <p>25 = 220</p> <p>23 = 230</p> <p>24 = 240</p> <p>20 = 240 x 480</p> <p>27 = 277</p> <p>38 = 380</p> <p>39 = 400</p> <p>43 = 416</p> <p>44 = 440</p> <p>45 = 450</p> <p>48 = 480</p> <p>57 = 575</p> <p>60 = 600</p> <p>42 = 2400</p> <p>46 = 4160</p> <p>49 = 4800</p> <p>40 = Export model</p> <p>54 = 120/208/240/277</p>	<p>kVA</p> <table border="1"> <tr> <td>81 = 0.05</td> <td>03 = 3</td> <td>37 = 37.5</td> <td>52 = 250</td> </tr> <tr> <td>85 = 0.075</td> <td>05 = 5</td> <td>45 = 45</td> <td>33 = 300</td> </tr> <tr> <td>82 = 0.10</td> <td>06 = 6</td> <td>50 = 50</td> <td>54 = 333</td> </tr> <tr> <td>83 = 0.15</td> <td>07 = 7.5</td> <td>75 = 75</td> <td>55 = 500</td> </tr> <tr> <td>26 = 0.25</td> <td>09 = 9</td> <td>99 = 100</td> <td>60 = 600</td> </tr> <tr> <td>51 = 0.50</td> <td>10 = 10</td> <td>12 = 112.5</td> <td>77 = 750</td> </tr> <tr> <td>76 = 0.75</td> <td>15 = 15</td> <td>49 = 150</td> <td>11 = 1000</td> </tr> <tr> <td>01 = 1</td> <td>21 = 22.5</td> <td>67 = 167</td> <td>14 = 1500</td> </tr> <tr> <td>16 = 1.5</td> <td>25 = 25</td> <td>22 = 225</td> <td></td> </tr> <tr> <td>02 = 2</td> <td>30 = 30</td> <td></td> <td></td> </tr> </table>	81 = 0.05	03 = 3	37 = 37.5	52 = 250	85 = 0.075	05 = 5	45 = 45	33 = 300	82 = 0.10	06 = 6	50 = 50	54 = 333	83 = 0.15	07 = 7.5	75 = 75	55 = 500	26 = 0.25	09 = 9	99 = 100	60 = 600	51 = 0.50	10 = 10	12 = 112.5	77 = 750	76 = 0.75	15 = 15	49 = 150	11 = 1000	01 = 1	21 = 22.5	67 = 167	14 = 1500	16 = 1.5	25 = 25	22 = 225		02 = 2	30 = 30			<p>Suffix Options</p> <p>A...Y = ①</p> <p>CU = ②</p> <p>SS = ③</p> <p>ZZ = ④</p> <p>NV = ⑤</p> <p>X = ⑥</p> <p>LS = ⑦</p> <p>AF = ⑧</p> <p>TR = ⑨</p> <p>SR = ⑩</p> <p>CE = ⑪</p> <p>T = ⑫</p> <p>EE = ⑬</p> <p>NON = ⑭</p> <p>POS = ⑮</p> <p>NEG = ⑯</p> <p>THR = ⑰</p> <p>E3 = ⑱</p> <p>SS4X = ⑲</p> <p>Z = ⑳</p> <p>S6 = ㉑</p> <p>I2 = ㉒</p> <p>I3 = ㉓</p> <p>I4 = ㉔</p> <p>N3 = ㉕</p>
81 = 0.05	03 = 3	37 = 37.5	52 = 250																																								
85 = 0.075	05 = 5	45 = 45	33 = 300																																								
82 = 0.10	06 = 6	50 = 50	54 = 333																																								
83 = 0.15	07 = 7.5	75 = 75	55 = 500																																								
26 = 0.25	09 = 9	99 = 100	60 = 600																																								
51 = 0.50	10 = 10	12 = 112.5	77 = 750																																								
76 = 0.75	15 = 15	49 = 150	11 = 1000																																								
01 = 1	21 = 22.5	67 = 167	14 = 1500																																								
16 = 1.5	25 = 25	22 = 225																																									
02 = 2	30 = 30																																										
<p>Type</p> <p>S = EP (single-phase encapsulated)</p> <p>Y = EPT (three-phase encapsulated)</p> <p>T = DS-3 (single-phase ventilated)</p> <p>V = DT-3 (three-phase ventilated)</p> <p>P = Mini-power center</p> <p>Z = Class 1 Division 2 Groups C and D</p> <p>X = Harmonic mitigating (three-phase ventilated)</p> <p>Nonlinear</p> <p>H = KT-4 (three-phase ventilated)</p> <p>B = KT-9 (three-phase ventilated)</p> <p>N = KT-13 (three-phase ventilated)</p> <p>G = KT-20 (three-phase ventilated)</p> <p>J = KT-30 (three-phase ventilated)</p> <p>A = KT-40 (three-phase ventilated)</p> <p>K = KT-50 (three-phase ventilated)</p> <p>HT = KT-4 (single-phase ventilated)</p> <p>NT = KT-13 (single-phase ventilated)</p> <p>GT = KT-20 (single-phase ventilated)</p>	<p>Taps</p> <p>D = 2 at +2.5%, 2 at -2.5%</p> <p>E = 1 at +5%, 1 at -5%</p> <p>F = 1 at -10%</p> <p>G = 2 at -5%</p> <p>J = 4 at -2.5%</p> <p>K = 1 at -10% x 2 at -5%</p> <p>L = 2 at -5% x 4 at -2.5%</p> <p>M = 2 at +2.5%, 4 at -2.5%</p> <p>N = None</p> <p>R = 1 at +5%, 2 at -5%</p> <p>P = 1 at +5%, 2 at -5% x 2 at +2.5%, 4 at -2.5%</p> <p>T = 1 at +4.2%, 1 at -4.2%</p> <p>U = 1 at +2.5%, 3 at -2.5%</p> <p>W = 1 at +3.5%, 1 at -3.5%</p> <p>X = 2 at +3.1%, 2 at -3.1%</p>	<p>Phase</p> <p>A = Buck and boost</p> <p>B = 80°C rise</p> <p>F = 15°C rise</p> <p>P = 115°C rise epoxy</p> <p>E = Electrostatic shield</p> <p>S = Single</p> <p>T = Three</p>	<p>Secondary Voltage</p> <table border="1"> <tr> <td>04 = 12/24</td> <td>20 = 240 x 480</td> </tr> <tr> <td>06 = 16/32</td> <td>21 = 240/480</td> </tr> <tr> <td>08 = 24/48</td> <td>27 = 277</td> </tr> <tr> <td>14 = 110/220</td> <td>38 = 380 delta</td> </tr> <tr> <td>12 = 120</td> <td>37 = 380Y/220</td> </tr> <tr> <td>10 = 120 x 240</td> <td>34 = 400Y/231</td> </tr> <tr> <td>11 = 120/240</td> <td>51 = 416Y/240</td> </tr> <tr> <td>54 = 127/254</td> <td>35 = 440Y/254</td> </tr> <tr> <td>19 = 190Y/110</td> <td>62 = 460Y/266</td> </tr> <tr> <td>28 = 208Y/120</td> <td>47 = 480Y/277</td> </tr> <tr> <td>29 = 208</td> <td>48 = 480 delta</td> </tr> <tr> <td>25 = 220 delta</td> <td>60 = 600 delta</td> </tr> <tr> <td>31 = 220Y/127</td> <td>61 = 600Y/346</td> </tr> <tr> <td>26 = 220 delta/110 midtap</td> <td>42 = 2400</td> </tr> <tr> <td>22 = 240 delta/120 midtap</td> <td>41 = 4160Y/2400</td> </tr> <tr> <td>64 = 240Y/139</td> <td>46 = 4160</td> </tr> <tr> <td>24 = 240 delta</td> <td>49 = 4800</td> </tr> </table>	04 = 12/24	20 = 240 x 480	06 = 16/32	21 = 240/480	08 = 24/48	27 = 277	14 = 110/220	38 = 380 delta	12 = 120	37 = 380Y/220	10 = 120 x 240	34 = 400Y/231	11 = 120/240	51 = 416Y/240	54 = 127/254	35 = 440Y/254	19 = 190Y/110	62 = 460Y/266	28 = 208Y/120	47 = 480Y/277	29 = 208	48 = 480 delta	25 = 220 delta	60 = 600 delta	31 = 220Y/127	61 = 600Y/346	26 = 220 delta/110 midtap	42 = 2400	22 = 240 delta/120 midtap	41 = 4160Y/2400	64 = 240Y/139	46 = 4160	24 = 240 delta	49 = 4800						
04 = 12/24	20 = 240 x 480																																										
06 = 16/32	21 = 240/480																																										
08 = 24/48	27 = 277																																										
14 = 110/220	38 = 380 delta																																										
12 = 120	37 = 380Y/220																																										
10 = 120 x 240	34 = 400Y/231																																										
11 = 120/240	51 = 416Y/240																																										
54 = 127/254	35 = 440Y/254																																										
19 = 190Y/110	62 = 460Y/266																																										
28 = 208Y/120	47 = 480Y/277																																										
29 = 208	48 = 480 delta																																										
25 = 220 delta	60 = 600 delta																																										
31 = 220Y/127	61 = 600Y/346																																										
26 = 220 delta/110 midtap	42 = 2400																																										
22 = 240 delta/120 midtap	41 = 4160Y/2400																																										
64 = 240Y/139	46 = 4160																																										
24 = 240 delta	49 = 4800																																										

Notes

- ① Model number is not used on newly designed/redesigned transformers.
 - ② Copper windings.
 - ③ Grade 304 stainless steel enclosure (does not imply a NEMA 4X rating).
 - ④ Open type core and coil assembly.
 - ⑤ Totally enclosed non-ventilated DS-3 or DT-3.
 - ⑥ 50/60 Hz.
 - ⑦ Low sound design. LS47 indicates low sound equal to 47 dB, LS42 indicates 42 dB.
 - ⑧ Fungus proof.
 - ⑨ Certified test report of standard production tests for the specific serial number to be shipped.
 - ⑩ Certified sound level report
 - ⑪ CE Marked.
 - ⑫ Thermal indicator embedded in center coil. Suffix "TT" indicates two thermal indicators of different temperature ratings, are installed.
 - ⑬ NEMA TP-1 efficient.
 - ⑭ 0° phase-shift (used with HMTs).
 - ⑮ +15° phase-shift (used with HMTs).
 - ⑯ -15° phase-shift (used with HMTs).
 - ⑰ -30° phase-shift (used with HMTs).
 - ⑱ CSL3 DOE 2007 energy-efficient.
 - ⑲ NEMA 4X Grade 304 stainless steel enclosure.
 - ⑳ Easy install base.
 - ㉑ Grade 316 stainless steel enclosure (does not imply NEMA 4X rating).
 - ㉒ Integral 2-inch infrared viewing window.
 - ㉓ Integral 3-inch infrared viewing window.
 - ㉔ Integral 4-inch infrared viewing window.
 - ㉕ NEMA premium efficiency.
- For Eaton's industrial control transformers catalog number selection, see **Page 316**. Contact your local Eaton sales office for voltage combinations not shown. Use table for catalog number breakdown only. Do not use to create catalog numbers because all combinations may not be valid.

EATON

Terminal Lug Kits for Type DT-3 Transformers

Typical Sizing	Terminal Lugs Cable Range	Quantity	Hardware Bolt Size	Quantity	Catalog Number
15–37.5 kVA single-phase 15–45 kVA three-phase	#14–#2	8 4	1/4-20 x 3/4	8	LKS1
50–75 kVA single-phase 75–112.5 kVA three-phase	#6–250 kcmil	12	1/4-20 x 3/4 1/4-20 x 1-3/4	8 8	LKS2
100–167 kVA single-phase 150–300 kVA three-phase	#6–250 kcmil #2–600 kcmil	3 22	1/4-20 x 3/4 3/8-16 x 2	3 16	LKS3
500 kVA three-phase	#2–600 kcmil	29	3/8-16 x 2	18	LKS4

Rodent Screens

Description	Frame Size(s) ①	Catalog Number
Rodent screens are used to discourage entry by birds or rodents.	908, 909	RS01
	910A, 911, 912	RS02
	913B, 914B, 915B	RS03
	916	RS04
	917, 918, 918A	RS05
	919, 920, 919E, 919EX, 920E, 920EX	RS06
	916A, 916B	RS07
	922	RS08
	923	RS09
	B14, B21, B14E	RS11
	815	RS12
	816	RS13
	817, 818	RS14
	819, 820	RS15
	912B, 912Z	RS16
	914D, 915D, 914Z, 915Z	RS17
	916Z	RS07

Replacement Parts for Mini-Power Centers

Frame	Deadfront Cover (Breaker Cover)	Front Cover
283	47-37503	7074C98H04
284	47-37503-2	7074C98H01
285	47-37503-3	7074C98H02
286	47-37503-4	7074C98H02
287	47-37503-5	7074C98H03
289	47-37459	7074C44H01
290	47-37459-2	7074C44H02
291	47-37459-3	7074C44H03
289A	47-42072-1	7074C44H01
290A	47-42072-2	7074C44H02
291A	47-42072-3	7074C44H03

Notes


① Effective June 1, 2001, frame numbers will have a prefix of FR, e.g., **FR819**. Dimensions, accessories and so on are still applicable as if the FR did not exist.

Lugs are rated Al/Cu and are suitable for use with either aluminum or copper conductors.

REF.
DWG. NO. 42-5203


NOTE:

1. ALL UNITS ARE DESIGNED IN ACCORDANCE WITH APPLICABLE NEMA, UL, ANSI, AND IEEE STANDARDS.
2. DRY-TYPE VENTILATED, CLASS AA, NEMA TYPE 2 ENCLOSURE.
3. FOR NEMA 3R OUTDOOR APPLICATION, USE WEATHERSHIELD # WS-38
4. TRANSFORMERS ARE FLOOR MOUNTED.
5. 220°C CLASS INSULATION SYSTEM.
6. PAINT COLOR IS ANSI #81.
7. ALUMINUM UNITS HAVE ALUMINUM WINDINGS AND TERMINATIONS. COPPER UNITS HAVE COPPER WINDINGS AND TERMINATIONS.

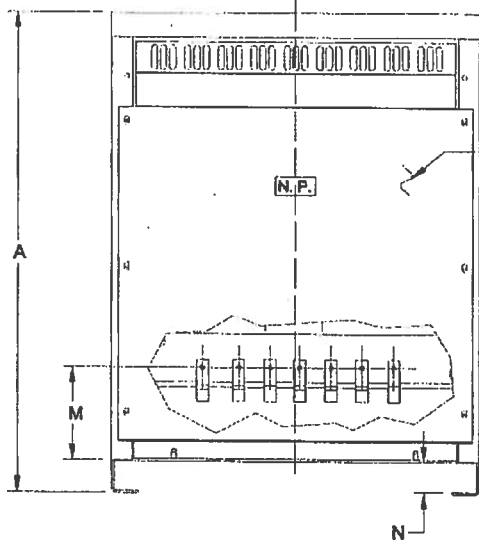


REMOVABLE
PANEL
FRONT & REAR

CORE-COIL
MOUNTING BASE

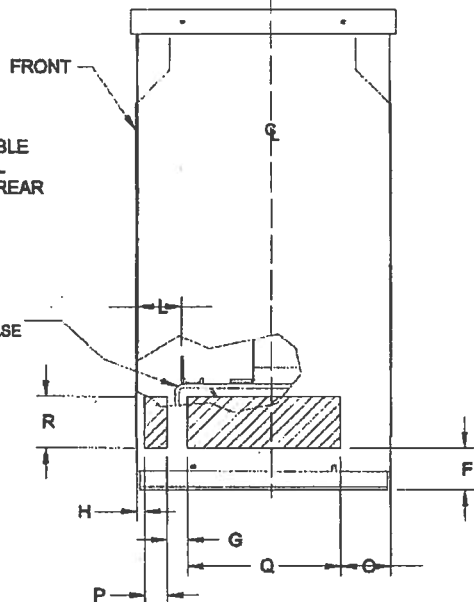

USE R&P AND/OR R&Q
BOTH SIDES, AND S&T ON BOTTOM
AS RECOMMENDED CABLE
ENTRY LOCATION.

THIS DIMENSION DRAWING IS FOR REFERENCE
ONLY. IT IS NOT TO BE REGARDED AS
INDICATING THE EXACT DETAILS OF CONSTRUCTION.

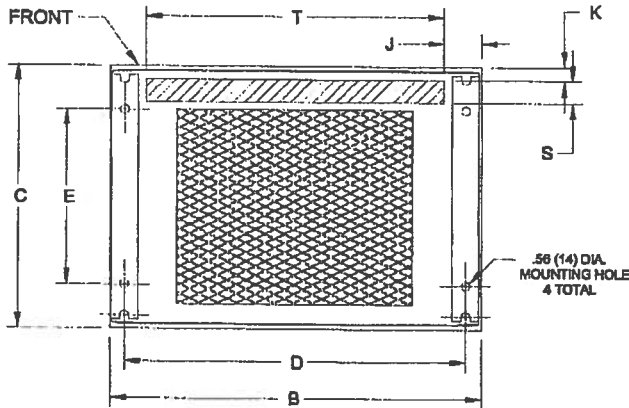

.56 (14) DIA.
MOUNTING HOLE
4 TOTAL

DIMENSIONS IN INCHES (MM)

FRAME	A	B	C	D	E	F	G	H	J	K
FR912B	30.00(762)	23.00(584)	16.50(419)	21.04(534)	11.00(279)	2.62(67)	1.25(32)	.50(13)	2.29(58)	.86(22)
	L	M	N	O	P	Q	R	S	T	
	3.60(91)	5.85(149)	1.89(48)	3.12(79)	1.40(36)	9.51(242)	3.25(83)	1.40(36)	18.50(467)	

Rev4-Ene/10

DRAFTER H.GLEZ	DATE 2/8/2010	MODEL FILENAME V45E001.lam	MODEL REV 4	EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY
ENGINEER C.BADILLO	DATE 2/8/2010	ENGINEERING CHANGE NOTICE NO.		<p>THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREIN, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS SUBJECT TO THE TERMS AND CONDITIONS OF EATON'S PROPRIETARY INFORMATION POLICY. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF EATON CORPORATION. IN THE CASE OF COMPLETING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL SURVIVE THE TERM OF THE DOCUMENT.</p>
MFG. ENCL.	DATE	UNLESS SPECIFIED TOLERANCES PER		
NEXT ASBY		A TITLE		THIRD ANGLE PROJECTION
TOOL REF.		DRY TYPE TRANSFORMER OUTLINE		
REFERENCE	SCALE 1-1	PROJECT NO.	DWG NO. FR912B	
WORK GENERAL ORDER NO.	TITLE BLOCK REV - 4	PRODUCT TRANSFORMER	PARTS LIST FR912B	SHEET 1 OF 1 REV 4



TAB 3 Enclosed Circuit Breakers

Neg# D8400208D201 Alt# C000
Job Name: HAROLD THOMPSON PUMP & DISINFECT
SDN0330389

05/21/12

17:23:48

Customer Bill of Material

1 Enclosed Breakers

Factory Assembled Enclosed Circuit Breaker
Catalog Number SNMDL3800
480Volts, 800Amps, 3 Pole, 50 KAIC

- 1 Factory Assembled Enclosed Thermal Magnetic Circuit Breaker - SNMDL3800
 - 1 Circuit Breaker Frame, Trip Unit & Terminals - MDL3800
 - 1 Circuit Breaker Enclosure - Nema 1 Surface Mounted - SNDN1200
 - 1 Enclosure Neutral Kit - DS800NK

Designations: MDCB

1 30 month EXT WTY DNT

Catalog Number:
30 month EXT WTY DNT (enclosed bkr)

Designations:

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.



Technical Data

General Description

NEMA 1 General Purpose**Surface or Flush Mounting**
15 – 1200 A, 600 Vac, 500 Vdc**NEMA 1**

Eaton's Cutler-Hammer NEMA 1 enclosed breakers are designed for indoor use in commercial buildings, apartment buildings and other areas where a general purpose enclosure is applicable. The breaker is front operable and is capable of being padlocked in the OFF position. (Padlocking not available on enclosures for QUICKLAG breakers.) Ratings through 1200 amperes are listed with Underwriters Laboratories as suitable for service entrance application. Both surface and flush mounted enclosures are available.

UL File Number E7819
CSA File Number LR84319**NEMA 3R Rainproof**
Surface Mounting**Interchangeable Hubs**
(through 400 amperes)
15 – 1200 A, 600 Vac, 500 Vdc**NEMA 3R**

This general purpose outdoor service center employs a circuit breaker inside a weatherproof sheet steel enclosure to serve as a main disconnect and protective device for feeder circuits. The operating handle can be padlocked in the OFF position, and is interlocked to prevent the door from opening when the breaker is ON. Ratings through 1200 amperes are listed by Underwriters Laboratories as suitable for service entrance application.

UL File Number E7819
CSA File Number LR84319**NEMA 4/4X, 5 Water and Dustproof****Stainless Steel — Type 304,**
Surface Mounting
15 – 1200 A, 600 Vac, 500 Vdc**NEMA 4/4X, 5**

This enclosure meets NEMA 4/4X and 5 requirements for water and dustproof applications and has no knockouts or other openings. It is particularly well suited for use in dairies, borax mines, breweries, paper mills and other process industries. The operating handle can be padlocked in the OFF position, and is interlocked to prevent the door from opening when the breaker is ON. Ratings through 1200 amperes are Underwriters Laboratories listed as suitable for service entrance application.

UL File Number E7819
CSA File Number LR84319**NEMA 12 Dustproof**
Surface Mounting**No Knockouts or Other Openings**
15 – 1200 A, 600 Vac, 500 Vdc**NEMA 12 Dustproof**

The Cutler-Hammer Type 12 enclosure is designed in line with specifications for special industry application where unusually severe conditions involving oil, coolant, dust and other foreign materials exist in the operating atmosphere. The handle padlocks in the OFF position and the cover is interlocked with the handle mechanism to prevent opening the cover with the circuit breaker in the ON position. Ratings through 1200 amperes are listed by Underwriters Laboratories as suitable

for service entrance application. A NEMA 12 semi-dust-tight design which includes knockouts is available. These units are rated 15 – 400 A, 600 Vac, 500 Vdc.

UL File Number E7819
CSA File Number LR84319**NEMA 7/9 Hazardous Location****Cast Aluminum, Explosion-proof**
Surface Mounting
15 – 1200 A, 600 Vac, 250 Vdc**NEMA 7/9 Hazardous Location**

Hazardous location, Class I, Groups B, C, D, Divisions 1, 2; Class II, Groups E, F, G, Divisions 1, 2. This special service cast aluminum enclosure is supplied with a wide, machined flanged cover to prevent igniting outside atmospheres by arcing from inside the enclosure. Front operable, the handle padlocks in the OFF position. Enclosures rated 600 amperes and above have lift-off hinges for ease of assembly.

Note: XFDN050 is not Group B compliant.**UL File Number E84577 Enclosed**
Circuit Breakers

General Description — Enclosures Only

Table 28.2-1. Enclosure Only Catalog Numbers Selection Guide

Breaker Frame	Breaker Ampere Range	Enclosure	
		NEMA Class	Catalog Number
Series C Breakers			
GC, GHC, GD 2- and 3-Pole only GHCGFEP 1-Pole Only	15 – 100	1 Surface 3R 12 12K 4/4X, 5 St. Steel	SGDN100 ^① RGDN100 JGDN100 DGDN100 WGDN100
EHD, FD, FDB, HFD, FDC	15 – 100	1 Surface 1 Flush 3R 12 12K 4/4X, 5 St. Steel	SFDN100 FFDN100 RFDN100 JFDN100 DFDN100 WFDN100
EHD, FD, FDB HFD, FDC	15 – 50 60 – 225 ^②	7/9 Cast Alum. 7/9 Cast Alum.	XFDN050B XFDN225B
FD, FDB, HFD, FDC, ED, EDH, EDC	125 – 225	1 Surface 1 Flush 3R 12 12K 4/4X, 5 St. Steel	SFDN225 FFDN225 RFDN225 JFDN225 DFDN225 WFDN225
JD, JDB, HJD, JDC	125 – 250	1 Surface 1 Flush 3R 12 12K 4/4X, 5 St. Steel	SJDN250 FJDN250 RJDN250 JJDN250 DJDN250 WJDN250
JD, JDB, HJD, JDC	125 – 250	7/9 Cast Alum.	XJDN250B
KD, KDB, HKD, KDC, DK	125 – 400	1 Surface 1 Flush 3R 12 12K 4/4X, 5 St. Steel	SKDN400 FKDN400 RKDN400 JKDN400 DKDN400 WKDN400
KD, KDB, HKD, KDC, DK	125 – 400	7/9 Cast Alum.	XKDN400B
LGE, LGS, LGH	250 – 600	1 Surface 3R 12 4/4X, 5 St. Steel	SLG630 RLG630 JLG630 WLG630
LD, LDB, HLD	300 – 600	1 Surface 3R 12 4/4X, 5 St. Steel	SLDN600 RLDN600 JLDN600 WLDN600
LD, LDB, HLD, MDL, HMDL	300 – 600 400 – 800	7/9 Cast Alum.	XMCN800B
MDL, HMDL, ND, HND	400 – 1200	1 Surface 3R 12 4/4X, 5 St. Steel	SNDN1200 RNDN1200 JNDN1200 WNDN1200
ND, HND	400 – 1200	7/9 Cast Alum.	XNDN1200B

① Suitable for use with one-pole breaker base mounting plate kit. QCCBP required.
② Maximum wire size: 4/0.

Table 28.2-2. Neutral Kits, Insulated and Groundable

Maximum Enclosure Rating (Amperes)	Main Lug Size Cu/Al	Ground Lug Size Cu/Al	Catalog Number
100 (RFDN100 and SFDN100)	(1) 14 – 1/0	(1) 14 – 2	DH100NK
100 (All Others)	(1) 14 – 1/0	(1) 14 – 1/0	INK100
250	(1) 6 – 350 kcmil	(1) 4 – 300 kcmil	INK250
400	(1) 4 – 750 kcmil or (2) 1/0 – 250 kcmil	(1) 4 – 300 kcmil	INK400
600	(2) 250 – 500 kcmil	(1) 4 – 300 kcmil	INK600
1200	(3) 1/0 to 750 kcmil or (4) 1/0 to 750 kcmil	(1) #6 – 250 kcmil	INK1200

Enclosure Only Catalog Numbers Selection Guide (Continued)

Breaker Frame	Breaker Ampere Range	Enclosure	
		NEMA Class	Catalog Number
Earth Leakage Breakers			
ELFD, ELHFD & ELFDC (3-Pole Only)	15 – 100	1 Surface 1 Flush 3R 12 12K 4/4X	SFD100E FFD100E RFDN100E JFDN100E DFDN100E WFDN100E
LGE, LGS, LGH used with ELLBN	250 – 600	1 Surface 3R 12 4/4X, 5 St. Steel	SLG630E RLG630 JLG630 WLG630
TRI-PAC Breakers			
FB-P	15 – 100	3R 12 12K 4/4X, 5 St. Steel	RFDN150 JFDN150 DFDN150 WFDN150
LA-P ^③	70 – 400	1 Surface 3R 12 4/4X	SNDN1200 RNDN1200 JNDN1200 WNDN1200
NB-P	500 – 800	12 4/4X, 5 St. Steel	JNDPN800 WNDPN800

③ Requires additional adapter plate.

Table 28.2-3. Raintight Hubs — Dimensions in Inches (mm)

Hub Diameter in Inches (mm)	Catalog Number	
	Small Hubs	
For use with RGDN and RFDN	1.00 (25.4) 1.25 (31.8) 1.50 (38.1) 2.00 (50.8)	DS100H1 DS125H1 DS150H1 DS200H1
Large Hubs		
For use with RJDN, RKDN has two cutouts	2.00 (50.8) 2.50 (63.5) 3.00 (76.2)	DS200H2 DS250H2 DS300H2
Required if using Type DS hubs on RJDN and RKDN enclosures.	DS900AK	

All rainproof enclosures 30 through 400 A are shipped with plate over cutout. Hubs are not supplied with screws on 30 through 400 A enclosures. Use screws from plate.

Table 28.2-4. Breather and Drain, Hazardous Enclosures — Dimensions in Inches (mm)

Description	Compliance	Conduit Opening	Catalog Number
A Universal Breather/Drain Fitting is installed in the top of an enclosure to provide ventilation to minimize condensation and in the bottom to allow drainage of accumulated condensation while maintaining explosion-proof integrity.	Type BD: NEMA 7 – Class I, Groups C, D; Class I, Zone 1, Group IIB NEMA 9 – Class II, Groups F, G	.50 (12.7)	XPBD2
	Type DBB: NEMA 7 – Class I, Groups B, C, D; Class I, Zone 1, Group IIB + Hydrogen NEMA 9 – Class II, Groups E, F, G	.50 (12.7)	XPDBB50

Technical Data and Specifications

NEMA 1, 12, 12K, 3R

Note: Not to be used for construction purposes unless approved.

Table 28.2-5. NEMA 1 Surface Mounted (See Figure 28.2-2)

Maximum Amperes	Dimensions in Inches (mm)						Approximate Weight in Lbs. (kg)	Catalog Number
	A	B	C	D	E	F		
100	17.50 (444.5)	8.56 (217.4)	6.28 (159.5)	13.03 (331.0)	1.20 (30.5)	17.19 (436.6)	12 (5)	SGDN100
100 ①	19.13 (485.9)	9.13 (231.9) ③	5.20 (132.1)	17.00 (431.8)	N/A ④	18.81 (477.8)	13 (6)	SFDN100
100	23.25 (590.6)	8.56 (217.4)	6.28 (159.5)	18.75 (476.3)	1.20 (30.5)	22.94 (582.7)	15 (7)	SFD100E
225 ②	23.25 (590.6)	8.56 (217.4)	6.28 (159.5)	18.75 (476.3)	1.20 (30.5)	22.94 (582.7)	15 (7)	SFDN225
250	34.70 (881.4)	10.92 (277.4)	7.20 (182.9)	30.00 (762.0)	1.88 (47.8)	34.39 (873.5)	31 (14)	SJDN250
400 ⑤	38.81 (985.8)	11.06 (280.9)	10.94 (277.9)	34.00 (863.6)	9.28 (235.7)	38.50 (977.9)	53 (24)	SKDN400
600	51.06 (1296.9)	21.87 (555.5)	9.96 (253.0)	51.63 (1311.5)	1.94 (49.3)	50.13 (1273.3)	90 (41)	SLG630
600	51.06 (1296.9)	21.87 (555.5)	9.96 (253.0)	51.63 (1311.5)	1.94 (49.3)	50.13 (1273.3)	90 (41)	SLG100E
600	45.88 (1165.4)	14.31 (363.5)	12.38 (314.5)	46.56 (1182.6)	1.91 (48.5)	45.56 (1157.2)	81 (37)	SLDN600
1200	61.22 (1555.0)	21.44 (544.6)	15.41 (391.4)	61.84 (1570.7)	1.97 (50.0)	60.91 (1547.1)	178 (81)	SNDN1200

- ① SFDN100 Series "B" released 9/15/01.
- ② Maximum wire size: 4/0.
- ③ Total width, including door clip is 9.95 inches (253 mm).
- ④ Single centered mounting hole provided.
- ⑤ Maximum wire size: 500 kcmil.

Table 28.2-6. NEMA 1 Flush Mounted (See Figure 28.2-3)

Maximum Amperes	Dimensions in Inches (mm)						Approximate Weight in Lbs. (kg)	Catalog Number
	A	B	C	D	E	F		
100	18.81 (477.8)	9.72 (246.9)	6.28 (159.5)	13.03 (331.0)	1.86 (47.2)	18.50 (469.9)	12 (5)	FFDN100
100	24.56 (623.8)	9.72 (246.9)	6.28 (159.5)	18.75 (476.3)	1.86 (47.2)	24.25 (616.0)	15 (7)	FFD100E
225 ⑥	24.56 (623.8)	9.72 (246.9)	6.28 (159.5)	18.75 (476.3)	1.86 (47.2)	24.25 (616.0)	15 (7)	FFDN225
250	36.02 (914.9)	12.23 (310.6)	7.20 (182.9)	30.00 (762.0)	1.88 (47.8)	35.70 (906.8)	32 (15)	FJDN250
400 ⑦	40.13 (1019.3)	12.38 (314.5)	10.94 (277.9)	34.00 (863.6)	2.94 (74.7)	39.81 (1011.2)	53 (24)	FKDN400

- ⑥ Maximum wire size: 4/0.
- ⑦ Maximum wire size: 500 kcmil.

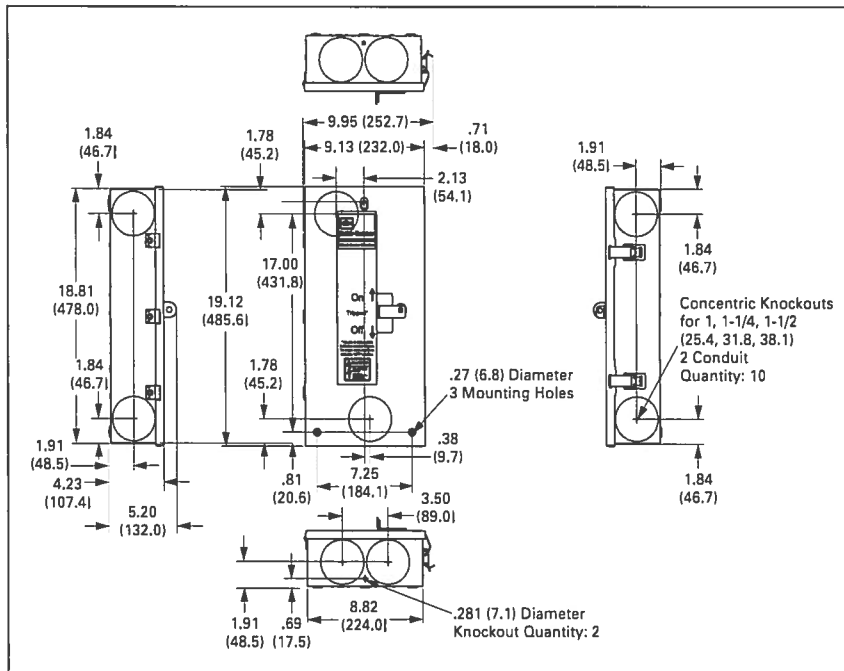


Figure 28.2-1. NEMA 1 Surface Mounted SFDN100 Series "B"

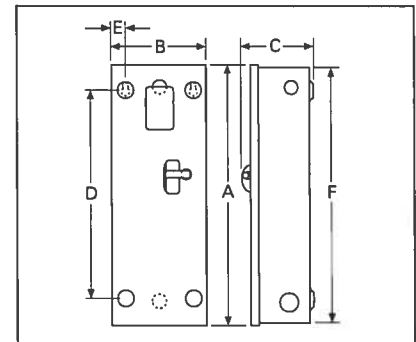


Figure 28.2-2. NEMA 1 Surface Mounted

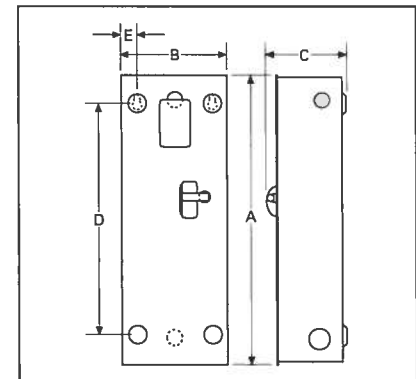


Figure 28.2-3. NEMA 1 Flush Mounted

Table 28.2-17. NEMA 7/9 Cast Aluminum with Weather Resistant Seals — 400 – 1200 Amperes

Catalog Number	Breaker Size Amperes	Dimensions in Inches (mm)									Weight ①	
		Overall Enclosure			Enclosure Mounting		Conduit		Standard Conduit			
		A	B	C	E	F	H	I	Size	Location	Lbs.	kg
XKDN400B ②	400	35.00 (889.0)	16.38 (416.1)	12.63 (320.8)	9.50 (241.3)	27.25 (692.2)	3.00 (76.2)	4.19 (106.4)	4.00 (101.6)	1, 3 & 6, 8	170	77
XLDN600B	600	37.88 (962.2)	23.88 (606.6)	14.25 (362.0)	16.00 (406.4)	45.38 (1152.7)	4.00 (101.6)	5.00 (127.0)	4.00 (101.6)	1, 3 & 6, 8	419	191
XKCN800B	800	47.88 (1216.2)	13.63 (346.2)	12.81 (325.4)	16.13 (409.7)	40.75 (1035.1)	4.00 (101.6)	4.00 (101.6)	4.00 (101.6)	1, 3 & 6, 8	228	104
XNDN1200B ③	1200	64.00 (1625.6)	26.00 (660.4)	21.38 (543.1)	27.56 (700.0)	38.63 (981.2)	6.50 (165.1)	4.38 (111.3)	4.00 (101.6)	1, 3 & 6, 8	567	257

- ① Weight values are for the enclosure only. See Table 28.2-17 for breaker weights.
- ② Maximum wire size: 500 kcmil.
- ③ Power cables must enter and leave from opposite ends (through-feed).

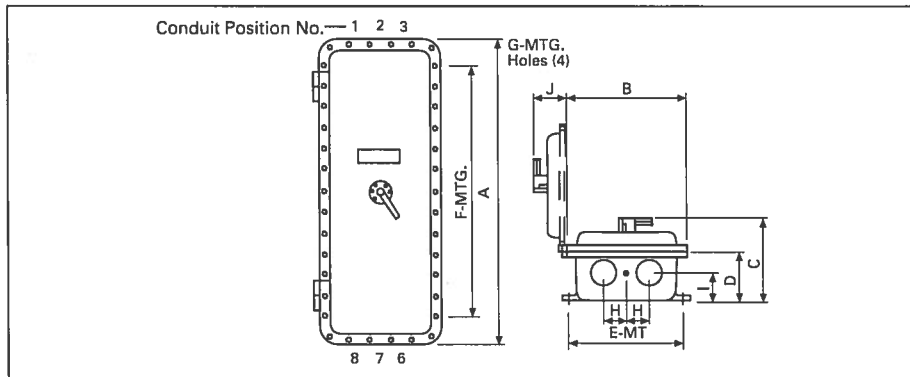


Figure 28.2-9. NEMA 7/9 Cast Aluminum with Weather Resistant Seals

Table 28.2-18. Typical Breaker Weights

Frame	Lbs.	kg
G	2	0.9
E	3	1.4
F	5	2.3
J	12	5.4
K	13	5.9
L	20	9.1
M	30	13.6
N	45	20.4

Table 28.2-19. Circuit Breaker Enclosure Interpretation Data

1st Field Enclosure Type	2nd Field Breaker Family	3rd Field Maximum Ampacity	NEMA Enclosure Type	Definitions NEMA Standard
NEMA 1	Flush	50	1	Type 1 enclosures are intended for indoor use primarily to provide a degree of protection against contact with the enclosed equipment.
NEMA 3R	Surface	100	3R	Type 3R enclosures are intended for outdoor use primarily to provide a degree of protection against falling rain, sleet, and external ice formation.
NEMA 12		150	12	Type 12 enclosures are intended for indoor use primarily to provide a degree of protection against dust, falling dirt, and dripping noncorrosive liquids.
NEMA 12K		225	12K	Type 12K enclosures with knockouts are intended for indoor use primarily to provide a degree of protection against dust, falling dirt, and dripping noncorrosive liquids other than at knockouts.
NEMA 4/4X, 5	Stainless	250	4/4X	Type 4 enclosures are intended for indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, and hose-directed water, and corrosion; and will be undamaged by the external formation of ice on the enclosure.
NEMA 7/9	Cast Al.	400	5	Type 5 enclosures are used for indoor use primarily to provide a degree of protection against dust and falling dirt.
		600	7	Type 7 enclosures are for use indoors in locations classified as Class I, Groups B, C or D as defined in the National Electrical Code. ④
		1200	9	Type 9 enclosures are for use in indoor locations classified as Class II, Groups E, F or G as defined in the National Electrical Code.

1st Field	2nd Field	3rd Field
R	FD	N 150
NEMA Enclosure	Breaker Frame	NEMA Enclosure

- ④ "N" in this position indicates enclosure complies with NEC gutter space requirement.
- ⑤ XFDN050 is not Group B compliant.

Cutler-Hammer is a federally registered trademark of Eaton Corporation. UL is a registered trademark of Underwriters Laboratories Inc. ISO is the registered trademark and sole property of the International Organization for Standardization. NEMA is the registered trademark and service mark of the National Electrical Manufacturers Association. CSA is a registered

trademark of the Canadian Standards Association. Uniform Building Code (UBC) is a trademark of the International Conference of Building Officials (ICBO). National Electrical Code and NEC are registered trademarks of the National Fire Protection Association, Quincy, Mass.

EATON

Series C Selection Data—M-Frame

Series C, M-Frame
Electronic RMS, 400–800A
Thermal-Magnetic, 300–800A



M-Frame Breaker

Table 27.4-75. Dimensions in Inches (mm)

Width	Height	Depth
8.25 (209.6)	16.00 (406.4)	4.06 (103.2)

Table 27.4-76. Thermal-Magnetic Trip Ratings

Frame	Ratings
MDL	300, 400, 450, 500, 600, 700, 800

Table 27.4-77. Digitrip 310 Electronic Trip Unit Rating Plugs

Frame	Rating Plugs
MDL	400, 500, 600, 700, 800, 400/800 adjustable

Table 27.4-78. UL 489 Interrupting Capacity Ratings

Circuit Breaker Type	Number of Poles	Trip Type ①	Interrupting Capacity (rms Symmetrical Amperes)			
			Volts AC (50/60 Hz)			Volts DC ②③
			240	480	600	250
MDL, CMDL ④	2, 3	N.I.T.	65,000	50,000	25,000	22,000
HMDL, CHMDL ④	2, 3	N.I.T.	100,000	65,000	35,000	25,000

- ① N.I.T. is non-interchangeable trip unit.
- ② Two poles or two poles of three-pole circuit breaker. Thermal-magnetic trip units only, MDL, HMDL breakers with electronic trip unit are not DC rated.
- ③ Time constant is 3 milliseconds minimum at 10 kA and 8 milliseconds minimum at 22 kA.
- ④ 100% rated. Not for use on DC.

Table 27.4-79. Line and Load Terminals

Maximum Breaker Amperes	Terminal Body Material ③	Wire Type	AWG/kcmil Wire Range/Number of Conductors	Catalog Number
-------------------------	--------------------------	-----------	---	----------------

Standard Cu/Al Pressure Terminals

600	Aluminum	Cu/Al	(2) #1–500 kcmil	TA700MA1
800	Aluminum	Cu/Al	(3) 3/0–400 kcmil	TA800MA2
800	Aluminum	Cu/Al	(2) 500–750 kcmil	TA801MA

Optional Copper and Cu/Al Pressure Type Terminals

600	Copper	Cu	(2) 2/0–500 kcmil	T600MA1
800	Copper	Cu	(3) 3/0–300 kcmil	T800MA1

③ UL listed for use with copper or aluminum conductors as noted.

EATON

Options and Accessories

Table 8-1. Safety Switches — Accessories

Description	Catalog Number	Price U.S. \$
Neutral Kits/Ground Kits 30 A DG 60 – 100 A DG 200 A DG, DH (NEMA 1, 3R Enclosures) 30 – 60 A DH 100 A DH 200 A DH (NEMA 4X, 12 Enclosures) 400 A DG, DH 600 A DG, DH 400 – 600 A Fusible DT, 800 – 1200 A DH 30 – 100 A DT 200 A DT 400 A Non-Fusible DT 600 A Non-Fusible DT	DG030NB DG100NB DG200NK DH030NK DH100NK DH200NK DS400NK DS600NK DS800NK DT100NK DT200NK DT400NK DT600NK	
Ground Lug Kits 30 – 100 A DG 30 – 100 A DH, DT ① 200 A DG, DH, DT 400 – 600 A DG, 400 – 1200 A DH, 400 – 800 A DT	DG030GB DS100GK DS200GK DS468GK	
Switching Neutral Bonding Kits ② 30 – 100 A DT, 3P, 4P Non-Fusible 200 A DT, 3P, 4P Non-Fusible 400 A DT, 3P, 4P Non-Fusible 600 A DT, 3P, 4P Non-Fusible 800 A DT, 3P, 4P Non-Fusible	DT100BK DT200BK DT400BK DT600BK DT800BK	
Control Pole Kit (for 2P, 3P Switches) 400 – 600 A DG, 30 – 1200 A DH, 30 – 800 A DT	DS16CP	
Auxiliary Contact Kits All Switches (except 30 – 100 A DG) 1NO/1NC All Switches (except 30 – 100 A DG) 2NO/2NC NEMA 7/9 Switches (30 – 100 A) 1NO/1NC NEMA 7/9 Switches (30 – 100 A) 2NO/2NC NEMA 7/9 Switches (200 A) 1NO/1NC NEMA 7/9 Switches (200 A) 2NO/2NC	DS200EK1 DS200EK2 178C265G05 178C265G06 178C619G01 178C619G02	
Copper Lug Kits 30 A DH, DT ② 60 A DH, DT ② 100 A DH, DT ② 200 A DH ② 400 A DH (NEMA 4, 4X, 12 Enclosures) ③ 600 – 800 A DH (NEMA 4, 4X, 12 Enclosures) ③	DS16CL DS16CL DS36CL DS46CL DS56CL DS66CL	
Crimp Lug Pad Kit (NEMA 4, 4X, 12 Enclosures) 400 – 600 A DH ② 800 A DH ③ 400 – 800 A Neutral DH ④	DS56CK DS76CK DS800CNK	
Fuse Puller Kits 30 – 60 A DH ② 30 – 60 A DH ③ 100 A DH ② 200 A DH ②	DS30FP DS60FP DS100FP DS200FP	
"J" Fuse Adapter Kits 60 A 240 Volt DH ② 60 A DT and Receptacle Switches ② 400 A 600 Volt DT ⑥ 600 A 240 – 600 Volt DH, 600 A DG ③	DS22JK DS26JK DT400JK DS600JK	

① Ground bar kit is not listed on device publications.

② Order one kit for 3 poles.


③ Order one kit for each pole.

④ Order one kit per switch.

⑤ Receptacle switches.

⑥ Order one kit for 6 poles.


Note: Accessories are not applicable to NEMA 7/9 switches unless indicated otherwise.




DH030NK




DS200GK



DT100BK




DS16CP




DS200EK1




DS36CL



DS56CK



DS60FP



DS22JK

Note: A factory installed ground lug is supplied on all NEMA 4, 4X and 12 safety switches, as well as all 400 ampere and higher NEMA 1 and 3R safety switches. A factory installed ground lug is also supplied on all Heavy-Duty NEMA 1 and 3R 30 – 200 ampere switches that do NOT have a factory installed neutral.

Discount Symbol 22CD



TAB 4 Safety Switches

Neg# D8400208D201 Alt# C000
Job Name: HAROLD THOMPSON PUMP & DISINFECT
SDN0330389

05/21/12

17:26:00

Customer Bill of Material

- 1 30 month EXT WTY Switch
Catalog Number:
30 month EXT WTY for switches

Designations:

- 4 Safety Switches
DH361FRK,
BE90B, 600 VAC/DC, 30 Amps, 3-Pole, Fusible with No Neutral, NEMA 3R Enclosure
 - 1 Heavy Duty Switch - Fusible, 3-Pole, 600 VAC, 30 A, NEMA 3R (DH361FRK)
 - 1 Equipment Ground Lugs (DS100GK)

Designations:

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.

Safety Switch General Information

Global Specifications

System Voltage	600 VAC/DC
Switch Type	Single Throw - Heavy Duty
Poles/Blades	3-Pole
Amperage	30
Protection	Fusible with No Neutral
Enclosure Type	NEMA 3R
Special Paint	ANSI-61 (Gray) Standard
Fuse Clips	Standard
Switch Lugs	Standard
Fungus Proof Treatment	N
Lock-On Provision	N
Trapped Key Interlock	None
Fuse Pullers	N
Control Pole	N
Ground Lugs	Y
316 Stainless	N
Stainless Mechanism	N
Mill Duty	N

Cover Controls

Nameplate

Field Installed Kits

Safety Switch Catalog No.
DH361FRKG

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY KDUVAL	DATE 05/14/12	Eaton Corporation			
APPROVED BY	DATE	JOB NAME HAROLD THOMPSON PUMP & DISINFECT	DESIGNATION		
VERSION 7.8		TYPE	DRAWING TYPE Customer Appr.		
NEG-ALT NUMBER D8400208D201-C000	REVISION	DWG SIZE A	G.O. SDN0330389	ITEM 009	SHEET 1 OF 1

FIG. NO.	A	B	C	D	E	F	G	H	J	K	L	M	N	CONDUIT K.O. QTY. & SIZES		DESCRIPTION
														1	2	
12	15.12	—	15.43	21.99	20.00	—	12.75	7.4	—	—	—	—	—	④	3/4-1-1/4	100 AMP 4 POLE TYPE 1
11	19.69	2.44	8.12	16.27	14.25	3.66	6.50	5.6	1.38	1.58	1.44	—	—	⑤	3/4-1-1/4	30 & 60 AMP 3 POLE TYPE 3R
10	19.69	2.44	8.06	16.00	14.25	3.66	6.50	5.6	1.38	1.58	1.44	1.44	⑩	3/4-1-1/4	30 & 60 AMP 3 POLE TYPE 1	
8	10.78	3.50	11.09	21.99	20.00	4.50	9.50	7.4	1.88	1.88	—	—	—	⑤	1/4-1/2-2	100 AMP 3 POLE TYPE 3R
7	10.78	3.50	11.09	21.99	20.00	4.50	9.50	7.4	1.88	1.88	—	—	—	⑩	1/4-1/2-2	100 AMP 3 POLE TYPE 1
5	11.87	2.38	12.18	16.00	13.75	—	10.00	1.06	—	—	—	—	—	⑦	1/2-3/4-1	30 & 60 AMP 4 POLE TYPE 1

CUTLER-HAMMER
PITTSBURGH, PA.

DATE: 10/5/82
APPROVED: EDDIE CARSON
DATE: 10/5/82
APPROVED: J. BISCHOF

FILE NAME: 95-955.DWG
FEDERAL ID NUMBER: 0V69-1069

SCALE: 1-3

PRODUCT CODE: B1
REASON: B1

ENG. NO. 95-955
SHEET NO. 1 OF 1

TYPE: DIMENSION SHEET 30, 60, & 100 AMP TYPE 1 & 3

DATE: 5/17/82
REVISED: 12/1/80
REVISED: 12/1/80

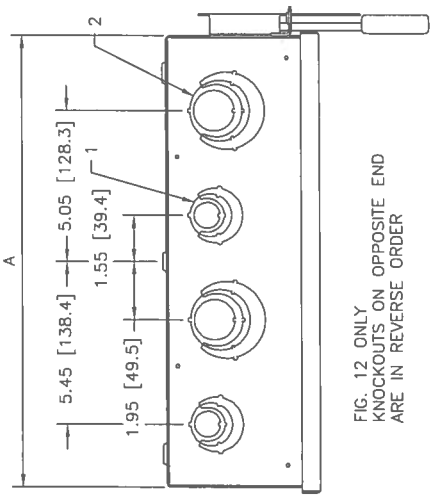


FIG. 11 ONLY
KNOCKOUTS ON OPPOSITE END
ARE IN REVERSE ORDER

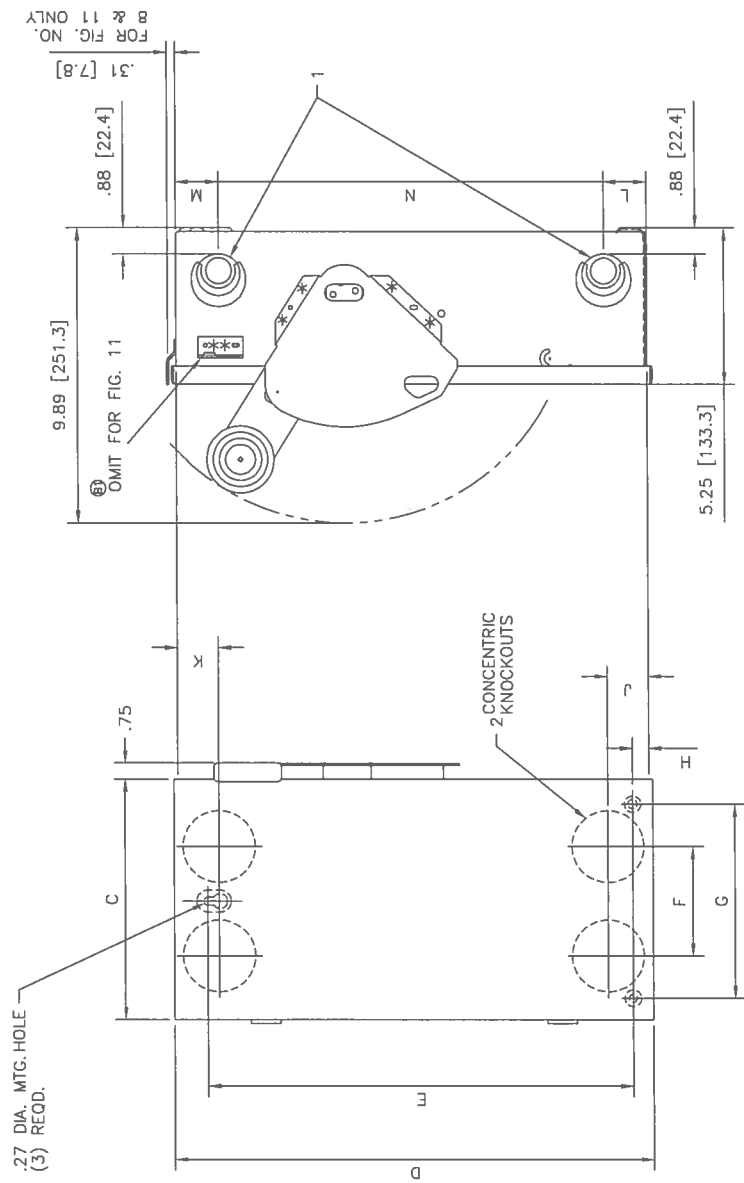


FIG. 12 ONLY
KNOCKOUTS ON OPPOSITE END
ARE IN REVERSE ORDER

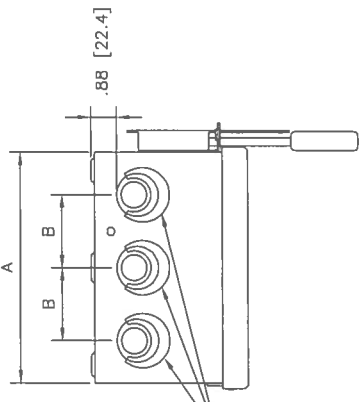


FIG. 13 ONLY
KNOCKOUTS TO BE OMITTED
IN TOP ENDWALL FOR
FIG. NO. 8 & 11 ONLY.



Technical Data

Product Description

Product Description

- Used to open or close a circuit.
- Non-fusible safety switches provide a means to manually connect or disconnect the load from the source.
- Fusible safety switches provide a means to manually open and close a circuit and overcurrent protection by means of installed fuses.
- Also commonly referred to as a disconnect switch or disconnect.
- Available from 30 – 1200 amperes.

Application Description

8

General Duty



*Plug Fuse
General-Duty
Safety Switch*




*Cartridge Fuse
General-Duty
Safety Switch*

For residential and commercial applications. Suitable for light-duty motor circuits and service entrance.

- 30 – 600 amperes.
- Suitable for service entrance applications unless otherwise noted.
- Fusible and non-fusible switches are 100% load break and 100% load make rated.
- The continuous load current of fusible switches is not to exceed 80% of the rating of fuses employed in other than motor circuits. Non-fusible switches are 100% fully rated.
- 200 – 600 amperes features K-series design.
- Horsepower rated.
- Fusible and non-fusible switches. One-pole S/N through 4-wire; 120/240, and 240 Vac.
- Ample wire bending space provides for easier installation.
- With Class R fuses, switches may be used on systems capable of delivering 100,000 amperes rms symmetrical.

Note: Plug fuse switches are not service entrance rated.

Heavy Duty




Heavy-Duty Safety Switches

For heavy commercial and industrial applications where reliable performance and service continuity are critical.

- 30 – 1200 amperes.
- 600 Vac, 600 Vdc maximum.
- Horsepower rated.
- Fusible and non-fusible switches are 100% load break and 100% load make rated.
- The continuous load current of fusible switches is not to exceed 80% of the rating of fuses employed in other than motor circuits. Non-fusible switches are 100% fully rated.
- Suitable for service entrance applications unless otherwise noted.
- Visible double break quick-make, quick-break rotary blade mechanism. Two points of contact provide a positive open and close, easier operation, and also help prevent contact burning for longer contact life.
- Triple padlocking capability. Personnel safety feature since the large hasp can accommodate up to three 3/8-inch (9.5 mm) shank locks. Cabinet door can be further padlocked at the top and bottom.
- Interlocking mechanism. Door cannot be opened when the handle is in the ON position. Built-in defeater mechanism provides for user access when necessary.
- For the toughest heavy commercial and industrial applications, refer to **Page 8-47** for catalog information on our Mill-Duty Safety Switch.
- Deionizing arc chutes. Arc chutes confine and suppress the arcs produced by opening contacts under load.

6-Pole Switches



6-Pole Motor Circuit

A compact safety switch that's ideal for use in heavy industry...when an "in sight" disconnecting means is required for two-speed motors that are remote from their motor control devices.

- 600 Vac, 250 Vdc maximum.
- 30 – 200 amperes.
- Fusible or non-fusible.
- Trunk-type latches keep the cover tightly closed and a neoprene gasket seals out moisture and dust from the switch assembly.
- Visible double break quick-make, quick-break rotary blade mechanism. Two points of contact provide a positive open and close, easier operation, and also help prevent contact burning for longer contact life.
- Clear line shield protection.
- Built-in fuse pullers.
- Clearly visible handle.
- Triple padlocking capability. Cabinet door can be further padlocked at the top and bottom.
- Deionizing arc chutes. Arc chutes confine and suppress the arcs produced by opening contacts under load.

Product Description

- **Receptacle Switches** — These heavy-duty switches are pre-wired and interlocked to polarized receptacles for 3-phase, 3-wire, grounded type power plugs. These are used for portable power applications such as welders, infrared ovens, batch feeders, conveyors, truck and marine docks. Receptacles are interlocked to handle mechanisms so that power plugs may not be inserted or removed when the switch is in the ON position unless noted otherwise. Ratings are 30 – 100 amperes, 600 Vac, NEMA 12/3R, 4X stainless steel enclosures.
- **Non-Metallic Switch** — This switch has a Halyester or KRYDON™ enclosure. These are compression molded fiberglass reinforced polyester enclosure, which is capable of withstanding almost any corrosive environment. Ratings are 30 – 200 amperes, 240 – 600 Vac, fusible and non-fusible. Enclosure is NEMA 4X rated.
- **NEMA 7/9 Hazardous Location Disconnect Switch** — See Page 8-43 for information.

Features, Benefits and Functions

General-Duty (Cartridge Fuse)

- Visible double break quick-make, quick-break rotary blade mechanism.
- Side opening door on all enclosures.
- Mechanically interlocked cover to prevent easy access when the switch is in the ON position.
- With Class R fuses, switches may be used on systems capable of delivering 100,000 amperes rms symmetrical.
- Clearly visible and accessible neutral where applicable.
- Visible ON/OFF indication.
- Tangential knockouts on 30 – 60 ampere designs.
- Ample wiring space.
- Double padlocking capability on 30 – 100 amperes.
- Triple padlocking capability on 200 – 600 amperes.
- Additional door locking capability.
- Bilingual English/Spanish door label on 30 – 100 amperes.
- Tri-lingual nameplates.

Heavy-Duty

- Visible double break quick-make, quick-break rotary blade mechanism.
- Mechanically interlocked cover to prevent easy access when the switch is in the ON position.
- Clear line shield with probe holes.
- Clearly visible palm fitting red handle.
- Triple padlocking capability.
- Deionizing arc chutes to confine and suppress the arcs produced by opening contacts under load.
- Tangential knockouts on NEMA 1 and NEMA 3R enclosures through 200 amperes.
- Built-in fuse pullers on NEMA 4X and NEMA 12 enclosures through 200 amperes.
- Additional door locking capability.
- Complete accessory and renewal parts data shown on inner door label.
- 30 – 800 ampere NEMA 12 designs convertible to NEMA 3R by opening factory installed drain hole.
- 30 – 800 ampere switches are seismic qualified and exceed the requirements of the Uniform Building Code® (UBC) and California Code Title 24.
- Tri-lingual nameplates.

Standards and Certifications

- UL 98.
- UL 50.
- NEMA KS-1.

Elevator Control Switch



Elevator Control Switch

Features, Benefits and Functions

Standard Features

- 30 – 200 ampere 600 Vac 3-phase fused power switch.
- 200,000 ampere rms short-circuit current rating.
- Shunt trip 120 volts.
- Control power terminal block.
- Ground lug per NEC.
- Class J Fuse mounting only (Class J Fuses not included).
- Key to Test switch 120 volts.
- Mechanically interlocked auxiliary contact for hydraulic elevators with automatic recall (5 A, 120 Vac rated) 1NO, 1NC.

Optional Features

- Control power transformer with fuses and blocks.
- Fire safety interface relay.
- Pilot light — ON.
- Isolated neutral lug (oversized 200% rated neutral option available where required by excessive non-linear loads).
- Fire Alarm Voltage Monitoring Relay (to monitor Shunt Trip voltage).
- NEMA 3R, 4 and 12 enclosures available through 200 amperes.
- Phase failure and undervoltage relay available, consult factory.
- For added protection, use Eaton fuse covers to improve maintenance personnel protection, through 200 amperes (OSHA 1910.333, Paragraph C).

Standards and Certifications

- UL 98 Enclosed and Deadfront Switch Guide 96NK3917, File No. E182262.
- NEMA 1, UL 50, listed enclosure.
- cUL® per Canadian Standards C22.2, No. 0-M91-CAN/CSAT C22.2, No. 4-M89 Enclosed Switch.

Product Specifications

Product Specifications

Table 8-24. Safety Switch Selection Guide

Type	Fuse Type	Fuse Class	Ampere Rating	Number of Poles	Enclosure Types							
					NEMA 1	NEMA 3R	NEMA 12	NEMA 4 Painted Steel	NEMA 4X Stainless Steel	NEMA 4X Non-Metallic	NEMA 7/9	
General-Duty	Fusible	Plug	—	30	1 and 2	YES	YES	—	—	—	—	—
		Cartridge	H	30 – 600	2 and 3	YES	YES	—	—	—	—	—
	Non-Fusible	—	—	30 – 600	2 and 3	YES	YES	—	—	—	—	—
Heavy-Duty	Fusible	Cartridge	H L	30 – 600 800 – 1200	2, 3 and 4	YES Up to 1200 A	YES Up to 1200 A	YES ① Up to 1200 A	YES 400 – 800 A	YES Up to 1200 A	YES Up to 200 A	YES ② Up to 200 A
	Non-Fusible	—	—	30 – 1200	2, 3 and 4	YES	YES	YES ① Up to 1200 A	YES 400 – 800 A	YES Up to 1200 A	YES Up to 200 A	YES Up to 200 A
6-Pole Motor Circuit	Fusible	Cartridge	H	30 – 200	6	—	YES	YES ①	—	YES	—	—
	Non-Fusible	—	—	30 – 200	6	—	YES	YES ①	—	YES	—	—
Double Throw	Fusible	Cartridge	H T (600 V) T (240 V)	30 – 200 400 600	2 and 3	YES Up to 600 A	YES Up to 400 A	—	—	—	—	—
	Non-Fusible	—	—	30 – 800	2, 3, 4 and 6	YES	YES	YES Up to 400 A	—	YES Up to 400 A	—	—
Rotary Switches	Non-Fusible	—	—	16 – 125	3, 4	YES	YES ①	YES ①	—	YES	YES	—

① NEMA Type 12 enclosures (30 – 800 amperes) can be field modified to meet NEMA 3R rainproof requirements when a factory provided drain screw is removed.

② Class J fuse clips provided.

Table 8-25. EnviroLine Safety Switch Selection Guide

EnviroLine	Fuse Type	Fuse Class	Ampere Rating	Number of Poles	Enclosure Types						
					NEMA 1	NEMA 3R	NEMA 12	NEMA 4 Painted Steel	NEMA 4X Stainless Steel	NEMA 4X Non-Metallic	
Stainless Enclosure with Stainless Mechanism	Fusible	Cartridge	H	30 – 400	2 and 3	—	—	—	—	YES	—
	Non-Fusible	—	—	30 – 400	3	—	—	—	—	YES	—
Viewing Window Upper or Lower ①②③	Fusible	Cartridge	H L	30 – 600 800	3	—	—	YES ④	YES	YES	—
	Non-Fusible	—	—	30 – 800	3	—	—	YES ④	YES	YES	—
Receptacle	Fusible	Cartridge	H	30 – 100	3	—	—	YES	—	YES	—
	Non-Fusible	—	—	60	3	—	—	YES	—	YES	—
Non-Metallic	Fusible	Cartridge	H	30 – 200	3	—	—	—	—	—	YES
	Non-Fusible	—	—	30 – 200	3	—	—	—	—	—	YES

① 800 ampere upper window switches are not UL listed.

② Lower Window switches are available through 600 amperes.

③ 30 – 100 ampere switches provided with full view window.

④ NEMA Type 12 enclosures (30 – 800 amperes) can be field modified to meet NEMA 3R rainproof requirements when a factory provided drain screw is removed.

General-Duty

Table 8-35. Short Circuit Ratings Using Class "R", "J" or "T" Fusing where Applicable

Ampere Rating	Voltage Ratings	
	Type 1	Type 3R
30	100k at 240	100k at 240
60	100k at 240	100k at 240
100	100k at 240	100k at 240
200	100k at 240	100k at 240
400	100k at 250	100k at 250
600	100k at 250	100k at 250

Note: Class "H" fuse clips supplied as standard for 30 – 600 amperes. Rated at 10,000 rms symmetrical when using Class "H" fuses.

Heavy-Duty

Table 8-36. Short Circuit Ratings Using Class "R", "J" or "T" Fusing where Applicable

Ampere Rating	Voltage Ratings			
	Type 1	Type 3R	Type 12	Type 4 and 4X
30	200k at 600	200k at 600	200k at 600	200k at 600
60	200k at 600	200k at 600	200k at 600	200k at 600
100	200k at 480 100k at 600	200k at 480 100k at 600	200k at 600	200k at 600
200	200k at 600	200k at 600	200k at 600	200k at 600
400	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600
600	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600
800	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600	200k at 480 100k at 600
1200	200k at 600	200k at 600	200k at 600	200k at 600

Note: Class "H" fuse clips supplied as standard for 30 – 600 amperes. Class "L" fuse clips supplied as standard for 800 – 1200 amperes. Rated at 10,000 rms symmetrical when using Class "H" fuses.

Double Throw

Table 8-37. Short Circuit Ratings Using Class "R", "J" or "T" Fusing where Applicable

Ampere Rating	Voltage Ratings			
	Type 1	Type 3R	Type 12	Type 4 and 4X
30	100k at 600	100k at 600	100k at 600	100k at 600
60	100k at 600	100k at 600	100k at 600	100k at 600
100	100k at 600	100k at 600	100k at 600	100k at 600
200	100k at 600	100k at 600	100k at 600	100k at 600
400	100k at 600	100k at 600	100k at 600	100k at 600
600	100k at 600	100k at 600	100k at 600	100k at 600
800	100k at 600	100k at 600	—	—

Note: Class "H" fuse clips supplied as standard for 30 – 600 amperes except Class "T" for 400 amperes at 600 volts and 600 amperes at 240 volts. Rated at 10,000 rms symmetrical when using Class "H" fuses.

Note: Table 8-37 is not applicable to the Compact Design shown on Page 8-32. The Compact Design is suitable for use on a circuit capable of delivering not more than 10,000 rms symmetrical amperes.

Note: Class "R" fuse adapter kits are shown on Page 8-6. Individual adapter kits are applicable as shown on Page 8-6 and yield the short circuit ratings per the tables above when Class "R" fuses are installed. When installed, Class "R" fuse adapter kits reject all fuses except Class "R."

Note: Class "J" fuse provisions can be obtained on most 60 – 400 ampere safety switches by moving the fuse base to a new position as instructed by the device publication label. Class "J" fuse adapter kits, where needed, are shown on Page 8-5 and yield the short circuit ratings per the tables above when Class "J" fuses are installed. Class "J" fuse provisions must be factory installed on 30 ampere heavy-duty switches. Catalog numbers are shown in Table 8-15 on Page 8-10. Class "J" fusing is not applicable on 30 – 200 ampere general-duty switches, 30 – 100 ampere double throw switches, 600 ampere double throw switches, and any switch higher than 600 amperes.

Note: Class "T" fuse adapter kits are shown on Page 8-6. Individual adapter kits are applicable to 200 – 800 ampere switches as shown on Page 8-6 and yield the short circuit ratings per the tables to the left when Class "T" fuses are installed. On 1200 ampere switches, Class "T" fuse provisions can be obtained by moving the fuse base to a new position as instructed by the device publication label.

Non-Fusible Switches


The UL listed short circuit ratings for Cutler-Hammer Non-Fusible switches by Eaton Corporation are based on the switches being properly protected by overcurrent protective devices. For applications that require a UL listed short circuit rating of 10,000 rms symmetrical amperes or less, a Cutler-Hammer Non-Fusible switch must be properly protected by any overcurrent protective device rated no greater than the ampere rating of the switch. For applications that require a UL listed short circuit rating of greater than 10,000 rms symmetrical amperes, a Cutler-Hammer Non-Fusible switch must be properly protected by the appropriate class and size fusing noted on the switch publication (located on the inside cover). Otherwise, this Non-Fusible switch must be replaced with a Cutler-Hammer Fusible switch that utilizes the appropriate fusing required. Molded case circuit breaker protection of Non-Fusible Cutler-Hammer switches for applications that require a short circuit rating of greater than 10,000 rms symmetrical amperes has not been evaluated. Refer to the reference tables for typical Cutler-Hammer fusible switch UL listed short circuit ratings.

Note: Safety switch short circuit ratings are applicable to ac only.

Note: Safety switch I^2t and I_p values are identical to UL maximum acceptable I^2t and I_p values for the corresponding class fuse.

Product Selection


Table 8-38. Safety Switch Catalog Numbering System

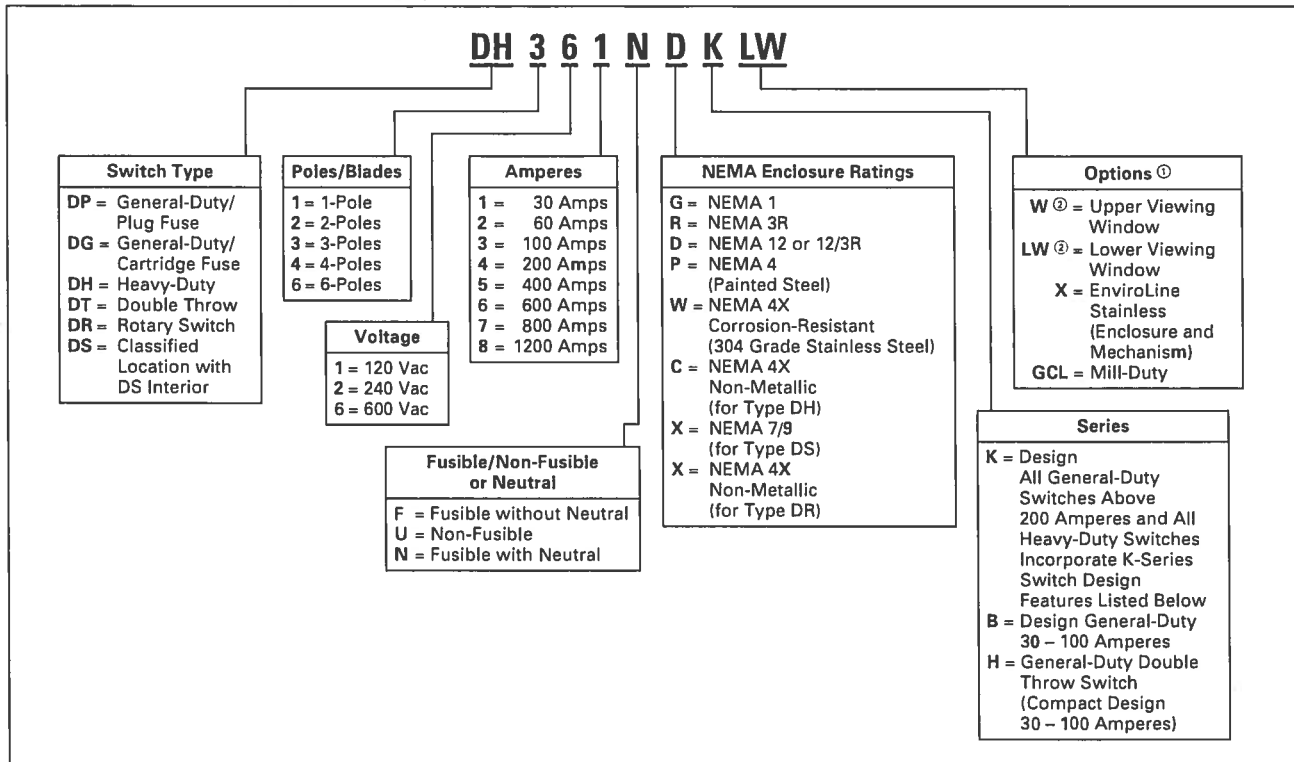

- ① See Pages 8-8 through 8-11 for additional Flex Center options.
- ② Effective August 2003, 30 – 100 ampere window switches are replaced by a full view window which allows blade position verification and blown fuse indication. See Page 8-37 for catalog numbers.

Note: This table is intended for use in breaking down existing catalog numbers. It is not intended for building new catalog numbers.

Table 8-39. Elevator Control Switch Catalog Numbering System

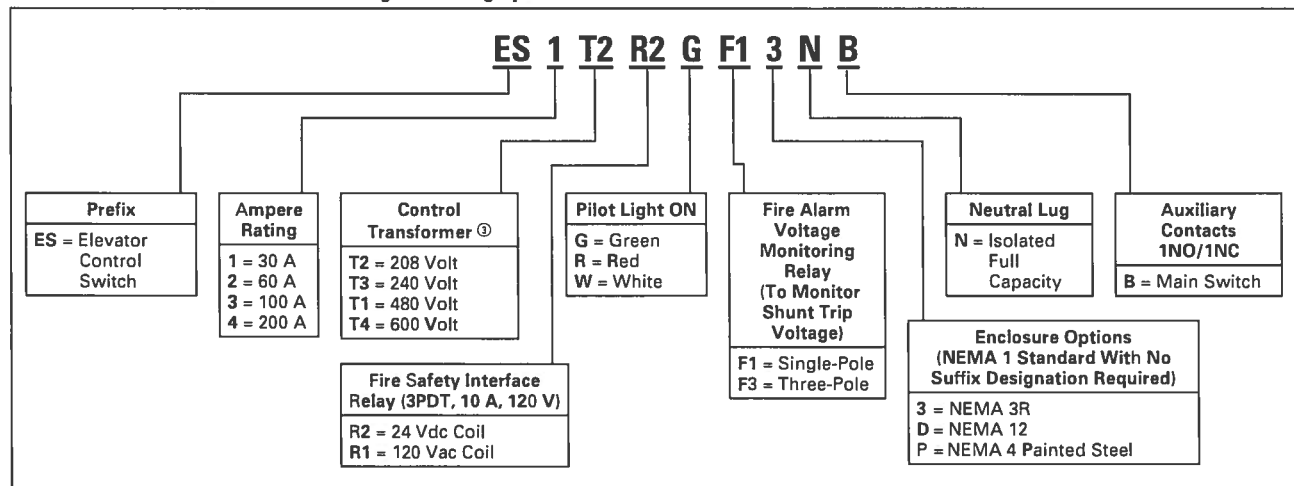


① 100 VA with Primary and Secondary fusing (120 Volt Secondary).

Catalog Number Example: ES3T1R1GF3


- 100 Ampere S.T. Switch 480V-3P — ES3.
- 480 – 120 Volt CPT — T1.
- 120 Vac Coil Fire Safety Interface Relay — R1.
- Pilot Light — ON (Green) — G.
- Fire Alarm Voltage Monitoring Relay (Three-Pole) — F3.

All General-Duty Switches Above 100 Amperes and All Heavy-Duty Switches Incorporate These K-Series Switch Design Features




Visible Double Break Rotary Blade Mechanism

Two points of contact provide a positive open and close, easier operation, and also help prevent contact burning for longer contact life.




Clearly Visible Handle

The position (ON or OFF) can be clearly seen from a distance and the length provides for easy operation.




Interlocking Mechanism

Door cannot be opened when the handle is in the ON position. Front and side operable defeater mechanism provides for user access when necessary on single throw switches.




Clear Line Shield

Protects against accidental contact with energized parts. Probe holes enable the user to test if the line side is energized without removing the shield. Not typically provided on general-duty switches, but available as a field kit or factory installed.




Triple Padlocking Capability

Personnel safety feature since the large hasp can accommodate up to three 3/8-inch (9.5 mm) shank locks.




Tangential Knockouts

An ample number are provided on the top, bottom and sides of both NEMA Types 1 and 3R enclosures through 200 amperes.




Built-in Fuse Pullers (NEMA 12 and 4X 30 – 200 Amperes Only)

Provide easy removal of fuses.



Additional Locking Capability

Cabinet door can be further padlocked at the top and bottom as applicable.



Bolt-on Hub Kits

For switches in a NEMA Type 3R, 30 – 200 A. Use a Myers type hub for all others

EATON

Options and Accessories

Table 8-1. Safety Switches — Accessories

Description	Catalog Number	Price U.S. \$
Neutral Kits/Ground Kits 30 A DG 60 – 100 A DG 200 A DG, DH (NEMA 1, 3R Enclosures) 30 – 60 A DH 100 A DH 200 A DH (NEMA 4X, 12 Enclosures) 400 A DG, DH 600 A DG, DH 400 – 600 A Fusible DT, 800 – 1200 A DH 30 – 100 A DT 200 A DT 400 A Non-Fusible DT 600 A Non-Fusible DT	DG030NB DG100NB DG200NK DH030NK DH100NK DH200NK DS400NK DS600NK DS800NK DT100NK DT200NK DT400NK DT600NK	
Ground Lug Kits 30 – 100 A DG 30 – 100 A DH, DT ① 200 A DG, DH, DT 400 – 600 A DG, 400 – 1200 A DH, 400 – 800 A DT	DG030GB DS100GK DS200GK DS468GK	
Switching Neutral Bonding Kits ② 30 – 100 A DT, 3P, 4P Non-Fusible 200 A DT, 3P, 4P Non-Fusible 400 A DT, 3P, 4P Non-Fusible 600 A DT, 3P, 4P Non-Fusible 800 A DT, 3P, 4P Non-Fusible	DT100BK DT200BK DT400BK DT600BK DT800BK	
Control Pole Kit (for 2P, 3P Switches) 400 – 600 A DG, 30 – 1200 A DH, 30 – 800 A DT	DS16CP	
Auxiliary Contact Kits All Switches (except 30 – 100 A DG) 1NO/1NC All Switches (except 30 – 100 A DG) 2NO/2NC NEMA 7/9 Switches (30 – 100 A) 1NO/1NC NEMA 7/9 Switches (30 – 100 A) 2NO/2NC NEMA 7/9 Switches (200 A) 1NO/1NC NEMA 7/9 Switches (200 A) 2NO/2NC	DS200EK1 DS200EK2 178C265G05 178C265G06 178C619G01 178C619G02	
Copper Lug Kits 30 A DH, DT ② 60 A DH, DT ② 100 A DH, DT ② 200 A DH ② 400 A DH (NEMA 4, 4X, 12 Enclosures) ③ 600 – 800 A DH (NEMA 4, 4X, 12 Enclosures) ③	DS16CL DS16CL DS36CL DS46CL DS56CL DS66CL	
Crimp Lug Pad Kit (NEMA 4, 4X, 12 Enclosures) 400 – 600 A DH ② 800 A DH ② 400 – 800 A Neutral DH ④	DS56CK DS76CK DS800CNK	
Fuse Puller Kits 30 – 60 A DH ② 30 – 60 A DH ③ 100 A DH ② 200 A DH ②	DS30FP DS60FP DS100FP DS200FP	
"J" Fuse Adapter Kits 60 A 240 Volt DH ② 60 A DT and Receptacle Switches ② 400 A 600 Volt DT ⑤ 600 A 240 – 600 Volt DH, 600 A DG ⑥	DS22JK DS26JK DT400JK DS600JK	

① Ground bar kit is not listed on device publications.

② Order one kit for 3 poles.


③ Order one kit for each pole.

④ Order one kit per switch.

⑤ Receptacle switches.

⑥ Order one kit for 6 poles.


Note: Accessories are not applicable to NEMA 7/9 switches unless indicated otherwise.




DH030NK




DS200GK



DT100BK




DS16CP




DS200EK1



DS36CL



DS56CK



DS60FP



DS22JK

Note: A factory installed ground lug is supplied on all NEMA 4, 4X and 12 safety switches, as well as all 400 ampere and higher NEMA 1 and 3R safety switches. A factory installed ground lug is also supplied on all Heavy-Duty NEMA 1 and 3R 30 – 200 ampere switches that do NOT have a factory installed neutral.

Discount Symbol 22CD

2-Position Red Push-Pull and Push-Pull/Twist Release Devices, Non-Illuminated
Note: A jumbo or large legend plate is recommended, if space allows.



2-Position Push-Pull
Cat. No. 800T-FX6D4



2-Position Metal Push-Pull
Cat. No. 800T-FXLE6D4S




2-Position Push-Pull / Twist
Cat. No. 800T-FXT6D4



2-Position Push-Pull / Twist
Cat. No. 800H-FRXT6D4

Contact Type	Operator Position		Type 4/13		Type 4/4X/13
	Out	In	Push-Pull — 40 mm	Push-Pull — 63 mm Metal	Push-Pull/Twist Release
N.C.L.B.*	X	O	800T-FX6D4	800T-FXLE6D4	800H-FRXT6D4
N.O. - N.C.L.B.*	O	X	800T-FX6A1	800T-FXLE6A1	800H-FRXT6A1
N.C.L.B. - N.C.L.B.*	X	O	800T-FX6A5	800T-FXLE6A5	800H-FRXT6A5
S.M.C.B.*‡	X	O	800TC-FX6D4S	800TC-FXLE6D4S	800HC-FRXT6D4S
N.O. - S.M.C.B.*‡	O	X	800TC-FX6A1S	800TC-FXLE6A1S	800HC-FRXT6A1S
S.M.C.B. - S.M.C.B.*‡	X	O	800TC-FX6A5S	800TC-FXLE6A5S	800HC-FRXT6A5S

Note: X = Closed/O = Open Note: These caps are only available in plastic.
Note: Emergency stop push buttons are compliant with EN ISO 13850 and EN/IEC 60947-5-5 Standards when using N.C.L.B. contact blocks.
‡ The Self Monitoring Contact Block (S.M.C.B.) is composed of a N.C.L.B. contact wired in series with a N.O. monitoring contact. The N.O. monitoring contact automatically closes when the S.M.C.B. is properly installed onto the E-stop operator. If the S.M.C.B. is separated from the E-stop operator, the N.O. monitoring contact will automatically open.



800 T - FX 1 A1
a b c d e

Protection Rating	
Code	Description
T	Metal, Type 4/13
4X	Plastic, Type 4/4X/13

Finger-Safe Guards	
Code	Description
Blank	No guards
G	Guards on terminals

Head Type†		
800T Type 4/13	Description	800H Type 4/4X/13
Code		Code
FX	Mushroom head (push-pull)	
FXC	90 mm anodized aluminum head (push-pull)	
FXJ	Jumbo mushroom head (push-pull)	
FXJE	Jumbo mushroom head (push-pull) with "E-Stop"	
FXL	63 mm anodized aluminum head (push-pull)	
FXLE	63 mm anodized aluminum head (push-pull) with "E-Stop"	
FXT	Push-pull/twist-to-release	FRXT
FXTJ	Jumbo head push-pull with twist-to-release	FRXTJ


Color Cap	
Code	Color
Blank	No cap§
1	Green
2	Black
3	Orange
4	Grey
5	White
6	Red
7	Blue
8	Yellow

Contact Block(s)			
Code	Operator Position		Description
	Out	In	
Blank	—	—	No contacts on operator
Standard			
D1	O	X	1 N.O.
D2	X	O	1 N.C.
D4	X	O	1 N.C.L.B.
A	O	X	1 N.O. - 1 N.C.
A	X	O	1 N.O. - 1 N.C.L.B.
A5	X	O	2 N.C.L.B.

Contact Block(s)			
Code	Operator Position		Description
	Out	In	
Blank	—	—	No contacts
PenTUFF (Low Voltage)			
D1V	O	X	1 N.O.
D2V	X	O	1 N.C.
D4V	X	O	1 N.C.L.B.
AV	O	X	1 N.O. - 1 N.C.
Class 1, Div. 2/Zone 2			
Logic Reed			
D1R	O	X	1 N.O.
D2R	X	O	1 N.C.
AR	O	X	1 N.O. - 1 N.C.
Sealed Switch			
D1P	O	X	1 N.O.
D2P	X	O	1 N.C.
AP	O	X	1 N.O.
AP	X	O	1 N.C.
Stackable Sealed Switch			
D1X	O	X	1 N.O.
D2X	X	O	1 N.C.
AX	O	X	1 N.O. - 1 N.C.
AX	X	O	1 N.O. - 1 N.C.

Note: X = Closed/O = Open
* Normally closed late break contact. When button is pushed from the OUT to IN position, the mechanical detent action of the operator occurs before electrical contacts change state. When the button is pulled from the IN in the OUT position, the electrical contacts change state before the mechanical detent occurs.
‡ Devices with N.C.L.B. contacts meet EN ISO 13850 and IEC 60947-5-5 standards for emergency stop applications.
§ Not valid with head Type J or JT.

Custom-Built Stations



Description

The table on page 10-5 lists the most commonly used Bulletin 800T/800H push button stations. Stations not listed in this table may be ordered as custom-built stations.

Cat. No.

The cat. no. used to identify custom-built Bulletin 800T push button stations will be cat. no. listed for enclosure only. The letter Z will be substituted for the letter W and a station serial no. will be added.

Ordering Information

The following information is required when ordering custom-built push button stations.

1. Cat. no. of enclosure.
2. Cat. no. of control units.
3. Legend plate cat. no. and/or marking for each unit.
4. Specify vertical/horizontal mounting.
5. Specify desired operator mounting sequence. Inclusion of a sketch is recommended. If no information is given, standard configuration will be used.

Enclosures

	Surface Mount*		Flush Mount	Pendant Type	
	Die Cast† (Type 4/13)	Sheet Metal (Type 13)	Die Cast Face Plate (Type 4/13)	One Hole in Bottom (Type 13)	Openings in Cover (Type 13)
	Cat. No. 800T-2TZ	Cat. No. 800T-6TJZ	Cat. No. 800T-2ZT	Cat. No. 800T-2PZ	Cat. No. 800T-2PY
No. of Operator Openings	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
→ 1	800T-1TZ*		800T-1ZT		
2	800T-2TZ*		800T-2ZT†	800T-2PZ	800T-2PY
3	800T-3TZ*		800T-3ZT	800T-3PZ	800T-3PY
4	800T-4TZ*		800T-4ZT	800T-4PZ	800T-4PY
5				800T-5PZ	800T-5PY
6‡	800T-6TZ*		800T-6ZT	800T-6PZ	800T-6PY
6§	800T-6THZ*	800T-6TJZ	800T-6ZTH†		
7				800T-7PZ	800T-7PY
8				800T-8PZ	800T-8PY
9	800T-9TZ	800T-9TJZ	800T-9ZT	800T-9PZ	800T-9PY
10				800T-10PZ	800T-10PY
12	800T-12TZ	800T-12TJZ	800T-12ZT		
16	800T-16TZ	800T-16TJZ	800T-16ZT		
20		800T-20TJZ			
25		800T-25TJZ			







Note: Specialty enclosures available. Please refer to KB Q89259778.
 Note: Enclosure and conduit dimensions are detailed on page 10-61.
 * Bottom conduit entry. Grounding provision provided.
 † Enclosure depth will accommodate one shallow and one mini-contact block stacked.
 ‡ Add suffix Y to the cat. no. for yellow painted enclosure. Example: Cat. No. 800T-1TZY.
 ‡ One vertical row.
 § Two vertical rows of three holes.

10

10-36

10-42

Locking Attachments, Continued

	Description	Cat. No.																																
 <p>Cat. No. 800H-N140 (Padlock not included)</p>	<p>Bul. 800T/H Padlocking Cover Guards against unauthorized operation. For non-illuminated push buttons, 2-position push-pull or twist-release units, and standard knob selector switches. When applying Cat. No. 800H-N140 on 2-position maintained push-pull units, cover will lock only when the button is in depressed position. Padlocking cover includes blank legend plate for customer marking. Note: A pre-marked legend plate is available. The words OPEN COVER TO OPERATE are on the front and PULL-TO-START-PUSH-TO-STOP are on the rear. To order legend plate only, specify Cat. No. 800H-W174L.</p>	<p>800H-N140</p>																																
 <p>Cat. No. 800T-NX446 (Padlock not included)</p>	<p>Bul. 800T 2- and 3-Position Non-Illuminated Selector Switch Padlocking Attachment — Standard Knob Padlocking guard for 2- and 3-position selector switches with standard knob operators only. Locks selector switch in any maintained position.*</p>	<p>800T-NX446</p>																																
 <p>Cat. No. 800H-N141R (Padlock not included)</p>	<p>Bul. 800H 2- and 3-Position Selector Switch with Padlocking Guards Padlocking guard for 2- and 3-position selector switches with standard knob operators only.</p>	<table border="1"> <thead> <tr> <th>Description</th> <th>Position</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td rowspan="4"></td> <td>Left</td> <td>800H-N141L</td> </tr> <tr> <td>Center</td> <td>800H-N141C</td> </tr> <tr> <td>Right</td> <td>800H-N141R</td> </tr> <tr> <td>All</td> <td>800H-N141A</td> </tr> </tbody> </table>	Description	Position	Cat. No.		Left	800H-N141L	Center	800H-N141C	Right	800H-N141R	All	800H-N141A																				
Description	Position	Cat. No.																																
	Left	800H-N141L																																
	Center	800H-N141C																																
	Right	800H-N141R																																
	All	800H-N141A																																
 <p>Cat. No. 800T-NX446A (Padlock not included)</p>	<p>Bul. 800T 4-Position Selector Switch Attachment — Standard Knob Kit includes selector switch and guard (padlock not included). Padlocking guard for 4-position selector switches with standard knob operators only. Locks selector switch in any maintained position.*</p>	<p>800T-NX446A</p>																																
 <p>Cat. No. 800H-N316J (Padlock not included)</p>	<p>Bul. 800T/H Non-Illuminated Selector Switch Padlocking Attachment 2-, 3-, and 4-position selector switch padlocking attachments. Can be used to lock operators in a desired position. For 3-position selector switches, this device can also be used to lock out a left or right position as shown in the photo to the left.</p>	<table border="1"> <thead> <tr> <th>Description</th> <th>Position</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td rowspan="3"></td> <td colspan="2">For 2- and 3-Position Selector Switches</td> </tr> <tr> <td>Left</td> <td>800T-N316L</td> </tr> <tr> <td>Center</td> <td>800T-N316C</td> </tr> <tr> <td rowspan="2"></td> <td>Right</td> <td>800T-N316R</td> </tr> <tr> <td>Window Center through Right - Prevent Left Operation</td> <td>800T-N316J</td> </tr> <tr> <td>Window Center through Left - Prevent Right Operation</td> <td>800T-N316K</td> </tr> <tr> <td rowspan="7"></td> <td colspan="2">For 4-Position Selector Switches</td> </tr> <tr> <td>Left (Pos. 1)</td> <td>800T-N317L</td> </tr> <tr> <td>Center Left (Pos. 2)</td> <td>800T-N317CL</td> </tr> <tr> <td>Center Right (Pos. 3)</td> <td>800T-N317CR</td> </tr> <tr> <td>Right (Pos. 4)</td> <td>800T-N317R</td> </tr> <tr> <td>Window Center through Right - Prevent Left Operation</td> <td>800T-N317J</td> </tr> <tr> <td>Window Center through Left - Prevent Right Operation</td> <td>800T-N317K</td> </tr> </tbody> </table>	Description	Position	Cat. No.		For 2- and 3-Position Selector Switches		Left	800T-N316L	Center	800T-N316C		Right	800T-N316R	Window Center through Right - Prevent Left Operation	800T-N316J	Window Center through Left - Prevent Right Operation	800T-N316K		For 4-Position Selector Switches		Left (Pos. 1)	800T-N317L	Center Left (Pos. 2)	800T-N317CL	Center Right (Pos. 3)	800T-N317CR	Right (Pos. 4)	800T-N317R	Window Center through Right - Prevent Left Operation	800T-N317J	Window Center through Left - Prevent Right Operation	800T-N317K
Description	Position	Cat. No.																																
	For 2- and 3-Position Selector Switches																																	
	Left	800T-N316L																																
	Center	800T-N316C																																
	Right	800T-N316R																																
	Window Center through Right - Prevent Left Operation	800T-N316J																																
Window Center through Left - Prevent Right Operation	800T-N316K																																	
	For 4-Position Selector Switches																																	
	Left (Pos. 1)	800T-N317L																																
	Center Left (Pos. 2)	800T-N317CL																																
	Center Right (Pos. 3)	800T-N317CR																																
	Right (Pos. 4)	800T-N317R																																
	Window Center through Right - Prevent Left Operation	800T-N317J																																
	Window Center through Left - Prevent Right Operation	800T-N317K																																
 <p>Cat. No. 800H-N4162L (Padlock not included)</p>	<p>Bul. 800T/H Illuminated Selector Switch Padlocking Attachment 2- and 3-position selector switch padlocking attachments for illuminated selector switches. Stainless steel material.</p>	<table border="1"> <thead> <tr> <th>Description</th> <th>Position</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td rowspan="2"></td> <td colspan="2">For 2-Position Selector Switches</td> </tr> <tr> <td>Left</td> <td>800T-N4162L</td> </tr> <tr> <td></td> <td>Right</td> <td>800T-N4162R</td> </tr> <tr> <td rowspan="7"></td> <td colspan="2">For 3-Position Selector Switches</td> </tr> <tr> <td>Left</td> <td>800T-N4163L</td> </tr> <tr> <td>Center</td> <td>800T-N4163C</td> </tr> <tr> <td>Right</td> <td>800T-N4163R</td> </tr> <tr> <td>Window Center through Right - Prevent Left Operation</td> <td>800T-N4163J</td> </tr> <tr> <td>Window Center through Left - Prevent Right Operation</td> <td>800T-N4163K</td> </tr> </tbody> </table>	Description	Position	Cat. No.		For 2-Position Selector Switches		Left	800T-N4162L		Right	800T-N4162R		For 3-Position Selector Switches		Left	800T-N4163L	Center	800T-N4163C	Right	800T-N4163R	Window Center through Right - Prevent Left Operation	800T-N4163J	Window Center through Left - Prevent Right Operation	800T-N4163K								
Description	Position	Cat. No.																																
	For 2-Position Selector Switches																																	
	Left	800T-N4162L																																
	Right	800T-N4162R																																
	For 3-Position Selector Switches																																	
	Left	800T-N4163L																																
	Center	800T-N4163C																																
	Right	800T-N4163R																																
	Window Center through Right - Prevent Left Operation	800T-N4163J																																
	Window Center through Left - Prevent Right Operation	800T-N4163K																																

* Diameter of hasp is 11/32 in. (8.73 mm)