



WEAVER CONSTRUCTION MANAGEMENT, INC.
3679 S. Huron St., Suite 404
Englewood, CO 80110
Phone: (303) 789-4111 FAX: (303) 789-4310

SUBMITTAL TRANSMITAL

October 17, 2011

WGC Submittal No: 05500-001-A

PROJECT: Harold Thompson Regional WRF
Birdsall Rd.
Fountain, CO 80817
Job No. 2908

ENGINEER: GMS, Inc.
611 No. Weber St., #300
Colorado Springs, CO 80903
719-475-2935 Roger Sams

OWNER: Lower Fountain Metropolitan
Sewage Disposal District
901 S. Santa Fe Ave.
Fountain, CO 80817
719-382-5303 James Heckman

CONTRACTOR: Rocky Mountain Railings
11839 E. 51st Ave.
Denver, CO 80239
303-432-0003 Scot Hooper

SUBJECT: Resubmittal of Handrail includes the following:

- WCM Additional Submittal Review Comments Page
- Aluminum Railing Design Calculations
- Hilti HIT-RE 500 Epoxy Adhesive Anchoring System
- Load Testing of Aluminum Hand Rail by TABCO
- System layout and sectional drawings D-1, D-2, FPI, 1, 2, 3, 4.

SPEC SECTION: 05500 - Metal Fabrications

PREVIOUS SUBMISSION DATES: 7/28/11

DEVIATIONS FROM SPEC: X YES NO

CONTRACTOR'S STAMP: This submittal has been reviewed by Weaver Construction Management and approved with respect to the means, methods, techniques, & safety precautions & programs incidental thereto. Weaver General Construction also warrants that this submittal complies with contracted documents and comprises no deviations thereto:

Contractor's Stamp:	Engineer's Stamp:
Date: 10/17/11 Reviewed by: H.C. Myers <input checked="" type="checkbox"/> Reviewed Without Comments <input type="checkbox"/> Reviewed With Comments	
ENGINEER'S COMMENTS:	



Project: HDTWRF Project

Location: Fountain, CO

Supplier: Rocky Mountain Railings

Date: 10/13/11

Additional Submittal Review Comments 05500-1.A

1. The attached submittal document from Rocky Mountain Railings is a deviation from the specification which we are submitting as a substitute.
2. Please note, a sample of the handrail connections has been "given" to GMS for review.
3. Calculations provided are for a system installed in Texas.
4. Aluminum post, rails and components are Aluminum 6105-T5. Specs identify Aluminum 6061-T5
5. WCM to verify rail dimensions based on actual construction dimensions.
6. Handrail for alternating tread stair by others.
7. GMS – verify the use of detail 80KD-7A is acceptable at the top of the stairs on the west side of the chain opening.

ATEC Associates, Inc.



5150 East 65th Street
Indianapolis, Indiana 46220 4871
317-843-1990
Telex 232 0055 ASAS

Corporate Office:
Indianapolis, IN

Offices:
Atlanta, GA
Baltimore, MD
Birmingham, AL
Calumet City, IL
Chicago, IL
Cincinnati, OH
Dallas, TX
Dayton, OH
Denver, CO
Destin, FL
Gary, IN
Gaithersburg, MD
Harrisburg, PA
Huntsville, AL
Irvington, KY
Lafayette, LA
Newman, NC
Raleigh, NC
Salisbury, MD
Savannah, GA
Washington, DC

Affiliates:
Alexandria, VA
Norfolk, VA

February 10, 1986

Tuttle Aluminum and Bronze Company
120 Shadow Lawn Drive
Noblesville, Indiana 46060

ATTN: Mr. Doug Waugh

RE: Load Testing of Aluminum Hand
Rail Structure - TABCO 2500
Tuttle Aluminum and Bronze Company
Noblesville, Indiana
ATEC Job No. 21-62016

Gentlemen:

Submitted herewith are results of load testing of an aluminum hand rail structure at the referenced site. This testing was performed on February 7, 1986 on the railing configuration noted below.

Three independent loads were applied to the rail structure. (See attached sketch of the rail structure) The loads were applied horizontally at a midspan, horizontally at a post and vertically at a midspan. The load was applied by a hydraulic jack attached to a fork lift. A calibrated proving ring was attached to the rail at loading locations for measurement of load. The loads were then applied by jacking the pump against the proving ring until the desired load was reached.

Deflection readings were made at maximum loading (200#) and then again after release of load to determine any permanent deflection. This was measured as deflection of the top rail horizontally (for horizontal loading) and the top rail vertically (for vertical loading).

The following is the construction description of the TABCO 2500 - Mechanical Connections railing system:

February 10, 1986
Tuttle Aluminum & Bronze
Page 2

TABCO 2500 CONSTRUCTION

Aluminum rail was constructed of 1-1/2" (Sch 40) aluminum pipe, top, intermediate, and post. All pipe to pipe connections were mechanically attached with fittings and rivets. The posts were welded to 3/8" x 2-1/2" x 6" aluminum base plates and mounted to a concrete floor with two (2) 3/8" x 2-3/4" stainless steel TRUBOLTS.

We appreciate the opportunity to be of service to you on this project. If you have any questions, please give me a call at this office.

Very truly yours;

ATEC ASSOCIATES, INC.


Thomas J. Struewing
Project Engineer

TJS/cas

Load Test of Aluminum Railing
Tuttle Aluminum and Bronze Company
Noblesville, Indiana
ATEC Job No. 21-62016


TABCO 2500 - Mechanical Connections
Deflection Permanent Set *

Horizontal load at
Midspan = 200# 1-9/16" 1/16"
(Fh)

Vertical Load at
Midspan = 200# 0.127" 0.00"
(Fv)

Horizontal Load at
Post = 200# 1-5/16" 0"
(P)

* Deflection after release of load

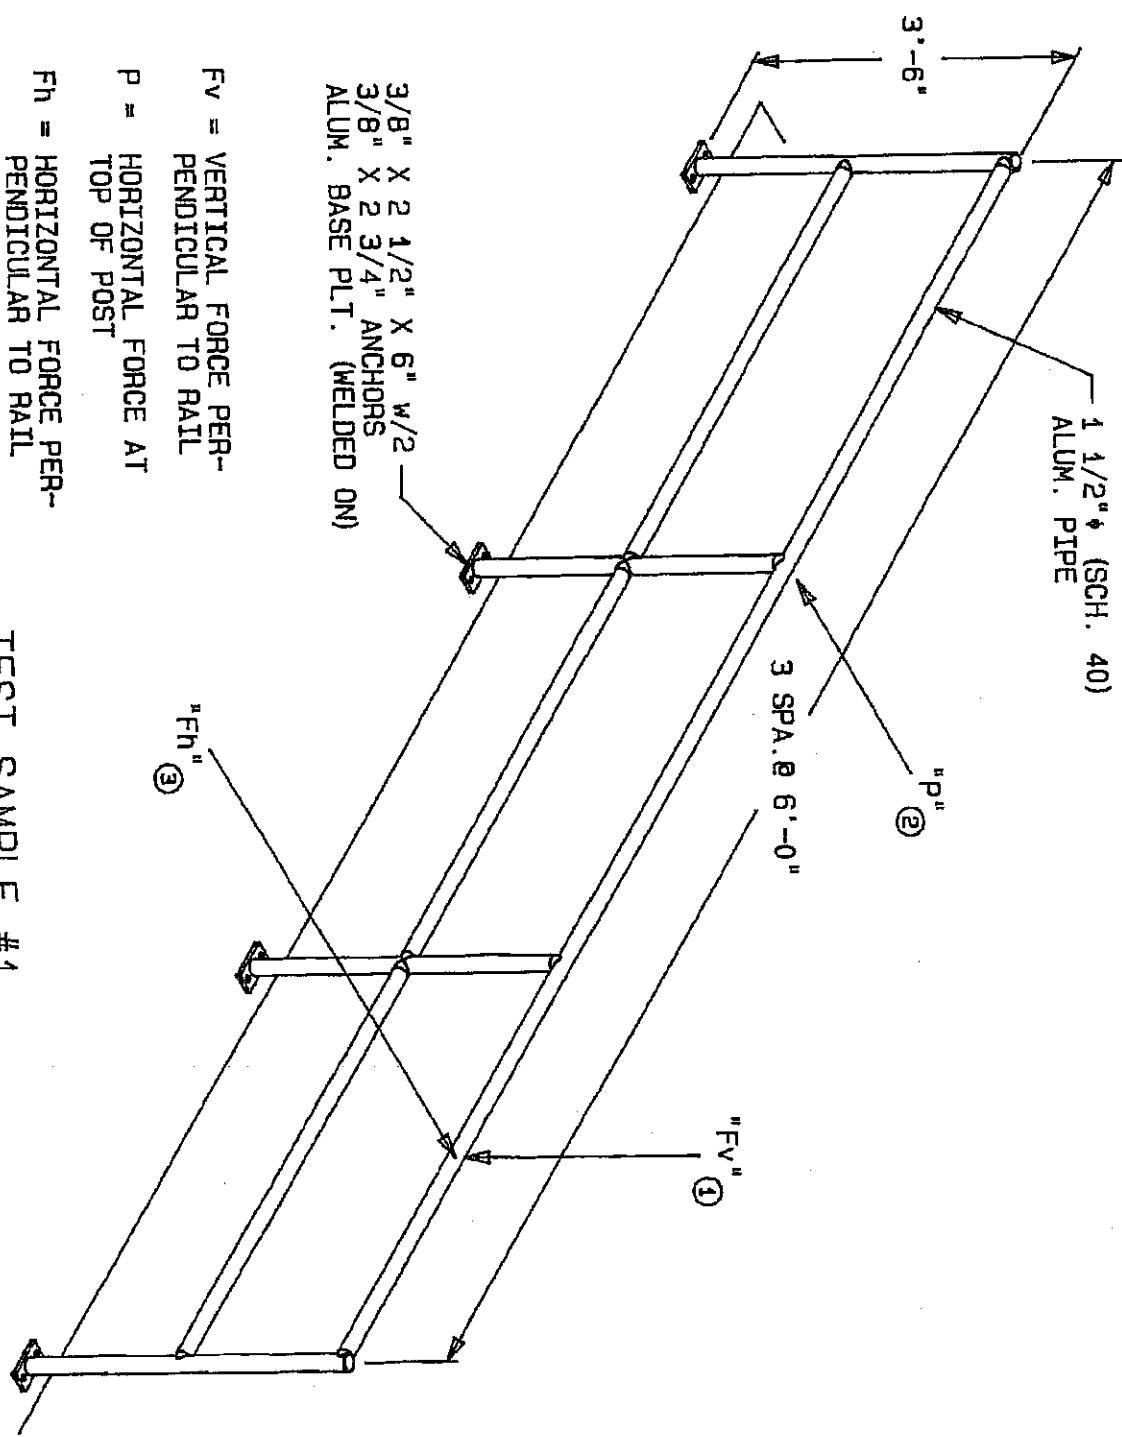



Re: Alloy Temper for Rocky Mountain Railings, Inc. Aluminum Pipe

Subject: Increased Yield Strength and Anodizing

As of 01/01/2007, Rocky Mountain Railings, Inc. has changed the use of alloy 6063-T6, 1-1/2" Sch. 40 pipe to the use of Aluminum Alloy 6105-T5. The reasons for the change is as follows:

- 1). 6105-T5 has an ultimate minimum tensile strength of 38 KSI, and 6063-T6 has 22 KSI (See Alcoa Conformance Chart) This alloy meets or exceeds OSHA and UBC loading requirements.
- 2). Alloy 6105-T5 is also equivalent to alloy 6061-T6 in terms of tensile and yield strength. Alloy 6061-T6 is also a commonly specified alloy due to its superior strength. However the anodizing finish of 6061-T6 does not match Rocky Mountain Railings, Inc. standard clear anodize of our fittings 6105-T5 is a near perfect match in finish, Therefore a more aesthetic appearance.

Although Rocky Mountain Railings, Inc. has endured cost impact for the use of alloy 6105-T5, We have not passed this cost to our customers. We feel that the increased strength of alloy and the appearance of the finish have helped in the submittal process and a feeling of satisfaction, knowing that we are supplying a quality product to our customer.

If you have any questions, Please call at (303)-432-0003



ALCOA

Alcoa Engineered Products

ALLOY 6005/6105

Understanding Extruded Aluminum Alloys

Among Alcoa Engineered Products' structural 6XXX series alloys, 6005 and 6105 are medium strength alloys that are very similar to alloy 6061 except they contain higher amounts of silicon. These alloys are used in designs that require moderate strength, but are generally not recommended for applications where the structure may be susceptible to impact or overloading.

When bending is required, the naturally aged -T1 temper is preferred. However, due to the excess silicon content, properties may increase more rapidly with room temperature aging than typically experienced with 6063 and 6061 alloys. In comparison to 6061, alloys 6005 and 6105 are easier to extrude and are less quench sensitive, allowing them to be used for more complex shapes. Alloys 6005 and 6105, when produced to a -T5 temper, have the same minimum tensile and yield strength as 6061-T6. In comparison to 6063, alloys 6005 and 6105 in -T5 tempers have better machinability and strength properties than 6063-T6.

Alloys 6005 and 6105 can also be welded or brazed using various commercial methods (caution: direct contact with dissimilar materials can cause galvanic corrosion). The heat from welding or brazing can reduce strength in the weld region. Consult the Material Safety Data Sheet (MSDS) for proper safety and handling precautions when using 6005 and 6105 alloys.

These alloys also offer good finishing characteristics and respond well to common anodizing methods such as clear, clear and color dye and hardcoat.

Typical applications for alloys 6005 and 6105 include:

- Automotive connector stock
- Structural members
- Hand rail tubing
- Seamless tubing
- Ladder structures

6005/6105 Temper Designations and Definitions

Standard Temperatures

F	As fabricated. There is no special control over thermal conditions and there are no mechanical property limits.
---	---

T1

Cooled from an elevated temperature shaping process and naturally aged. (See Note A.)

T5

Cooled from an elevated temperature shaping process & artificially aged. (See Note A.)

Alcoa Special Tempers

(For 6005 Alloy only)

T1S14

A maximum formability special temper for product that will be formed within 1 to 2 weeks after shipment. Samples are aged and tested in the -T5 condition to verify heat treat capability.

T5S3

An underaged temper to increase formability at a sacrifice of mechanical properties.

T5S11

Same mechanical property limits as -T5. Stretched 1-3% for stress relief.

*For further details of definitions, see Aluminum Association's Aluminum Standards and Data manual and Tempers for Aluminum and Aluminum Alloy Products.

Note A: Applies to products that are not cold worked after cooling from an elevated temperature shaping process, or in which the effect of cold work in flattening or straightening may not be recognized in mechanical properties.

**Alcoa Special Temper designations are unregistered tempers for reference only and provided for customer use to identify unique processing, material, or end use application characteristics.

Alloy 6005 Chemical Analysis

Liquidus Temperature: 1210°F Solidus Temperature: 1125°F Density: 0.097 lb./in.³

Percent Weight	Elements								Others Each	Others Total	Aluminum
	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti			
Minimum	.6	—	—	—	.40	—	—	—	—	—	—
Maximum	.9	.35	.10	.10	.6	.10	.10	.10	.05	.15	Remainder

Alloy 6105 Chemical Analysis

Liquidus Temperature: 1200°F Solidus Temperature: 1110°F Density: 0.097 lb./in.³

Percent Weight	Elements								Others Each	Others Total	Aluminum
	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti			
Minimum	.6	—	—	—	.45	—	—	—	—	—	—
Maximum	1.0	.35	.10	.15	.8	.10	.10	.10	.05	.15	Remainder

Average Coefficient of Thermal Expansion (68° to 212°F)

6005	13.0 X 10 ⁻⁶ (inch per inch per °F)
6105	13.0 X 10 ⁻⁶ (inch per inch per °F)

Alloy 6005/6105 Mechanical and Physical Property Limits

Temper	Specified Section or Wall Thickness (inches) ²		Tensile Strength (ksi)				Elongation ³ Percent Min. in 2 Inch or 4D ⁴	Typical Thermal Conductivity at 77°F btu-in./lb hr°F	Typical Electrical Conductivity ⁵ (% IACS)			
			Ultimate		Yield (0.2% offset)							
	Min.	Max.	Min.	Max.	Min.	Max.						
Alloy 6005 Standard Tempers												
F	All		No Properties Apply					N/A	N/A			
T1	—	.500	25.0	—	15.0	—	16	1250	47			
T5	—	.124	38.0	—	35.0	—	8	1310	49			
T5	.125	—	38.0	—	35.0	—	10	1310	49			
Alloy 6105 Standard Tempers												
F	All		No Properties Apply					N/A	46			
T1	—	.500	25.0	—	15.0	—	16	1220	—			
T5	—	.500	38.0	—	35.0	—	8	1340	50			
Alloy 6005 Special Tempers												
T1S14 ⁶	—	.124	38.0	—	35.0	—	8	1250	47			
T1S14 ⁶	.125	—	38.0	—	35.0	—	10	1250	47			
T5S3	All		35.0	—	30.0	—	8	N/A	N/A			
T5S11 ⁷	—	.124	38.0	—	35.0	—	8	1310	49			
T5S11 ⁷	.125	—	38.0	—	35.0	—	10	1310	49			

^① The mechanical property limits for standard tempers are listed in the Property Limits section of the Aluminum Association's **Aluminum Standards and Data** manual and **Tempers for Aluminum and Aluminum Alloy Products**. ^② The thickness of the cross section from which the tension test specimen is taken determines the applicable mechanical properties. ^③ For materials of such dimensions that a standard test specimen cannot be taken, or for shapes thinner than .062", the test for elongation is not required. ^④ D=Specimen diameter. ^⑤ Minimum, unless stated as typical. ^⑥ These properties apply to the material after proper artificial aging. No properties apply to shipped product. ^⑦ For stress-relieved tempers, the characteristics and properties other than those specified may differ somewhat from the corresponding characteristics and properties of material in the basic temper.

*Alcoa Special Temper designations are unregistered tempers for reference only and provided for customer use to identify unique processing, material, or end use application characteristics.

Comparative Characteristics of Related Alloys/Tempers¹

Alloy	Temper	Formability		Machinability		General Corrosion Resistance		Weldability (Arc with Inert Gas)		Brazability		Anodizing Response		Typical Conductivity (%IACS)			
		D	C	B	A	D	C	B	A	D	C	B	A	D	C	B	A
6005	-T1			N/A		N/A											
	-T5, T511			N/A		N/A											
6105	-T1			N/A		N/A											
	-T5			N/A		N/A											
6061	-T4																
	-T6																
6063	-T4																
	-T6																
6262	-T6																

^① Rating: A=Excellent B=Good C=Fair D=Poor For further details of explanation of ratings for, see Aluminum Association's **Aluminum Standards and Data** manual.

Alcoa Distribution and Industrial Products

53 Pottsville Street
Cressona, PA 17929
Phone: 800-233-3165
FAX: 800-252-4646

eral information

general information | wrought products

TYPICAL TEMPERATURES®

Table 3 (continued)

Elec- trical Conduc- tion in 1 in., percent	Alloy and Temper	Temp., °F	Tensile Strength, lb		Elonga- tion in 2 in., percent
			Ultimate	Yield@	
46	5456-O	-320	62	26	32
35		-112	46	23	25
32		-18	45	23	22
30		75	45	23	20
26		212	42	22	21
20		300	31	20	18
18		400	23	17	16
16		500	17	11	8
14		600	11	7.5	8
12		700	6	4.2	105
46	6053-T6, -T651	75	37	32	13
35		212	32	28	13
32		300	25	24	13
30		400	14.3	12	25
26		300	3.5	4	70
20		600	4	2.7	80
18		700	2.9	2	90
16	6061-T6, -T651	-320	60	47	22
14		-112	49	42	18
12		-18	47	41	17
10		75	45	40	17
8		212	42	38	18
6		300	34	31	20
4		400	19	15	28
2		500	7.5	5	60
0		600	4.6	2.7	85
-2		700	3	1.8	95
46	6063-T1	-320	34	16	44
32		-112	26	15	36
28		-18	24	14	34
25		75	22	13	33
20		212	22	14	18
18		300	21	15	20
16		400	9	6.5	40
14		500	4.5	3.5	75
12		600	3.2	2.5	80
10		700	2.3	2	105
46	6063-T5	-320	37	24	28
32		-112	29	22	24
28		-18	28	22	23
25		75	27	21	22
20		212	24	20	18
18		300	20	18	20
16		400	9	6.5	40
14		500	4.5	3.5	75
12		600	3.2	2.5	80
10		700	2.3	2	105

TYPICAL TENSILE PROPERTIES AT VARIOUS TEMPERATURES®

Table 3 (continued)

Alloy and Temper	Temp., °F	Tensile Strength, lb		Elonga- tion in 2 in., percent	Alloy and Temper	Temp., °F	Tensile Strength, lb		Elonga- tion in 2 in., percent
		Ultimate	Yield@				Ultimate	Yield@	
6063-T6	-320	47	36	24	7075-T6, -T651	-320	102	92	9
	-112	38	33	20		-112	90	79	11
	-18	36	32	16		-18	86	75	11
	75	35	31	14		75	81	71	11
	212	31	28	15		212	70	65	14
	300	21	20	20		300	31	27	30
	400	9	6.5	40		400	16	13	55
	500	4.5	3.5	75		500	11	9	65
	600	3.3	2.5	80		600	8	6.5	70
	700	2.3	2	105		700	6	4.5	70
6151-T6	-320	37	30	20	7075-T73, -T7331	-320	92	72	14
	-112	50	46	17		-112	79	67	14
	-18	49	43	17		-18	76	65	13
	75	48	43	12		75	73	63	13
	212	43	40	17		212	63	58	15
	300	38	27	20		300	31	27	30
	400	14	12	30		400	16	13	55
	500	6.5	5	30		500	11	9	65
	600	5	3.9	43		600	8	6.5	70
	700	4	3.2	33		700	6	4.5	70
6262-T651	-320	60	47	22	7075-T6, -T651	-320	52	50	12
	-112	49	42	18		-112	62	70	14
	-18	47	41	17		-18	79	68	14
	75	45	40	17		75	78	68	14
	212	42	38	18		212	67	60	18
	300	34	31	20		300	33	28	37
6262-T9	-320	74	67	14		400	16	13	60
	-112	62	58	10		500	11	8.5	100
	-18	60	55	10		600	7.5	6	175
	75	58	53	10		700	5.5	4.3	175
	212	53	52	10					
	300	38	37	14					
	400	15	13	34					
	500	8.5	6	48					
	600	4.6	2.7	85					
	700	3	1.8	95					

① Lowest strengths during 10,000 hours of exposure at test temperature under no load; stress applied at 5,000 psi/min to yield strength and then at strain rate of 0.03 in./in./min to failure.


Under certain conditions of temperature and time, the application of heat will severely affect certain alloy properties of some alloys. The specific information concerning the suitability of the various alloys for use at elevated temperatures, the central sales office of Aluminum Company of America should be consulted.

② Offset equals 0.2 percent.

③ Preferred alloy designation is 6101.

$$21,000^* \text{ YIELD} \times .66 = 13,800 \text{ DS}$$

Stainless Rivet • Stainless Mandrel • IFI Grade 51

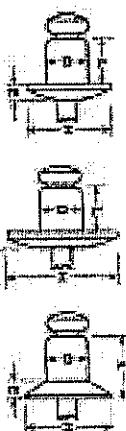

Buttonhead AFS	D (mm)	H (mm)	E (mm)	L (mm)	Grip Range (mm)	Typical Ultimate Strength (Lbs.) (kilograms)				
Part No.	Rivet Dia. Nom. Inch (mm)	Drill No. & Hole Size Nom. Inch (mm)	Head Dia. Nom. Inch (mm)	Head Height Max. Inch (mm)	Rivet Length Max. Inch (mm)	Shear Tensile				
SSB4-16	1/8"(12.5)	#30(29.7-33)	.250	.040	.212	5.4	032-062	0.8-16	520	600
SSB4-2S	3/2	3.33-3.38	6.35	.102	.275	7.0	063-125	1.7-32	2310	2660
SSB4-3S					.337	8.8	126-187	3.3-48		
SSB4-4S					.400	10.7	188-250	4.9-64		
SSB4-5S					.462	11.7	251-312	6.5-79		
SSB4-6S					.525	13.4	313-375	8.0-95		
SSB4-8S					.650	16.5	376-500	9.6-127		
SSB5-2S	5/32"(15.6)	#20(160-164)	.312	.045	.300	.76	102-125	1.6-32	785	1040
SSB5-3S	4.0	4.14(105.4-16)	7.92	.114	.338	8.0	126-187	3.2-48	3450	4620
SSB5-4S					.425	10.9	188-250	4.9-64		
SSB5-6S					.550	14.0	251-375	6.5-95		
SSB5-8S					.675	17.2	376-500	9.6-127		
SSB5-10S					.800	21.3	501-625	12.9-153		
SSB6-2S	3/16"(18.7)	#11(92-196)	.375	.066	.325	.83	032-125	1.6-32	1150	1300
SSB6-4S	4.8	4.13(82.4-86)	9.53	.140	.450	11.5	126-250	3.2-48	5110	5730
SSB6-6S					.575	14.6	251-375	6.5-95		
SSB6-8S					.700	17.7	376-500	9.6-127		
SSB6-10S					.825	21.0	501-625	12.9-153		
SSB6-12S					.950	24.2	626-750	16.0-184		
SSB6-16S					1.200	30.5	751-1000	19.1-254		
SSB8-4S	1/4"(25.0)	F(257-261)	.500	.074	.500	.127	032-250	1.6-64	1700	2100
SSB8-6S	6.4	6.56(52-85)	12.70	.138	.625	15.9	251-375	6.5-95	7500	9240
SSB8-8S					.750	19.1	376-500	9.6-127		
SSB8-10S					.875	21.0	501-625	12.9-153		
SSB8-12S					1.000	25.4	626-750	16.0-184		

Large Flange

SSBL4-2S	1/8"(12.5)	#30(129-135)	.375	.045	.275	7.0	032-125	1.6-32	500	600
SSBL4-3S	3.2	3.30-3.38	9.53	.113	.337	8.6	126-187	3.3-48	2310	2660
SSBL4-4S					.400	10.2	188-250	4.9-64		
SSBL6-4S	3 1/8"(18.7)	#11(192-196)	.615	.082	.450	11.5	062-250	1.6-64	1150	1300
SSBL6-6S	4.8	4.94-52-49.9	15.88	.108	.575	14.6	251-375	6.5-95	5110	5730
SSBL6-8S					.700	17.8	376-500	9.6-127		
SSBL6-10S					.825	21.0	501-625	12.9-153		
SSBL6-12S					.950	24.2	626-750	16.0-184		

120° Countersunk

SSC4-2S	1/8"(12.5)	#30(129-135)	.200	.045	.275	7.0	063-125	1.7-32	520	600
SSC4-3S	3.2	3.30-3.38	5.55	.114	.337	8.6	126-187	3.3-48	2310	2660
SSC4-4S					.400	10.2	188-250	4.9-64		
SSC4-6S					.462	11.7	251-312	6.5-95		
SSC4-8S					.525	13.4	313-375	8.0-95		
SSC6-4S	3 1/8"(18.7)	#11(192-196)	.350	.050	.407	10.3	126-250	3.2-48	1150	1300
SSC6-6S	4.8	4.94-52-49.9	8.39	.127					5110	5730

KLIK-FAST RIVETS conform to IFI-114 (inch) and IFI-505 (metric). Millimeters (mm) and newtons (N) are in green.

TEMEC

Inmecol

COVERAGE RATES

	Dry Mil (Microns)	Wet Mil (Microns)	Sq Ft/Gal (m ² /Gal)
Suggested	10.0 (255)	15.5 (395)	103 (9.5)
Minimum	8.0 (205)	12.5 (320)	128 (11.9)
Maximum	12.0 (305)	19.0 (480)	86 (7.9)

Allow for overspray and surface irregularities. Film thickness is rounded to the nearest 0.5 mil or 5 microns. Application of coating below minimum or above maximum recommended dry film thicknesses may adversely affect coating performance.

MIXING Stir thoroughly, making sure no pigment remains on the bottom of the can.

THINNING Use No. 2 Thinner. For air or airless spray, brush or roller, thin up to 5% or ¼ pint (190 mL) per gallon if necessary. Drum heaters or inline heaters may be necessary to maintain application viscosity during cool weather.

SURFACE TEMPERATURE Minimum 40°F (4°C) Maximum 135°F (57°C)

The surface should be dry and at least 5°F (3°C) above the dew point.

APPLICATION EQUIPMENT

Air Spray						
Gun	Fluid Tip	Air Cap	Air Hose ID	Mat'l Hose ID	Atomizing Pressure	Pot Pressure
DeVilbiss MBC or JGA	E	704	3/8" or 1/2" (9.5 or 12.7 mm)	1/2" or 3/4" (12.7 or 19 mm)	50 psi (3.4 bar)	20 psi (1.4 bar)

Low temperatures or longer hoses require higher pot pressure.

Airless Spray

Tip Orifice	Atomizing Pressure	Mat'l Hose ID	Manifold Filter
0.017"-0.031" (430-785 microns)	2400-3000 psi (165-207 bar)	3/8" or 1/2" (9.5 or 12.7 mm)	60 mesh (250 microns)

Use appropriate tip/atomizing pressure for equipment, applicator technique and weather conditions.

Roller: Use high quality synthetic nap covers. Short nap for smooth surfaces. Long nap for rough surfaces. Note: Two or more coats may be required to obtain recommended film thicknesses.

Brush: Use high quality nylon or synthetic bristle brushes. Note: Two or more coats may be required to obtain recommended film thicknesses.

CLEANUP Flush and clean all equipment immediately after use with the recommended thinner or xylol.

WARRANTY & LIMITATION OF SELLER'S LIABILITY: Temec Company, Inc. warrants only that its coatings represented herein meet the formulation standards of Temec Company, Inc. THE WARRANTY DESCRIBED IN THE ABOVE PARAGRAPH SHALL BE IN LIEU OF ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THERE ARE NO WARRANTIES THAT EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. The buyer's sole and exclusive remedy against Temec Company, Inc. shall be for replacement of the product in the event a defective condition of the product should be found to exist and the exclusive remedy shall not have failed its essential purpose as long as Temec is willing to provide comparable replacement product to the buyer. NO OTHER REMEDY (INCLUDING, BUT NOT LIMITED TO, INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR LOST PROFITS, LOST SALES, INJURY TO PERSON OR PROPERTY, ENVIRONMENTAL INJURIES OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL LOSS) SHALL BE AVAILABLE TO THE BUYER. Technical and application information herein is provided for the purpose of establishing a general profile of the coating and proper coating application procedures. Test performance results were obtained in a controlled environment and Temec Company makes no claim that these tests or any other tests, accurately represent all environments. As application, environmental and design factors can vary significantly, due care should be exercised in the selection and use of the coating. FOR INDUSTRIAL USE ONLY.

DATA SHEET

TUTTLE ALUMINUM
120 SHADLOWLAWN DRIVE

FISHERS IN 46038

COAL TAR CTG. H.B. TNEMEC

FOR COATINGS, RESINS, AND RELATED MATERIALS
 APPROVED BY THE U.S. DEPARTMENT OF LABOR AS
 ESSENTIALLY SIMILAR TO FORM OSHA-20.
 (MEETS REQUIREMENTS OF CFR 29 PART 1910.1200,
 OSHA'S HAZARD COMMUNICATION STANDARD)

NPCA 1-84

SECTION 1 - MANUFACTURER AND PRODUCT INFORMATION

CHEMICAL PRODUCT IDENTIFICATION:

PRODUCT ID : F046-0465 5G
 PRODUCT CLASS : COAL TAR
 TRADE NAME : COAL TAR CTG. H.B. TNEMEC
 FORMULA VERSION NUMBER : 5
 MSDS PREPARATION DATE : 01/18/2001

MANUFACTURER IDENTIFICATION:

NAME : TNEMEC COMPANY, INC.
 ADDRESS : 123 WEST 23RD AVENUE
 NORTH KANSAS CITY, MO. 64116-3064
 TELEPHONE : 816-474-3400
 EMERGENCY TELEPHONE : 816-474-1425

SECTION 2 - HAZARDOUS INGREDIENTS

1 MAGNESIUM SILICATE

CAS# 14807-96-6
 TALC (NO ASBESTOS FIBERS/RESPIRABLE DUST)
 PCT BY WT: 11-20

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0002.00 MG/M³
 OSHA PEL/TWA: 0002.00 MG/M³

2

CAS# 7727-43-7
 BARIUM SULFATE (TOTAL DUST)
 PCT BY WT: 21-30

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0010.00 MG/M³
 OSHA PEL/TWA: 0010.00 MG/M³

3

CAS# 65996-93-2
 REFINED COAL TAR PITCH (CONTAINS PPAH'S)
 PCT BY WT: 34.4860

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0000.20 MG/M³
 OSHA PEL/TWA: 0000.20 MG/M³

4 METHYLBENZENE

CAS# 108-88-3
 TOLUENE
 PCT BY WT: 5.6690 VAPOR PRESSURE: 22.000 MMHG @ 68F

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0050.00 PPM
 OSHA PEL/TWA: 0100.00 PPM
 OSHA STEL: 0150.00 PPM

5

CAS# 100-41-4
 ETHYL BENZENE
 PCT BY WT: 2.6770 VAPOR PRESSURE: 6.000 MMHG @ 68F

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0100.00 PPM
 ACGIH TLV/STEL: 0125.00 PPM
 OSHA PEL/TWA: 0100.00 PPM
 OSHA STEL: 0125.00 PPM

6 XYLENE

CAS# 1330-20-7
 DIMETHYLBENZENE
 PCT BY WT: 11.0730 VAPOR PRESSURE: 5.100 MMHG @ 68F

EXPOSURE LIMIT:
 ACGIG TVL/TWA: 0100.00 PPM
 ACGIH TLV/STEL: 0150.00 PPM
 OSHA PEL/TWA: 0100.00 PPM
 OSHA STEL: 0150.00 PPM

 This product contains one or more reported carcinogens or suspected
 carcinogens which are noted NTP, IARC, or OSHA-Z in the other limits

TNEMEC COMPANY, INC.
MATERIAL SAFETY DATA SHEET

F046-0465 5G

COAL TAR CTG. H.B. TNEMEC

SECTION 4 - FIRST AID MEASURES

EYE CONTACT:

Flush immediately with large amounts of clean water under low pressure for at least 15 minutes. Consult a physician.

SKIN CONTACT:

Wash affected area with soap and water. Remove contaminated clothing. Dispose of or launder accordingly. Consult a physician if skin irritation persists.

INHALATION:

Remove affected individual to fresh air. Treat symptomatically. If breathing is difficult, administer oxygen. If breathing has stopped give artificial respiration. Consult a physician.

INGESTION:

Drink 1 or 2 glasses of water to dilute. Do not induce vomiting. Consult a physician or poison control center IMMEDIATELY. Treat symptomatically.

NOTE TO PHYSICIAN:

SECTION 5 - FIRE AND EXPLOSION HAZARD DATA

FIRE AND EXPLOSIVE PROPERTIES OF THE CHEMICAL:

Flammability Classification	80.0
Flashpoint	Low : 1.0
Explosion Level	High : -N/A
Flammability Limits	Lower : -N/A Higher : -N/A

EXTINGUISHING MEDIA:

Foam, carbon dioxide, and dry chemical.

FIRE-FIGHTING PROCEDURES AND EQUIPMENTS:

Keep away from heat, open flames, sparks, and areas where static charge may be generated. Do not apply to hot surfaces due to possible fire and explosion risk. For closed containers, pressure build-up and possible explosion might occur due to extreme heat exposure. Solvent vapors are heavier than air and may travel considerable distance to a source of ignition and flash back.

Water may be used to cool unruptured containers. Wear self-contained breathing apparatus with a full facepiece operated in pressure-demand or other positive pressure mode to prevent inhalation of hazardous decomposition products. Use appropriate extinguishing media to control fire. Water may cause violent frothing if sprayed directly into containers of burning liquid.

SECTION 6 - SPILL OR LEAK PROCEDURES

CLEAN-UP:

Remove all sources of ignition. Spills may be collected with inert, absorbent material for proper disposal. Use non-sparking tools, protective gloves, goggles and clothing, adequate ventilation, avoid the breathing of vapors and use respiratory protective devices. Transfer absorbent material to suitable containers for proper disposal.

SECTION 7 - SPECIAL PRECAUTIONS

HANDLING AND STORAGE:

Store in dry area. Keep closures tight and upright to prevent leakage. Do not store in high temperature areas or near fire or open flame. Refer to product data sheet for recommended storage temperatures.

SPECIAL COMMENTS:

Prevent prolonged breathing of airborne contaminants such as vapor, spray mists, or dusts. Prevent contact with skin and eyes. Do not take internally. Keep out of reach of children. Do not reuse or alter containers without proper industrial cleaning. Do not weld or flame cut empty, uncleared containers due to potential fire and explosion hazard. Consult product data sheet for proper application instructions.

TNEMEC COMPANY, INC.
MATERIAL SAFETY DATA SHEET

F046-0465 5G

COAL TAR CTG. H.B. TNEMEC

SECTION 12 - ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION:

SECTION 13 - DISPOSAL CONSIDERATIONS

WASTE DISPOSAL:

Dispose of in accordance with Federal, state, and local regulations regarding pollution.

SECTION 14 - TRANSPORT INFORMATION

DOT HAZARD CLASS

TRANSPORTATION ASSISTANCE:

Contact Tnemec's Traffic department @ (816) 474-3400.

SECTION 15 - REGULATORY INFORMATION

FEDERAL REGULATIONS:

This product contains the following toxic chemicals subject to the reporting requirements of Section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 and of 40 CFR 372:

TOLUENE

CAS# 108-88-3 PCT BY WT: 5.6690

ETHYL BENZENE

CAS# 100-41-4 PCT BY WT: 2.6770

DIMETHYLBENZENE

CAS# 1330-20-7 PCT BY WT: 11.0730

STATE REGULATIONS:

SECTION 16 - OTHER INFORMATION

Prepared by : Kevin Settles
Date of issue : 01/18/2001
Last Revision Date : 02/23/1997

MSDS Prepared for : TUTTLE ALUMINUM
120 SHADLOWLAWN DRIVE

FISHERS

IN 46038

MSDS Last Prepared : 04/27/2000

HMIS Information: Health- 3* Flammability- 3
Reactivity- 1

For specific information regarding occupational safety and health standards, please refer to the Code of Federal Regulations, Title 29, Part 1910.

To the best of our knowledge, the information contained herein is accurate. However, neither the Tnemec Company or any of its subsidiaries assume any liability whatsoever for the accuracy of completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown health hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards which exist.

FOR COATINGS, RESINS, AND RELATED MATERIALS
 (APPROVED BY THE U.S. DEPARTMENT OF LABOR AS
 'ESSENTIALLY SIMILAR' TO FORM OSHA-20)
 (MEETS REQUIREMENTS OF CFR 29 PART 1910.1200,
 OSHA'S HAZARD COMMUNICATION STANDARD)

NPCA 1-84

SECTION 1 - MANUFACTURER AND PRODUCT INFORMATION

CHEMICAL PRODUCT IDENTIFICATION:

PRODUCT ID	:	F041-0002	5G
PRODUCT CLASS	:	THINNER	
TRADE NAME	:	THINNER CLEAR	
FORMULA VERSION NUMBER	:	2	
MSDS PREPARATION DATE	:	01/18/2001	
MANUFACTURER IDENTIFICATION:			
NAME	:	TNEMEC COMPANY, INC.	
ADDRESS	:	123 WEST 23RD AVENUE NORTH KANSAS CITY, MO. 64116-3064	
TELEPHONE	:	816-474-3400	
EMERGENCY TELEPHONE	:	816-474-1425	

SECTION 2 - HAZARDOUS INGREDIENTS

¹
 CAS# 100-41-4
 ETHYL BENZENE

PCT BY WT: 19.9980 VAPOR PRESSURE: 6.000 MMHG @ 68F

EXPOSURE LIMIT:

ACGIG TVL/TWA:	0100.00	PPM
ACGIH TLV/STEL:	0125.00	PPM
OSHA PEL/TWA:	0100.00	PPM
OSHA STEL:	0125.00	PPM

² XYLENE

CAS# 1330-20-7
 DIMETHYLBENZENE

PCT BY WT: 80.0020 VAPOR PRESSURE: 5.100 MMHG @ 68F

EXPOSURE LIMIT:

ACGIG TVL/TWA:	0100.00	PPM
ACGIH TLV/STEL:	0150.00	PPM
OSHA PEL/TWA:	0100.00	PPM
OSHA STEL:	0150.00	PPM

 This product contains one or more reported carcinogens or suspected carcinogens which are noted NTP, IARC, or OSHA-Z in the other limits recommended column.

 This substance contains a material classified as a hazardous air pollutant.

SECTION 3 - HEALTH HAZARD INFORMATION

EMERGENCY OVERVIEW:

POTENTIAL HEALTH EFFECTS:

EYE:

Severe irritation.

Redness, tearing, blurred vision.

SKIN:

Moderate irritation, drying of skin, defatting and possible dermatitis.

INHALATION - OVEREXPOSURE TO SOLVENT VAPORS OR SPRAY MIST:
 Nasal and respiratory irritation, anesthetic effects, dizziness, possible unconsciousness and asphyxiation, stupor, weakness, fatigue, nausea, and headache.

INHALATION - OVEREXPOSURE TO FREE PIGMENT DUST:

INGESTION:
 Gastrointestinal irritation, nausea, vomiting, diarrhea, death, aspiration into the lungs which can be fatal.

CHRONIC EFFECTS:

NOTICE: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the vapors may be harmful or fatal.
 Based on an International Agency for Research on Cancer (IARC) conclusion

TNEMEC COMPANY, INC.
MATERIAL SAFETY DATA SHEET

F041-0002 5G

THINNER CLEAR

SECTION 6 - SPILL OR LEAK PROCEDURES

CLEAN-UP:

Remove all sources of ignition. Spills may be collected with inert, absorbent material for proper disposal. Use non-sparking tools, protective gloves, goggles and clothing, adequate ventilation, avoid the breathing of vapors and use respiratory protective devices. Transfer absorbent material to suitable containers for proper disposal.

SECTION 7 - SPECIAL PRECAUTIONS

HANDLING AND STORAGE:

Store in dry area. Keep closures tight and upright to prevent leakage. Do not store in high temperature areas or near fire or open flame. Refer to product data sheet for recommended storage temperatures.

SPECIAL COMMENTS:

Prevent prolonged breathing of airborne contaminants such as vapor, spray mists, or dusts. Prevent contact with skin and eyes. Do not take internally. Keep out of reach of children. Do not reuse or alter containers without proper industrial cleaning. Do not weld or flame cut empty, uncleared containers due to potential fire and explosion hazard. Consult product data sheet for proper application instructions.

SECTION 8 - SAFE HANDLING AND USE INFORMATION

HYGIENIC PRACTICES:

Wash hands and other contaminated skin areas with warm soap and water before eating.

EYE PROTECTION:

Use chemical resistant splash type goggles.

RESPIRATORY PROTECTION:

Respiratory protective devices must be used when engineering and administration controls are not adequate to maintain Threshold Limit Values (TLV) and Permissible Exposure Limits (PEL) of airborne contaminants below the listed values for those hazardous ingredients identified in Section II of this MSDS. Observe OSHA regulations for respirator use (CFR 29, 1910.134) whenever a respirator is used. Particulate, chemical cartridge air purifying half-mask respirators can be used within certain limitations; consult the respirator manufacturer for specific uses and limitations. Where airborne contaminant concentrations are unknown, the use of a NIOSH/MSHA approved fresh-air supplied respirator is mandatory.

OTHER PROTECTION:

Use Chemical resistant gloves.

Use chemical resistant coveralls or apron to protect against skin and clothing contamination.

Use protective cream where skin contact is likely.

VENTILATION:

Sufficient ventilation, in volume and pattern, should be provided through both local and general exhaust to keep the air contaminant concentration below current applicable OSHA Permissible Exposure Limits (PEL) and ACGIH's Threshold Limit Values (TLV). Appropriate ventilation should be employed to remove hazardous decomposition products formed during welding or flame cutting operations of surfaces coated with this product.

Heavier than air solvent vapors should be removed from lower levels of work area due to potential explosion hazard and all ignition sources (non-explosion proof equipment) should be eliminated if flammable mixtures will be encountered.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Vapor Pressure	6.00
Vapor Density	-N/A
Boiling Range	Lower - 275.0 °F Higher - 288.0 °F
Formula Weight per Volume	7.2000 LB/GL
VOC IN LBS PER GALLON	7.2000 (Ether = 1)
Evaporation Rate	9.400 (Ether = 1)

TNEMEC COMPANY, INC.
MATERIAL SAFETY DATA SHEET

F041-0002 5G

THINNER CLEAR

MSDS Last Prepared : 04/27/2000

HMIS Information: Health- 2 Flammability- 3
Reactivity- 1

For specific information regarding occupational safety and health standards, please refer to the Code of Federal Regulations, Title 29, Part 1910.

To the best of our knowledge, the information contained herein is accurate. However, neither the Tnemec Company or any of its subsidiaries assume any liability whatsoever for the accuracy of completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown health hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards which exist.



Basic Cleaning Procedures for Anodic Finishes

Cleaning of light surface soil may be accomplished using the following methods:

- Flush surface with water using moderate pressure to remove soil. If soil is still adhering after drying, a mild detergent may be necessary.
- When mild detergent or soap is necessary, it should be used with brushing (non-metal) or sponging. The surface must be thoroughly rinsed with clean water after the use of any cleaning agent. It may be necessary to sponge the surface while rinsing, particularly if the cleaner is permitted to dry on the surface. Mild detergents ruled safe for bare hands should be safe for coated aluminum. Stronger detergents should be carefully spot tested and may necessitate the use of rubber gloves, long handled brushes, etc.
- If surface soil still adheres after following the procedures above, cleaning using a palm-sized nylon pad can be employed. Thoroughly wet pad with clean water or a mild detergent. Rub the metal surface in the direction of the metal grain with uniform pressure. After scrubbing, the metal surface should be rinsed thoroughly using clean water to remove all residues. Solvents may be used to remove non-water soluble deposits. Extreme care must be exercised when solvents are used since they may damage organic sealants, gaskets and painted finishes. If solvents are used, rinse the surface completely with clean water.

Cleaning Precautions

- Never use aggressive alkaline or acid cleaners on aluminum finishes. Do not use cleaners containing trisodium phosphate, phosphoric acid, hydrochloric acid, hydrofluoric acid, fluorides, or similar compounds on anodized aluminum surfaces. Always follow the cleaner manufacturer's recommendations as to the proper cleaner and concentration. Test-clean a small area first. Different cleaners should not be mixed.
- It is preferable to clean the metal when shaded. Do not attempt to clean hot, sun-heated surfaces since possible chemical reactions on hot metal surfaces will be highly accelerated and non-uniform. Also, avoid cleaning in freezing temperatures or when metal temperatures are sufficiently cold to cause condensation. Surfaces cleaned under these adverse conditions can become streaked or tainted that they cannot be restored to their original appearance.

References

VOLUNTARY GUIDE SPECIFICATION FOR CLEANING AND MAINTENANCE
OF ARCHITECTURAL ANODIZED ALUMINUM, AAMA 609.1
American Architectural Manufacturers Association

R1843 Austin WTP #4
Aluminum Railing Design Calculations – REI # R11-09-01H
Austin, TX

Prepared for
Rocky Mountain Railings
Denver, CO

Date: 9/26/11

Design Criteria:

1. Railing live loads per Project Specifications (IBC 2006):

Guardrails

50 plf uniform load in any direction on top rail
200 pound concentrated load in any direction on top rail
50 pound concentrated load over 1 ft² of infill area
Concentrated load and uniform loads need not be assumed to act concurrently

Railing deflections per ASTM E985

Members designed per Aluminum Association Inc, "Aluminum Design Manual"

2. Aluminum member sizes shall be as recommended in the calculation booklet
3. Aluminum alloys shall be as recommended in the calculation booklet
4. Stainless steel fasteners to be minimum Condition "CW", Fy= 65 ksi
5. Aluminum welds to be filler alloy 5356, unless noted otherwise
6. Concrete strength is assumed to be F'c= 4,000 psi, normal weight
7. Additional RISA Finite Element Analysis model data available upon request.

RICE
ENGINEERING


105 School Creek Trail
Luxemburg, WI 54217
Phone: 920.845.1042
Fax: 920.845.1048
www.rice-inc.com

Texas Firm No: F-2183
L. David Rice
Registration No: 81248

This Certification is limited to the structural design of
structural components of this handrail or divider system.
It does NOT include responsibility for:

- Structural design of misc. hardware (latches, hinges, etc.).
- Structural design of concrete slabs and other masonry units
- Structural design of wood blocking or wood framing
- Structural design of all other anchorage substrates
- The manufacture, assembly, or installation of the system.
- Quantities of materials or dimensional accuracy of drawings

Engineers Design Approval Stamp:

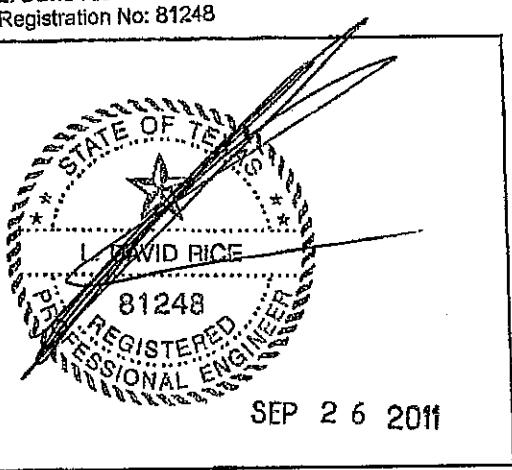



Sheet Number	Description	Date	Revision	Sheet Number	Description	Date
PL	Project Location & Specs	9/16/11				
A	Guardrail "A"	9/16/11				
A1-A1B	Guardrail "A" Analysis	9/16/11				
A2	2-Bolt Base Plate	9/16/11				
B	Guardrail "B"	9/16/11				
B1-B1B	Guardrail "B" Analysis	9/16/11				
B2	Surface Mount Anchor	9/16/11				
B3	Hilti Adhesive	9/16/11				
C	Guardrail "C"	9/16/11				
C1-C1B	Guardrail "C" Analysis	9/16/11				
C2	Side Mount Anchorage	9/16/11				
C3	Side Mount Anchorage	9/16/11				
C3A	Hilti Adhesive	9/16/11				
C4	Side Mount Anchorage	9/16/11				
C4A	Hilti Adhesive	9/16/11				
D	Guardrail "D"	9/16/11				
D1-D1B	Guardrail "D" Analysis	9/16/11				
D2	Side Mount Anchor	9/16/11				
K1-K1B	Guardrail "K" Analysis	9/16/11				
K2	4 Bolt Raked Base Plate	9/16/11				
M1	Miscellaneous Connections	9/16/11				
M1A	RISA FEA Model	9/16/11				
M2	Wall Rail Bracket Analysis	9/16/11				
M3	Offset Rail Connections	9/16/11				
M4	Grab Rail Bracket Analysis	9/16/11				
M5	2-Bolt Raked Base Plate	9/16/11				
M5A	Algor FEA Model	9/16/11				

This Certification is limited to the structural design of structural components of this handrail or divider system. It does NOT include responsibility for:

- Structural design of misc. hardware (latches, hinges, etc.).
- Structural design of concrete slabs and other masonry units
- Structural design of wood blocking or wood framing
- Structural design of all other anchorage substrates
- The manufacture, assembly, or installation of the system.
- Quantities of materials or dimensional accuracy of drawings

Engineers Design Approval Stamp:

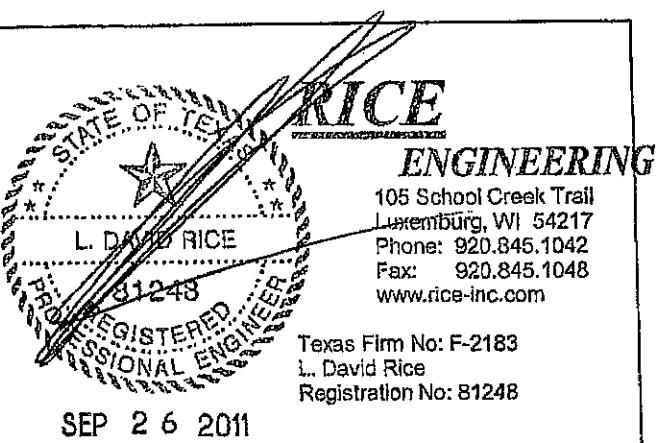

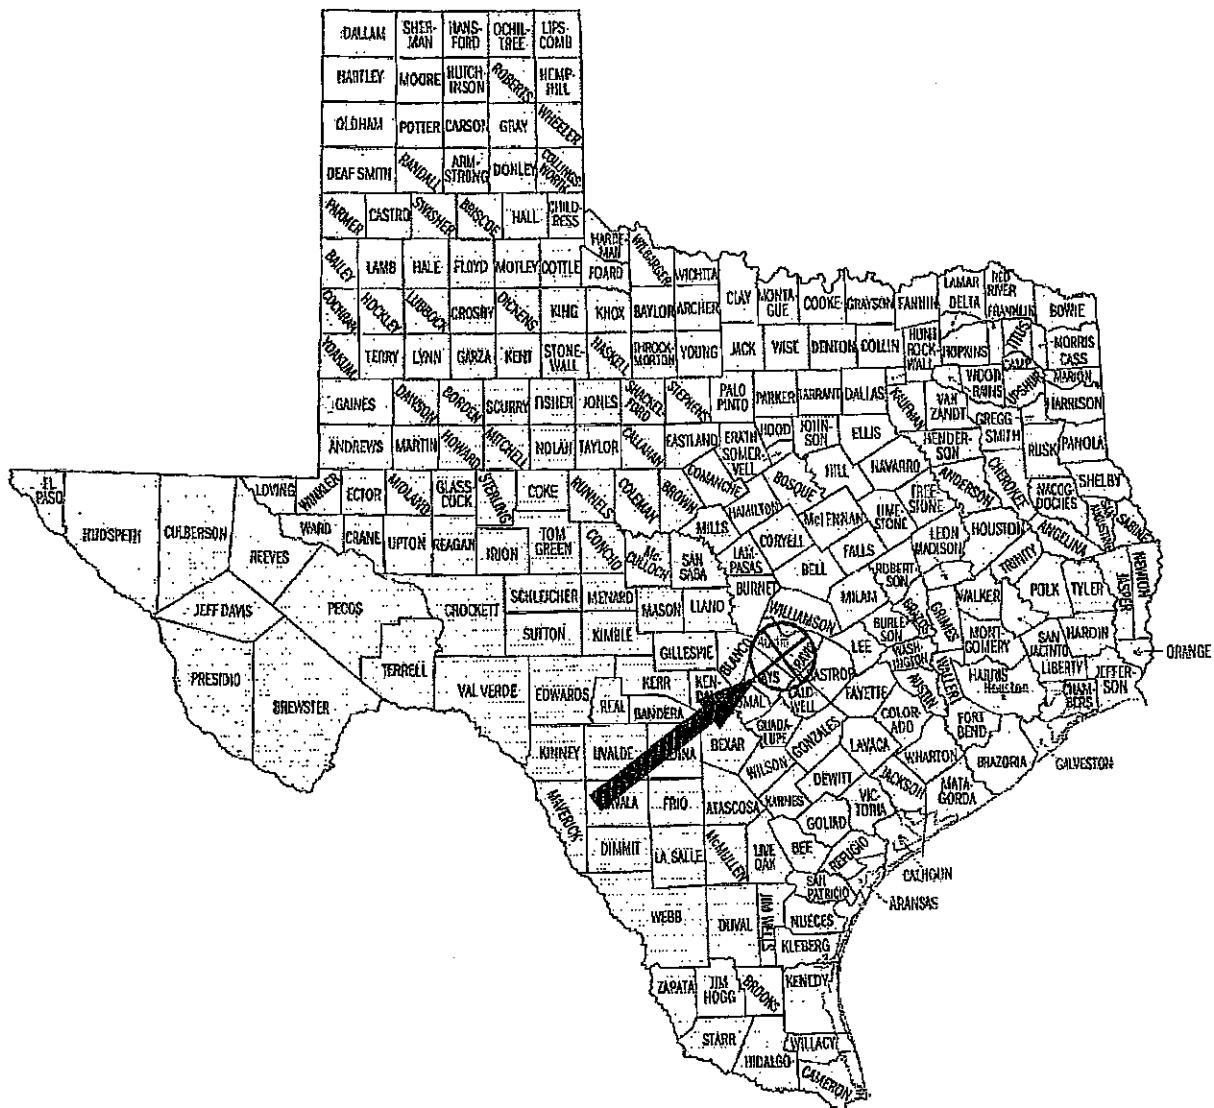

Project Location: Austin, TX


- Design Loads per Project Specification (IBC 2006)

50 plf uniform load in any direction on top rail

200# concentrated load in any direction on top rail

50# concentrated load applied laterally over 1 ft² of infill

RICE ENGINEERING Template:	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
			Engineer: JDB Sheet No: PL
			Date: 9/16/11 Rev:
			Chk By: Date:

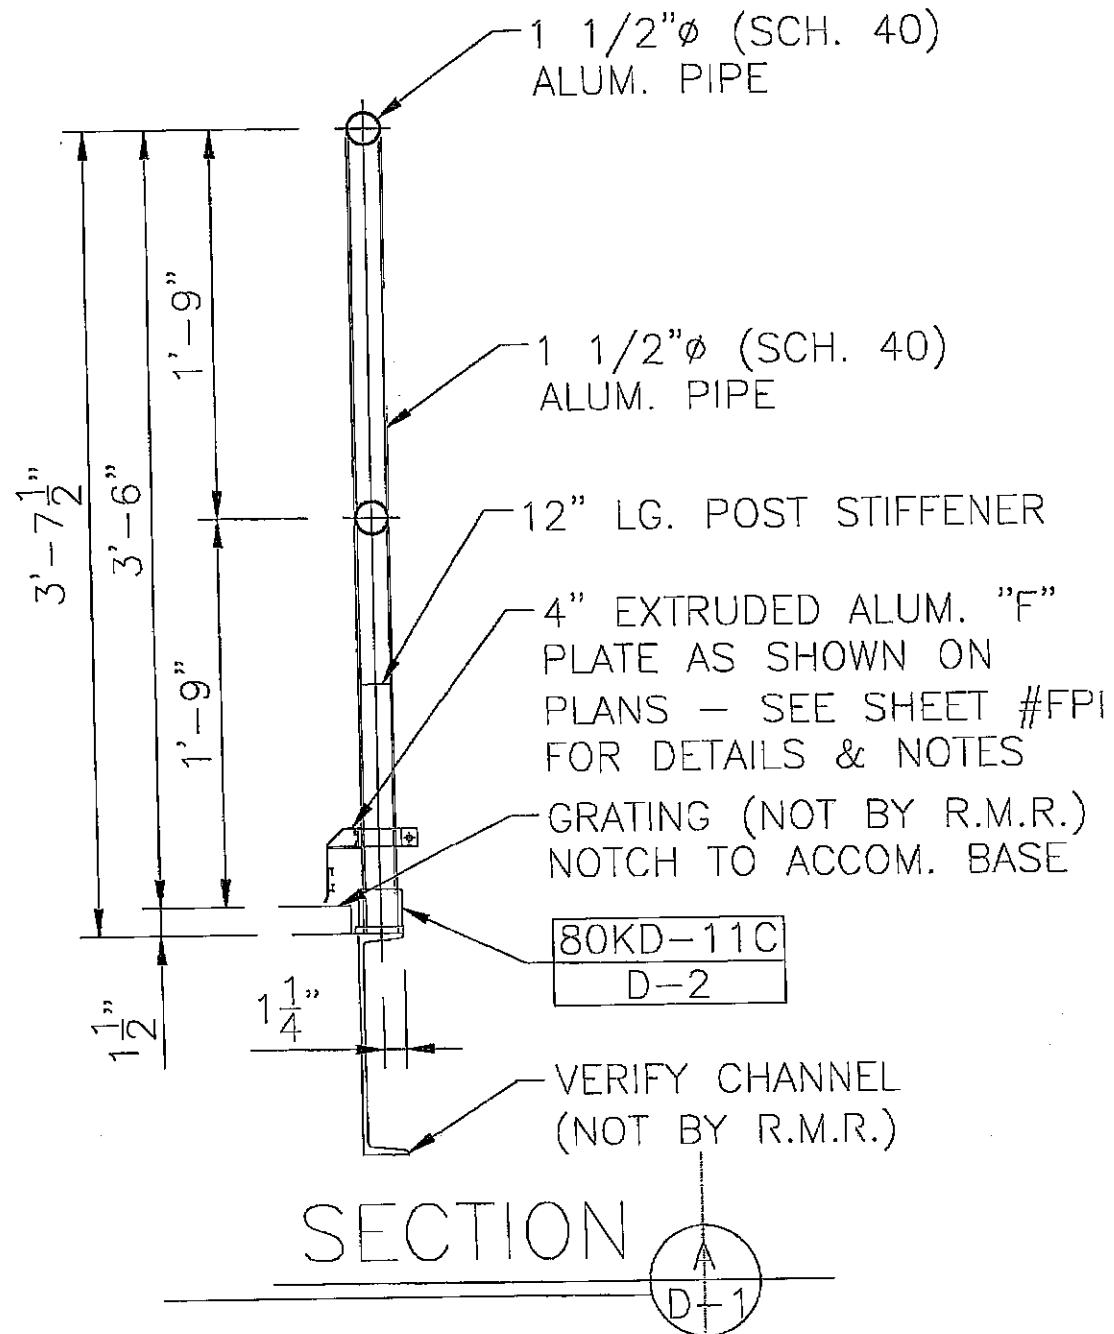

Note: Structural steel, Concrete, CMU and all other anchorage substrates designed by others



ROCKY MOUNTAIN RAILINGS

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707			Engineer: JDB Sheet No: A
			Date: 9/16/11 Rev:
			Chk By: Date:

Pipe Railing & Post

These calculations are based on empirical test data performed by Julius Blum & Co., Inc.

Guardrail "A" Analysis

SHT
A1

Input Variables:

$F_H := 50$	plf	Load Case 1 (Uniform Load)
$F_V := 0$	plf	Simultaneous Vertical Uniform Load
$P := 200$	lb	Load Case 2 (Point Load)
$L_{bp} := 20$	in	Unbraced Length of Post
$h := 43.5$	in	Railing Height
$L := 60$	in	5'-0" MAX POST SPACING

Number of Railing Spans:

- 1 span
- 2 span
- 3 or more spans

Railing Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Railing Temp:

- 6063-T5
- 6063-T6
- 6061-T6 or 6105-T5
- 4/3 increase allowed
- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate


Post Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Post Temp:

- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

All calculations below this line are automatic

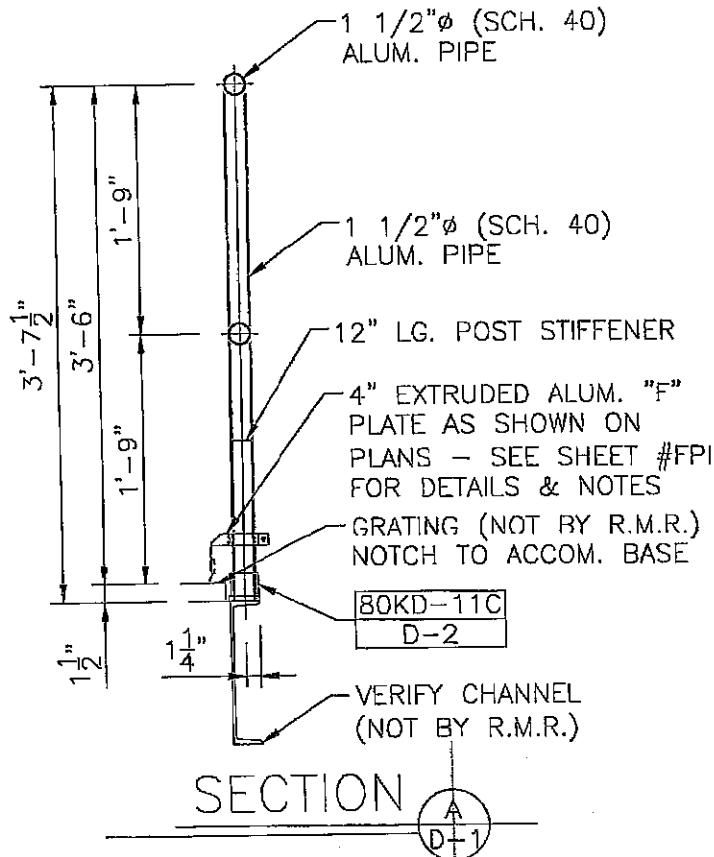

Railing Properties

$k_r =$	0.31
$l_r =$	0.31
$S_xr =$	0.326
$S_yr =$	0.326
$R_r =$	0.95
$t_r =$	0.145

Post Properties

$k_r =$	0.31
$l_r =$	0.31
$S_xr =$	0.326
$S_yr =$	0.326
$R_r =$	0.95
$t_r =$	0.145

Computational Factors

$$SR_1 := \frac{R_r}{t_r} \quad SR_1 = 6.55 \quad K_1 := (8 \cdot q_1) + (8 \cdot q_2) + (9.5 \cdot q_3) \quad K_1 = 8$$

$$K_2 := (4 \cdot q_1) + (5 \cdot q_2) + (5 \cdot q_3) \quad K_2 = 5$$

$$SR_3 := \frac{R_p}{t_p} \quad SR_3 = 6.55 \quad K_3 := (48 \cdot q_1) + (66 \cdot q_2) + (87 \cdot q_3) \quad K_3 = 66$$

$E_r := 10100000$ psi

$J_{xotr} := J_{xr}$

$J_{xotr} = 0.31$

in⁴

$J_{xtotp} := J_{xp}$

$J_{xtotp} = 0.31$

in⁴

12" Min. Length AL. Ribbed Tube Stub

$J_{yotr} := J_{yr}$

$J_{yotr} = 0.31$

in⁴

$J_{yotp} := J_{yp}$

$J_{yotp} = 0.31$

in⁴

$I_{st} = 0.174$

in⁴

$L_{st} := 12$ in

$S_{st} = 0.224$ in³

$F_{bst} = 25000$ psi

RICE
ENGINEERING
Template: REI-MC-5707

105 School Creek Trail
Luxemburg, WI 54217
Phone: (920)845-1042
Fax: (920)845-1048
www.rice-inc.com

Project Description:
R1843 Austin WTP #4

Job No:	R11-09-01H		
Engineer:	JDB	Sheet No:	A1
Date:	9/16/11		Rev:
Chk By:	Date:		

Railing Analysis:

$$W_h := \frac{F_h}{12}$$

$$W_v := \frac{F_v}{12}$$

Guardrail "A" Analysis

 SHT
A1 A

Case 1 Uniform Load:

$$\Delta_{yr1} := \frac{5 \cdot W_h \cdot L^4}{384 \cdot E_r \cdot I_{ytotr}}$$

$$\Delta_{yr1} = 0.225 \quad \text{in} \quad \text{Modeled as a simple span}$$

$$\Delta_{xr1} := \frac{5 \cdot W_v \cdot L^4}{384 \cdot E_r \cdot I_{xtotr}}$$

$$\Delta_{xr1} = 0 \quad \text{in}$$

$$\Delta_{allr} := \frac{L}{96}$$

$$\Delta_{allr} = 0.63 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

$$M_{yrmmax} := \frac{W_h \cdot L^2}{K_1}$$

$$M_{yrmmax} = 1875 \quad \text{lb-in}$$

$$M_{xrmmax} := \frac{W_v \cdot L^2}{K_1}$$

$$M_{xrmmax} = 0 \quad \text{lb-in}$$

$$f_{bry1} := \frac{M_{yrmmax}}{S_yr}$$

$$f_{bry1} = 5752 \quad \text{psi}$$

$$f_{bxr1} := \frac{M_{xrmmax}}{S_xr}$$

$$f_{bxr1} = 0 \quad \text{psi}$$

Case 2 - Point Load:

$$\Delta_{yr2} := \frac{P \cdot L^3}{K_3 \cdot E_r \cdot I_{ytotr}}$$

$$\Delta_{yr2} = 0.209 \quad \text{in}$$

$$M_{yrmmax2} := \frac{P \cdot L}{K_2}$$

$$M_{yrmmax2} = 2400 \quad \text{lb-in}$$

$$f_{bry2} := \frac{M_{yrmmax2}}{S_yr}$$

$$f_{bry2} = 7362 \quad \text{psi}$$

$$F_{bry} := \begin{cases} (f_{bry1} \cdot 1.33) & \text{if IBC = 1} \\ f_{bry1} & \text{otherwise} \end{cases} \quad F_{bry} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_{r1} := \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \quad Int_{r1} = 0.23$$

$$Int_{r2} := \frac{f_{bry2}}{F_{bry}} \quad Int_{r2} = 0.29$$

$$RAILS := \begin{cases} "OK" & \text{if } \frac{\max(\Delta_{yr1}, \Delta_{xr1}, \Delta_{yr2})}{\Delta_{allr}} \leq 1 \wedge \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \leq 1 \wedge \frac{f_{bry2}}{F_{bry}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases} \quad RAILS = "OK"$$

RICE ENGINEERING Template: REI-MC-5707	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No:	R11-09-01H	
			Engineer:	JDB	Sheet No: A1 A
			Date:	9/16/11	Rev:
			Chk By:	Date:	

Post Analysis:

$$E_p := E_r$$

Guardrail "A" Analysis

SHT
A1 B

$$\Delta_{xp1} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

$$\Delta_{xp1} = 0.832 \quad \text{in}$$

$$\Delta_{xp2} := \frac{P \cdot 0.85 \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

$$\Delta_{xp2} = 0.566 \quad \text{in}$$

Max Deflection:

$$\Delta_{tot} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}} + \frac{W_h \cdot L \cdot [h^3 - (h - L_{st})^3]}{3 \cdot [(E_p \cdot I_{xp}) + (E_p \cdot I_{st})]}$$

$$\Delta_{tot} = 1.702 \quad \text{in}$$

$$\Delta_{allp} := \frac{h}{12}$$

$$\Delta_{allp} = 3.63 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

Case 1 - Uniform Load:

$$M_{xp} := (W_h \cdot L \cdot h) + W_v \cdot L \cdot \Delta_{tot}$$

$$M_{xpmax} := 0.5 \cdot M_{xp} \cdot q1 + M_{xp} \cdot q2 + M_{xp} \cdot q3$$

$$M_{xpmax} = 10875 \quad \text{lb-in}$$

$$M_{xp2} := W_h \cdot L \cdot (h - L_{st}) + W_v \cdot L \cdot \Delta_{xp1}$$

$$M_{xpmax2} := 0.5 \cdot M_{xp2} \cdot q1 + M_{xp2} \cdot q2 + M_{xp2} \cdot q3$$

$$M_{xpmax2} = 7875 \quad \text{lb-in}$$

Case 2 - Point Load:

$$M_{xpmax4} := P \cdot (h - L_{st}) \cdot 0.85$$

$$M_{xpmax4} = 5355 \quad \text{lb-in}$$

$$M_{xpmax3} := (P \cdot h \cdot 0.85)$$

$$M_{xpmax3} = 7395 \quad \text{lb-in}$$

Max Post Stress:

$$f_{bp} := \frac{\max(M_{xpmax2}, M_{xpmax4})}{S_{xp}}$$

$$f_{bp} = 24156 \quad \text{psi}$$

$$F_{bp} := \begin{cases} (F_{bp} \cdot 1.33) & \text{if IBC = 1} \\ F_{bp} \cdot 1 & \text{otherwise} \end{cases}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Post/Stub Combined Stress:

$$f_{bp}2 := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{xp}}{(I_{xp} + I_{st}) \cdot S_{xp}}$$

$$f_{bp}2 = 21366 \quad \text{psi}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Stub Stress:

$$f_{bst} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{st}}{(I_{xp} + I_{st}) \cdot S_{st}}$$

$$f_{bst} = 17454 \quad \text{psi}$$

$$F_{bst} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_{p1} := \max\left(\frac{f_{bp}}{F_{bp}}, \frac{f_{bp}2}{F_{bp}}, \frac{f_{bst}}{F_{bst}}\right)$$

$$Int_{p1} = 0.97$$



$$POSTS := \begin{cases} "OK" & \text{if } Int_{p1} \leq 1 \wedge \frac{\max(\Delta_{xp1}, \Delta_{xp2}, \Delta_{tot})}{\Delta_{allp}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

$$POSTS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: A1 B
		Date: 9/16/11	Rev:
		Chk By:	Date:

$$R_{max} := 250 \quad \text{lb}$$

$$M_{max} := 10875 \quad \text{lb-in} \quad d := 2.5 \quad \text{in (sleeve dia.)}$$

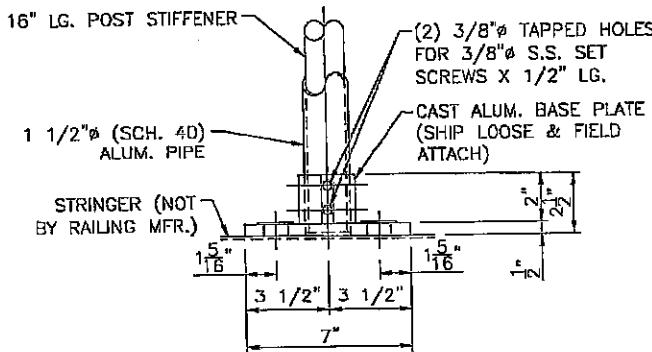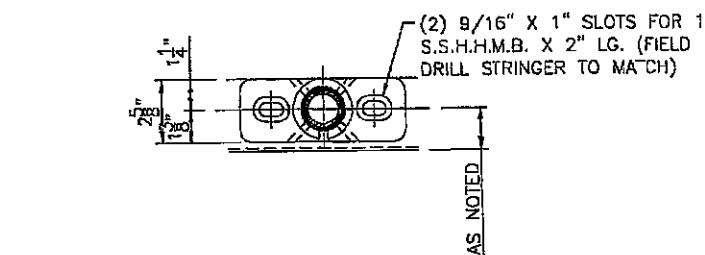

LEVEL STL. LINE POST

BOKD-11C

Chk shear on shoe wall:

$$P := \frac{M_{max}}{0.67 \cdot (2.375)} \quad P = 6834 \quad \text{lb}$$

$$f_y := \frac{(P + R_{max})}{2 \cdot (0.315) \cdot (2)} \quad f_y = 5622 \quad \text{psi}$$

$$F_y := \frac{0.57 \cdot (18000)}{1.65} \quad F_y = 6218 \quad \text{psi}$$

$$I := \frac{f_y}{F_y} \quad I = 0.9 \quad \text{Shear Stress "OK"}$$

Chk Aluminum Base Plate:

$$L1 := 7 \quad \text{in} \quad D1 := 1.3125 \quad \text{in}$$

$$L2 := 2.625 \quad \text{in} \quad D2 := 1.25 \quad \text{in}$$

$$t := 0.563 \quad \text{in}$$

$$L := L1 - (2 \cdot D1) \quad L = 4.38 \quad \text{in}$$

$$P := \frac{M_{max}}{d} \quad P = 4350 \quad \text{lb}$$

$$M_{pl1} := 0.5 \cdot P \cdot 0.9375 \quad M_{pl1} = 2039 \quad \text{in-lb}$$

$$F_y := \frac{1.3 \cdot (18000)}{1.65} \quad F_y = 14182 \quad \text{psi}$$

$$t_{req1} := \sqrt{\frac{M_{pl1} \cdot 6}{F_y \cdot L^2}} \quad t_{req1} = 0.573 \quad \text{in}$$

$$I_2 := \frac{t_{req1}}{t} \quad I_2 = 1.02 \quad 2\% \text{ Over Ok}$$

Chk Bolts to Steel Stringer:

$$V_b := \frac{R_{max}}{2} \quad V_b = 125 \quad \text{lb}$$

$$T_b := \frac{M_{max}}{2 \cdot 1.25} \quad T_b = 4350 \quad \text{lb}$$


$$V_{all} := 0.196 \cdot 23094 \quad V_{all} = 4526 \quad \text{lb}$$

$$T_{all} := 0.142 \cdot 40000 \cdot \frac{0.375}{0.456} \quad T_{all} = 4671 \quad \text{lb}$$

$$I_3 := \left(\frac{V_b}{V_{all}} \right)^2 + \left(\frac{T_b}{T_{all}} \right)^2 \quad I_3 = 0.87$$

Use (2) - 1/2" Dia. S.S. Thru-Bolts
or Drill & Tap w/ 3/8" Min. Thread Engagement
 Condition "CW" - $F_y = 65 \text{ ksi}$

Use Cast Aluminum Base, as shown
 535 casting alloy, $F_u = 35 \text{ ksi min.}$

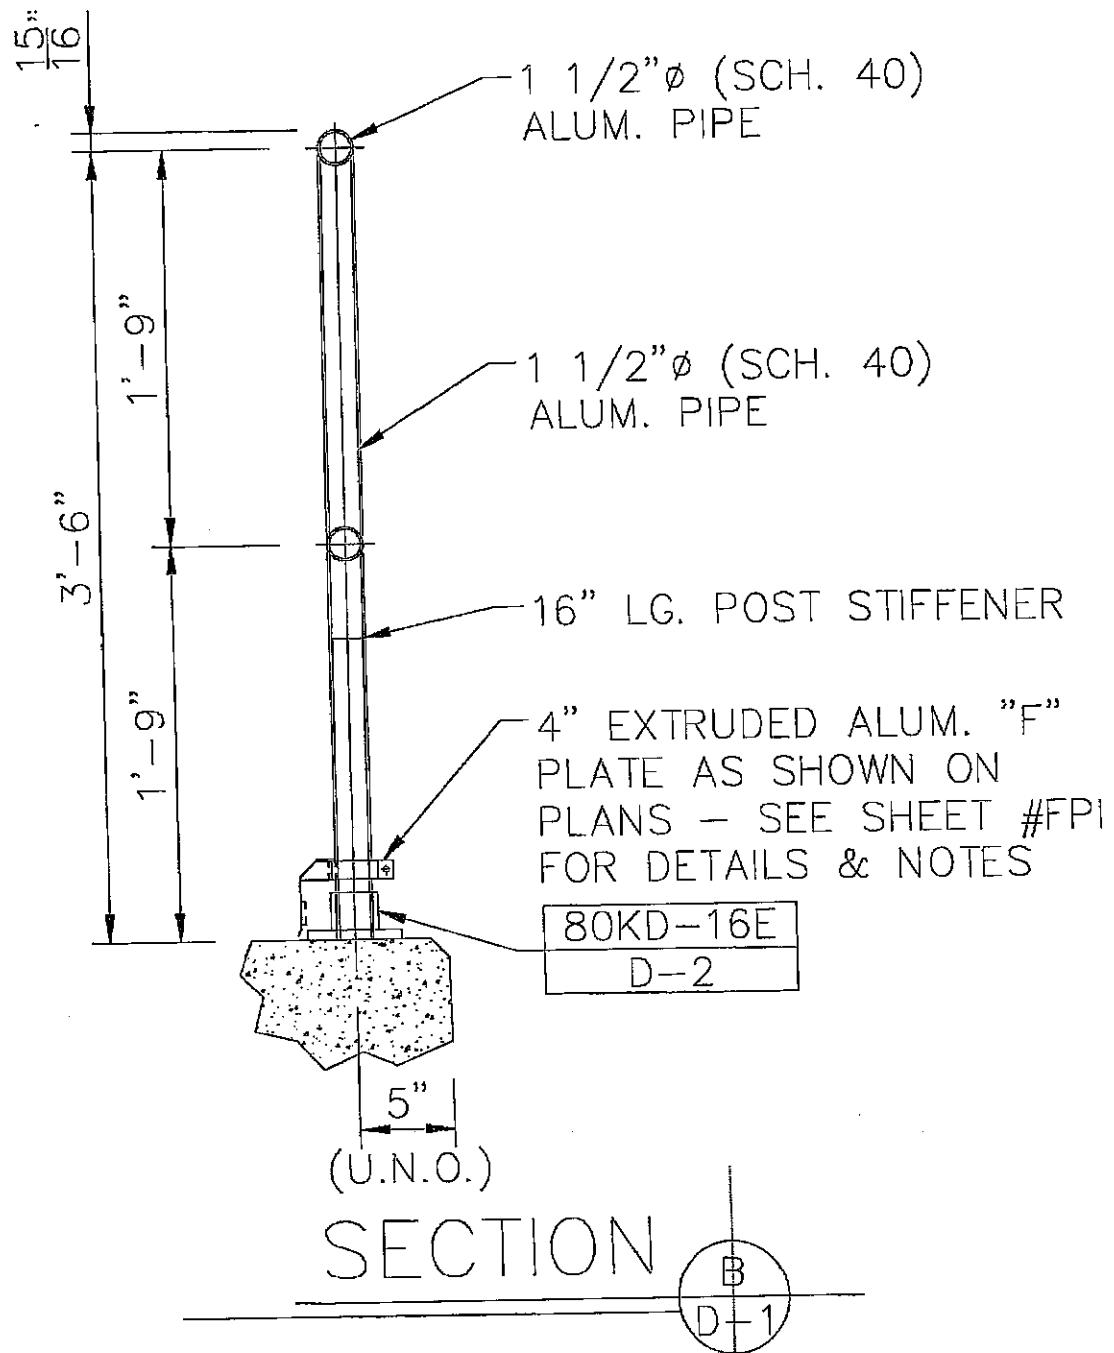

Note: Structural steel, Concrete, CMU and all other anchorage substrates designed by others



ROCKY MOUNTAIN RAILINGS

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 Template: REI-MC-5707	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
			Engineer: JDB Sheet No: B
			Date: 9/16/11 Rev:
			Chk By: Date:

Pipe Railing & Post

These calculations are based on empirical test data
performed by Julius Blum & Co., Inc.

Guardrail "B" Analysis

SHT
B1

Input Variables:

$F_H := 50$	p_{lf}	Load Case 1 (Uniform Load)
$F_V := 0$	p_{lf}	Simultaneous Vertical Uniform Load
$P := 200$	lb	Load Case 2 (Point Load)
$L_{bp} := 20$	in	Unbraced Length of Post
$h := 42$	in	Railing Height
$L := 60$	in	5'-0" MAX POST SPACING

Number of Railing Spans:

- 1 span
- 2 span
- 3 or more spans

Railing Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Railing Temper:


- 6063-T5
- 6063-T6
- 6061-T6 or 6105-T5
- 4/3 increase allowed
- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

Post Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Post Temper:

All calculations below
this line are automatic

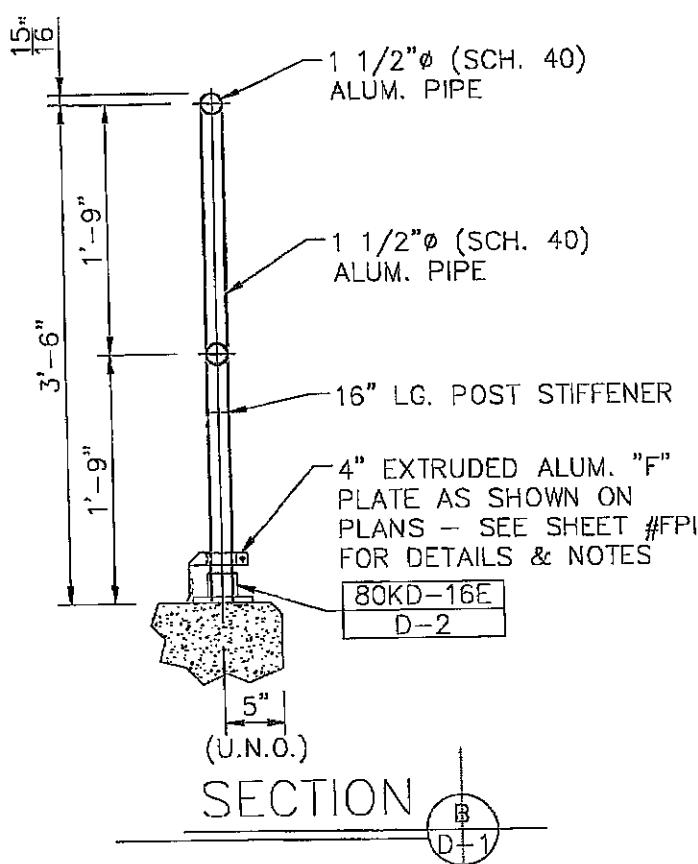

Railing Properties

$I_{xr} =$	0.31
$I_{yr} =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R =$	0.95
$t =$	0.145

Post Properties

$I_{xr} =$	0.31
$I_{yr} =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R_p =$	0.95
$t_p =$	0.145

Computational Factors

$$S_{R1} := \frac{R_p}{t_p} \quad S_{R1} = 6.55 \quad K_1 := (8 \cdot q1) + (8 \cdot q2) + (9.5 \cdot q3) \quad K_1 = 8$$

$$K_2 := (4 \cdot q1) + (5 \cdot q2) + (5 \cdot q3) \quad K_2 = 5$$

$$S_{R3} := \frac{R_p}{t_p} \quad S_{R3} = 6.55 \quad K_3 := (48 \cdot q1) + (66 \cdot q2) + (87 \cdot q3) \quad K_3 = 66$$

$F_t := 10100000$ psi

$$I_{xtotr} := I_{xr} \quad I_{xtotr} = 0.31 \text{ in}^4$$

$$I_{xtotp} := I_{xp} \quad I_{xtotp} = 0.31 \text{ in}^4$$

12" Min. Length AL. Ribbed Tube Stub

$$I_{ytotr} := I_{yr} \quad I_{ytotr} = 0.31 \text{ in}^4$$

$$I_{ytopr} := I_{yp} \quad I_{ytopr} = 0.31 \text{ in}^4$$

$$I_{st} := 0.174 \text{ in}^4 \quad L_{st} := 12 \text{ in}$$

$$S_{st} := 0.224 \text{ in}^3 \quad F_{bst} := 25000 \text{ psi}$$

Railing Analysis:

$$W_h := \frac{F_h}{12}$$

$$W_v := \frac{F_v}{12}$$

Guardrail "B" Analysis

SHT
B1 A**Case 1 Uniform Load:**

$$\Delta_{yr1} := \frac{5 \cdot W_h \cdot L^4}{384 \cdot E_r \cdot I_{yotot}}$$

$$\Delta_{yr1} = 0.225 \quad \text{in} \quad \text{Modeled as a simple span}$$

$$\Delta_{xr1} := \frac{5 \cdot W_v \cdot L^4}{384 \cdot E_r \cdot I_{xotot}}$$

$$\Delta_{xr1} = 0 \quad \text{in}$$

$$\Delta_{allr} := \frac{L}{96}$$

$$\Delta_{allr} = 0.63 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

$$M_{yrmmax} := \frac{W_h \cdot L^2}{K_1}$$

$$M_{yrmmax} = 1875 \quad \text{lb-in}$$

$$M_{xrmmax} := \frac{W_v \cdot L^2}{K_1}$$

$$M_{xrmmax} = 0 \quad \text{lb-in}$$

$$f_{bry1} := \frac{M_{yrmmax}}{S_{yr}}$$

$$f_{bry1} = 5752 \quad \text{psi}$$

$$f_{bxr1} := \frac{M_{xrmmax}}{S_{xr}}$$

$$f_{bxr1} = 0 \quad \text{psi}$$

Case 2 - Point Load:

$$\Delta_{yr2} := \frac{P \cdot L^3}{K_3 \cdot E_r \cdot I_{yotot}}$$

$$\Delta_{yr2} = 0.209 \quad \text{in}$$

$$M_{yrmmax2} := \frac{P \cdot L}{K_2}$$

$$M_{yrmmax2} = 2400 \quad \text{lb-in}$$

$$f_{bry2} := \frac{M_{yrmmax2}}{S_{yr}}$$

$$f_{bry2} = 7362 \quad \text{psi}$$

$$F_{bry} := \begin{cases} (f_{bry1} \cdot 1.33) & \text{if IBC = 1} \\ f_{bry1} & \text{otherwise} \end{cases} \quad F_{bry} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_{r1} := \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \quad Int_{r1} = 0.23$$

$$Int_{r2} := \frac{f_{bry2}}{F_{bry}} \quad Int_{r2} = 0.29$$

$$RAILS := \begin{cases} "OK" & \text{if } \frac{\max(\Delta_{yr1}, \Delta_{xr1}, \Delta_{yr2})}{\Delta_{allr}} \leq 1 \wedge \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \leq 1 \wedge \frac{f_{bry2}}{F_{bry}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases} \quad RAILS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No:	R11-09-01H
			Engineer:	JDB
			Date:	9/16/11
			Rev:	
			Chk By:	Date:

Post Analysis:

$$E_p := E_r$$

$$\Delta_{xp1} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

$$\Delta_{xp2} := \frac{P \cdot 0.85 \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

Guardrail "B" Analysis

SHT
B1 B

$$\Delta_{xp1} = 0.719 \quad \text{in}$$

$$\Delta_{xp2} = 0.489 \quad \text{in}$$

Max Deflection:

$$\Delta_{tot} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}} + \frac{W_h \cdot L \cdot [h^3 - (h - L_{st})^3]}{3 \cdot [(E_p \cdot I_{xp}) + (E_p \cdot I_{st})]}$$

$$\Delta_{tot} = 1.521 \quad \text{in}$$

$$\Delta_{allp} := \frac{h}{12}$$

$$\Delta_{allp} = 3.5 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

Case 1 - Uniform Load:

$$M_{xp} := (W_h \cdot L \cdot h) + W_v \cdot L \cdot \Delta_{tot}$$

$$M_{xpmax} := 0.5 \cdot M_{xp} \cdot q1 + M_{xp} \cdot q2 + M_{xp} \cdot q3$$

$$M_{xpmax} = 10500 \quad \text{lb-in}$$

$$M_{xp2} := W_h \cdot L \cdot (h - L_{st}) + W_v \cdot L \cdot \Delta_{xp1}$$

$$M_{xpmax2} := 0.5 \cdot M_{xp2} \cdot q1 + M_{xp2} \cdot q2 + M_{xp2} \cdot q3$$

$$M_{xpmax2} = 7500 \quad \text{lb-in}$$

Case 2 - Point Load:

$$M_{xpmax4} := P \cdot (h - L_{st}) \cdot 0.85$$

$$M_{xpmax4} = 5100 \quad \text{lb-in}$$

$$M_{xpmax3} := (P \cdot h \cdot 0.85)$$

$$M_{xpmax3} = 7140 \quad \text{lb-in}$$

Max Post Stress:

$$f_{bp} := \frac{\max(M_{xpmax2}, M_{xpmax4})}{S_{xp}}$$

$$f_{bp} = 23006 \quad \text{psi}$$

$$F_{bp} := \begin{cases} (F_{bp} \cdot 1.33) & \text{if IBC = 1} \\ F_{bp} \cdot 1 & \text{otherwise} \end{cases}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Post/Stub Combined Stress:

$$f_{bp} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{xp}}{(I_{xp} + I_{st}) \cdot S_{xp}}$$

$$f_{bp} = 20629 \quad \text{psi}$$

$$f_{bp} = 25000 \quad \text{psi}$$

Max Stub Stress:

$$f_{st} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{st}}{(I_{xp} + I_{st}) \cdot S_{st}}$$

$$f_{st} = 16852 \quad \text{psi}$$

$$f_{st} = 25000 \quad \text{psi}$$

Calculation Results:


$$Int_p1 := \max\left(\frac{f_{bp}}{F_{bp}}, \frac{f_{bp}2}{F_{bp}}, \frac{f_{st}}{F_{st}}\right)$$

$$Int_p1 = 0.92$$

$$POSTS := \begin{cases} "OK" & \text{if } Int_p1 \leq 1 \wedge \frac{\max(\Delta_{xp1}, \Delta_{xp2}, \Delta_{tot})}{\Delta_{allp}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

POSTS = "OK"

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: B1 B
		Date: 9/16/11	Rev:
		Chk By:	Date:

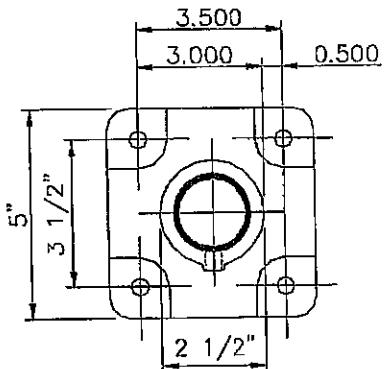

Surface Mount Anchor
Analysis

SHT
B2

$$R_{max} := 250 \text{ lb}$$

$$M_{max} := 10500 \text{ lb-in} \quad d := 2.5 \text{ in (sleeve dia.)}$$

Chk shear on shoe wall:

$$P := \frac{M_{max}}{0.67 \cdot (2.375)} \quad P = 6599 \text{ lb}$$

$$f_y := \frac{(P + R_{max})}{2 \cdot (0.315) \cdot (2)} \quad f_y = 5435 \text{ psi}$$

$$F_y := \frac{0.57 \cdot (18000)}{1.65} \quad F_y = 6218 \text{ psi}$$

$$I := \frac{f_y}{F_y} \quad I = 0.87 \quad \text{Shear Stress "OK"}$$

Chk Anchor Bolts (assume $f_c=4,000 \text{ psi}$ conc.):

$$V_b := \frac{R_{max}}{2} \cdot 1.6 \quad V_b = 200 \text{ lb}$$

$$T_b := \frac{M_{max}}{(L1 - D2) \cdot 0.85 \cdot 1} \cdot 1.6 \quad T_b = 4651 \text{ lb}$$

See Next Sheet for Calculation

Use (4) - 1/2" Dia. S.S. Threaded Rods
With Hilti HIT-RE 500 SD Epoxy Adhesive
Embedment = 4-1/2"
Edge = 3-1/4"
End = 3-1/4"

Chk Aluminum Base Plate:

$$L1 := 5 \text{ in} \quad D1 := 0.75 \text{ in}$$

$$L2 := 5 \text{ in} \quad D2 := 0.75 \text{ in}$$

$$L := L2 - (2 \cdot D2) \quad L = 3.5 \text{ in}$$

$$F_y := \frac{1.3 \cdot (18000)}{1.65} \quad F_y = 14182 \text{ psi}$$

$$P := \frac{M_{max}}{d \cdot 2} \quad P = 2100 \text{ lb}$$

$$M_{pl} := \frac{P \cdot 0.5 \cdot 3^2}{3.5^2} \quad M_{pl} = 771 \text{ in-lb}$$

$$t_{req} := \sqrt{\frac{M_{pl} \cdot 6}{F_y \cdot 5}} \quad t_{req} = 0.255 \text{ in}$$

$$I := \frac{t_{req}}{0.5} \quad I = 0.51 \quad \text{Bending Stress "OK"}$$

Use Cast Aluminum Base, as shown
535 casting alloy, $F_u = 35 \text{ ksi min.}$

www.hilti.us


Company:
Specifier:
Address:
Phone | Fax: - | -
E-Mail:

Page: 1
Project:
Sub-Project | Pos. No.:
Date: 9/16/2011

Specifier's comments:

Input data

Anchor type and diameter: HIT-RE 500-SD + HAS-R 304/316, 1/2
Effective embedment depth: $h_{\text{effect}} = 4.500 \text{ in.}$ ($h_{\text{embed}} = - \text{in.}$)
Material: ASTM F 593
Evaluation Service Report: ESR 2322
Issued | Valid: 4/1/2010 | -
Proof: design method ACI 318 / AC308
Stand-off installation: $e_b = 0.000 \text{ in.}$ (no stand-off); $t = 0.500 \text{ in.}$
Anchor plate: $l_x \times l_y \times t = 3.000 \times 6.000 \times 0.500 \text{ in.}$ (Recommended plate thickness: not calculated)
Profile: no profile
Base material: uncracked concrete , 4000, $f_c' = 4000 \text{ psi}$; $h = 8.000 \text{ in.}$, Temp. short/long: 32/32°F
Installation: hammer drilled hole, installation condition: dry
Reinforcement: tension: condition B, shear: condition B; no supplemental splitting reinforcement present
edge reinforcement: none or < No. 4 bar
Seismic loads (cat. C, D, E, or F): no

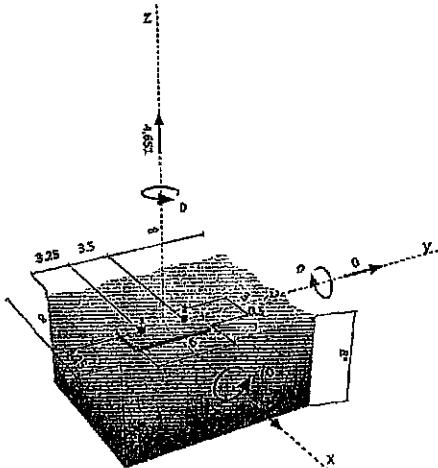
Geometry [in.] & Loading [lb, in.-lb]**Proof I Utilization (Governing Cases)**

Loading	Proof	Design values [lb]		Utilization [%]	
		Load	Capacity	β_w/β_v	Status
Tension	Concrete Breakout Strength	4651	4862	96 / -	OK
Shear	Concrete edge failure in direction x+	200	2924	- / 7	OK
Loading	β_N	β_V	ζ	Utilization $\beta_{NV} [\%]$	Status
Combined tension and shear loads	0.957	0.068	-	85	OK

Warnings

- Please consider all details and hints/warnings given in the detailed report!

Fastening meets the design criteria!

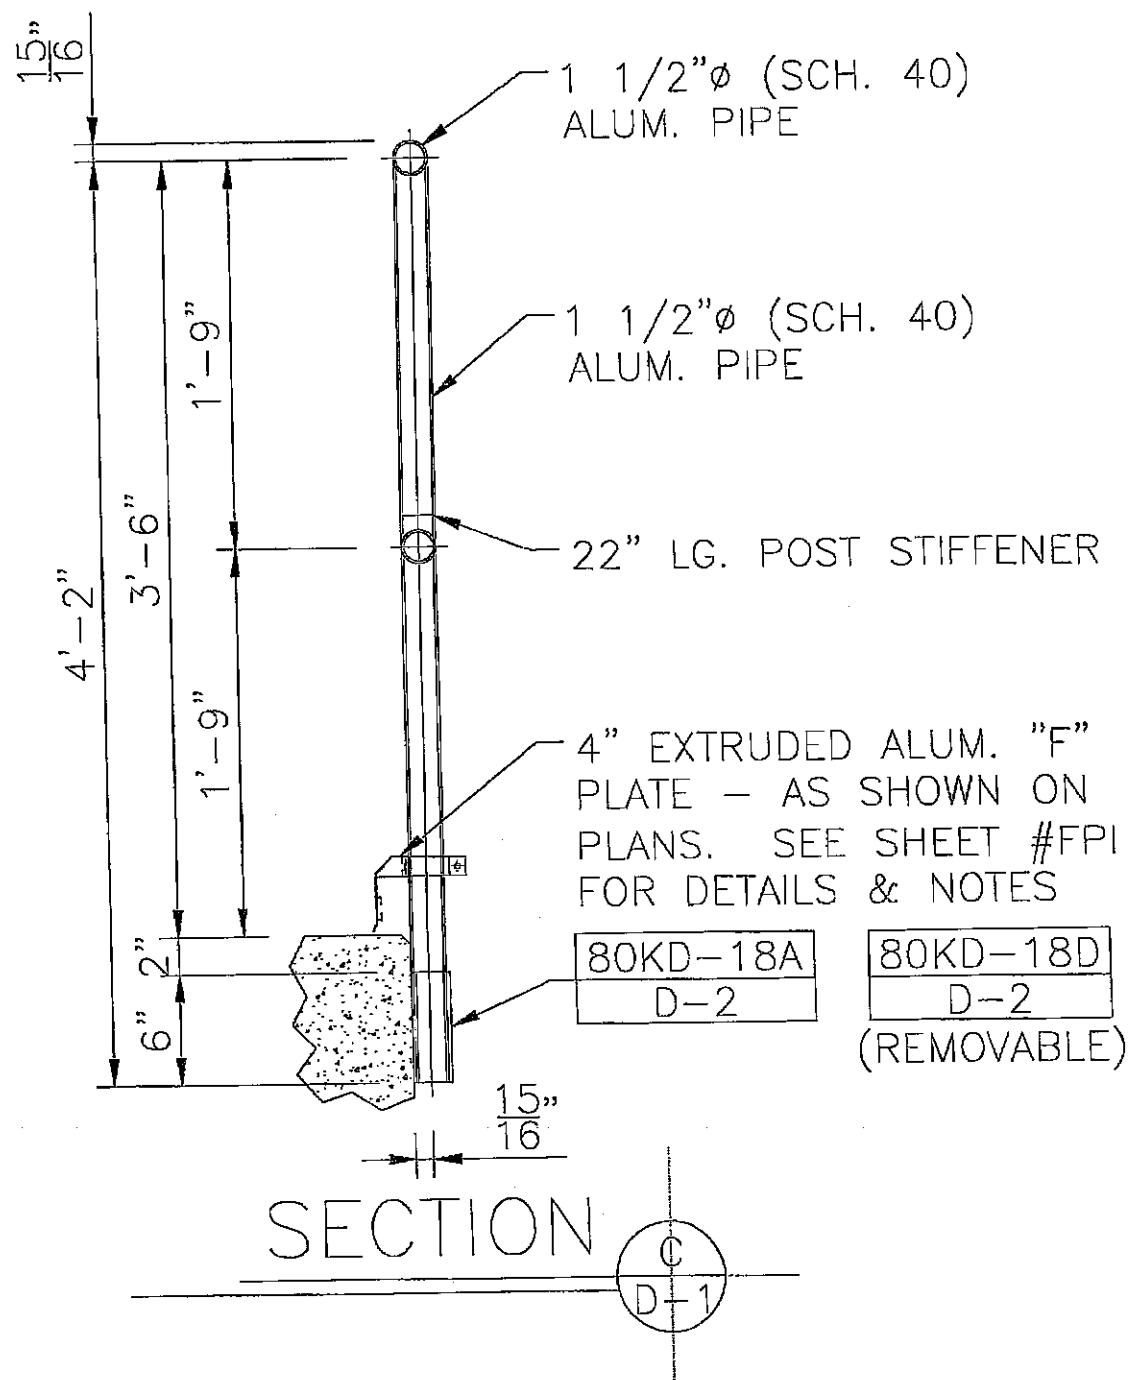

Note: Structural steel, Concrete, CMU and all other anchorage substrates designed by others



ROCKY MOUNTAIN RAILINGS

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: C
		Date: 9/16/11	Rev:
		Chk By:	Date:

Pipe Railing & Post

These calculations are based on empirical test data
performed by Julius Blum & Co., Inc.

Guardrail "C" Analysis

SHT
C1

Input Variables:

$F_H := 50$	plf	Load Case 1 (Uniform Load)
$F_V := 0$	plf	Simultaneous Vertical Uniform Load
$P := 200$	lb	Load Case 2 (Point Load)
$L_{bp} := 26$	in	Unbraced Length of Post
$h := 47$	in	Railing Height
$L := 60$	in	5'-0" MAX POST SPACING

Number of Railing Spans:

- 1 span
- 2 span
- 3 or more spans

Railing Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Railing Temper:


- 6063-T5
- 6063-T6
- 6061-T6 or 6105-T5
- 4/3 increase allowed
- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

Post Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Post Temper:

All calculations below
this line are automatic

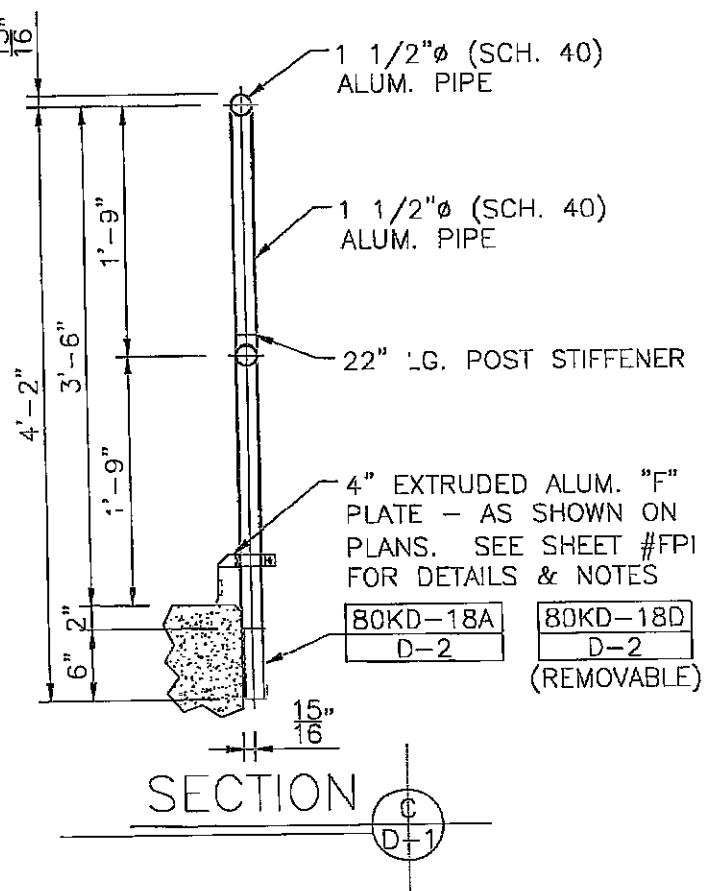

Railing Properties

$I_xr =$	0.31
$I_yr =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R =$	0.95
$t =$	0.145

$$E_r = 10100000 \text{ psi}$$

$$I_{xtotr} := I_{xr} \quad I_{xtotr} = 0.31 \text{ in}^4$$

Post Properties

$I_xr =$	0.31
$I_yr =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R =$	0.95
$t =$	0.145

$$I_{xtotp} := I_{xp} \quad I_{xtotp} = 0.31 \text{ in}^4$$

$$I_{ytotp} := I_{yp} \quad I_{ytotp} = 0.31 \text{ in}^4$$

Computational Factors

$$SR1 := \frac{R_t}{t_f} \quad SR1 = 6.55 \quad K_1 := (8 \cdot q_1) + (8 \cdot q_2) + (9.5 \cdot q_3) \quad K_1 = 8$$

$$K_2 := (4 \cdot q_1) + (5 \cdot q_2) + (5 \cdot q_3) \quad K_2 = 5$$

$$SR3 := \frac{R_p}{t_p} \quad SR3 = 6.55 \quad K_3 := (48 \cdot q_1) + (66 \cdot q_2) + (87 \cdot q_3) \quad K_3 = 66$$

18" Min. Length AL. Ribbed Tube Stub

$$I_{st} := 0.174 \text{ in}^4$$

$$L_{st} := 15 \text{ in}$$

$$S_{st} := 0.224 \text{ in}^3$$

$$F_{bst} := 25000 \text{ psi}$$

Railing Analysis:

$$W_h := \frac{F_h}{12}$$

$$W_v := \frac{F_v}{12}$$

Guardrail "C" Analysis

SHT
C1 A

Case 1 Uniform Load:

$$\Delta_{yr1} := \frac{5 \cdot W_h \cdot L^4}{384 \cdot E_r \cdot I_{tot}}$$

$$\Delta_{yr1} = 0.225 \quad \text{in} \quad \text{Modeled as a simple span}$$

$$\Delta_{xr1} := \frac{5 \cdot W_v \cdot L^4}{384 \cdot E_r \cdot I_{tot}}$$

$$\Delta_{xr1} = 0 \quad \text{in}$$

$$\Delta_{allr} := \frac{L}{96}$$

$$\Delta_{allr} = 0.63 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

$$M_{yrmmax} := \frac{W_h \cdot L^2}{K_1}$$

$$M_{yrmmax} = 1875 \quad \text{lb-in}$$

$$M_{xrmmax} := \frac{W_v \cdot L^2}{K_1}$$

$$M_{xrmmax} = 0 \quad \text{lb-in}$$

$$f_{bry1} := \frac{M_{yrmmax}}{S_{yr}}$$

$$f_{bry1} = 5752 \quad \text{psi}$$

$$f_{bxr1} := \frac{M_{xrmmax}}{S_{xr}}$$

$$f_{bxr1} = 0 \quad \text{psi}$$

Case 2 - Point Load:

$$\Delta_{yr2} := \frac{P \cdot L^3}{K_3 \cdot E_r \cdot I_{tot}}$$

$$\Delta_{yr2} = 0.209 \quad \text{in}$$

$$M_{yrmmax2} := \frac{P \cdot L}{K_2}$$

$$M_{yrmmax2} = 2400 \quad \text{lb-in}$$

$$f_{bry2} := \frac{M_{yrmmax2}}{S_{yr}}$$

$$f_{bry2} = 7362 \quad \text{psi}$$

$$F_{bry} := \begin{cases} (f_{bry1} \cdot 1.33) & \text{if IBC = 1} \\ f_{bry1} & \text{otherwise} \end{cases}$$

$$F_{bry} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_1 := \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \quad Int_1 = 0.23$$

$$Int_2 := \frac{f_{bry2}}{F_{bry}} \quad Int_2 = 0.29$$

$$RAILS := \begin{cases} "OK" & \text{if } \frac{\max(\Delta_{yr1}, \Delta_{xr1}, \Delta_{yr2})}{\Delta_{allr}} \leq 1 \wedge \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \leq 1 \wedge \frac{f_{bry2}}{F_{bry}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases} \quad RAILS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description:	Job No:	R11-09-01H	
		R1843 Austin WTP #4	Engineer:	JDB	
Template: REI-MC-5707			Sheet No:	C1 A	
			Date:	9/16/11	
			Rev:		
			Chk By:	Date:	

Post Analysis:

$$E_p := E_r$$

Guardrail "C" Analysis

SHT
C1 B

$$\Delta_{xp1} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}}$$

$$\Delta_{xp1} = 0.872 \quad \text{in}$$

$$\Delta_{xp2} := \frac{P \cdot 0.85 \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}}$$

$$\Delta_{xp2} = 0.593 \quad \text{in}$$

Max Deflection:

$$\Delta_{tot} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}} + \frac{W_h \cdot L \left[h^3 - (h - L_{st})^3 \right]}{3 \left[(E_p \cdot I_{xp}) + (E_p \cdot I_{st}) \right]}$$

$$\Delta_{tot} = 2.083 \quad \text{in}$$

$$\Delta_{allp} := \frac{h}{12}$$

$$\Delta_{allp} = 3.92 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

Case 1 - Uniform Load:

$$M_{xp} := (W_h \cdot L \cdot h) + W_v \cdot L \cdot \Delta_{tot}$$

$$M_{xpmax} := 0.5 \cdot M_{xp} \cdot q_1 + M_{xp} \cdot q_2 + M_{xp} \cdot q_3$$

$$M_{xpmax} = 11750 \quad \text{lb-in}$$

$$M_{xp2} := W_h \cdot L \cdot (h - L_{st}) + W_v \cdot L \cdot \Delta_{xp1}$$

$$M_{xpmax2} := 0.5 \cdot M_{xp2} \cdot q_1 + M_{xp2} \cdot q_2 + M_{xp2} \cdot q_3$$

$$M_{xpmax2} = 8000 \quad \text{lb-in}$$

Case 2 - Point Load:

$$M_{xpmax4} := P \cdot (h - L_{st}) \cdot 0.85$$

$$M_{xpmax4} = 5440 \quad \text{lb-in}$$

$$M_{xpmax3} := (P \cdot h \cdot 0.85)$$

$$M_{xpmax3} = 7990 \quad \text{lb-in}$$

Max Post Stress:

$$f_{bp} := \frac{\max(M_{xpmax2}, M_{xpmax4})}{S_{xp}}$$

$$f_{bp} = 24540 \quad \text{psi}$$

$$F_{bp} := \begin{cases} (F_{bp} \cdot 1.33) & \text{if TBC = 1} \\ F_{bp} & \text{otherwise} \end{cases}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Post/Stub Combined Stress:

$$f_{bp}2 := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{xp}}{(I_{xp} + I_{st}) \cdot S_{xp}}$$

$$f_{bp}2 = 23085 \quad \text{psi}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Stub Stress:

$$f_{bst} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{st}}{(I_{xp} + I_{st}) \cdot S_{st}}$$

$$f_{bst} = 18858 \quad \text{psi}$$

$$F_{bst} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_{p1} := \max\left(\frac{f_{bp}}{F_{bp}}, \frac{f_{bp}2}{F_{bp}}, \frac{f_{bst}}{F_{bst}}\right)$$


$$Int_{p1} = 0.98$$

$$POSTS := \begin{cases} "OK" & \text{if } Int_{p1} \leq 1 \wedge \frac{\max(\Delta_{xp1}, \Delta_{xp2}, \Delta_{tot})}{\Delta_{allp}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

$$POSTS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: C1 B
		Date: 9/16/11	Rev:
		Chk By:	Date:

Side Mount Anchorage	SHT C2
----------------------	--------

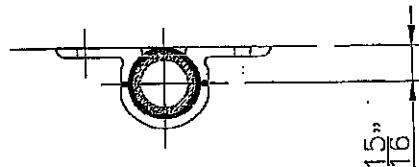


$$R_{max} := 250 \text{ lb}$$

$$M_{max} := 11750 \text{ lb-in}$$

$$L1 := 6 \text{ in}$$

$$L2 := 5.25 \text{ in}$$

Chk Extruded Aluminum Bracket:

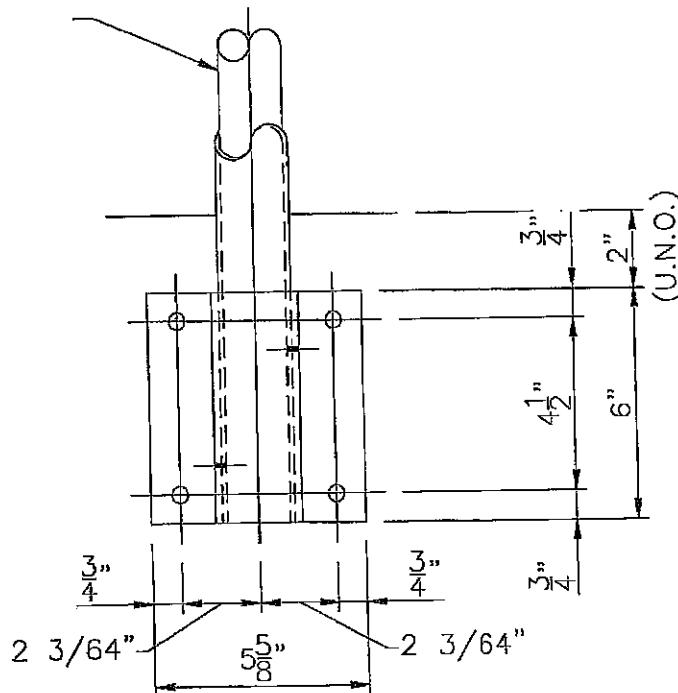

$$P := \frac{M_{max}}{L1} + R_{max} \quad P = 2208 \text{ lb}$$

$$M_{pl} := \frac{P}{2} \cdot 0.688 \quad M_{pl} = 760 \text{ in-lb}$$

$$t_{req} := \sqrt{\frac{6 \cdot M_{pl}}{28000 \cdot L1 \cdot 0.85}} \quad t_{req} = 0.18 \text{ in}$$

$$I := \frac{t_{req}}{0.25} \quad I = 0.71$$

**Use Side Mount Bracket, As Shown
6105-T5 alloy**

Chk Anchor Bolts: (Assume $f_c = 4000 \text{ psi Conc.}$)

$$V_b := \frac{R_{max}}{2} \cdot 1.6 \quad V_b = 200 \text{ lb}$$

$$T_b := \left(\frac{M_{max}}{L2 \cdot 1.05} + \frac{R_{max}}{2} \right) \cdot 1.6 \quad T_b = 4413 \text{ lb}$$

See Next Sheet for Calculation

Chk TEK Screws:

$$V := \frac{R_{max}}{(2)} \quad V = 125 \text{ lb}$$

$$V_{all} := 2148 \cdot 0.333 \quad V_{all} = 715 \text{ lb}$$

$$I_2 := \left(\frac{V}{V_{all}} \right) \quad I_2 = 0.17 < 1.0$$


**Use (4) - 1/2" Dia. S.S. Threaded Rods
With Hilti HIT-RE 500 Epoxy Adhesive
Embedment = 4-1/2"
Edge = 2-3/4"
End = 3"**

**Use (4) - 1/2" Dia. S.S. Threaded Rods
With Hilti HIT-RE 500 Epoxy Adhesive
Embedment = 4-1/2"
Edge = 2-3/4"
End = 3"**

**Use (2) - #17 S.S. TEK Screws
300 Series S.S.**

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5741		Engineer: JDB	Sheet No: C2
		Date: 9/16/11	Rev:
		Chk By:	Date:

Side Mount Anchorage	SHT C3
-------------------------	-----------

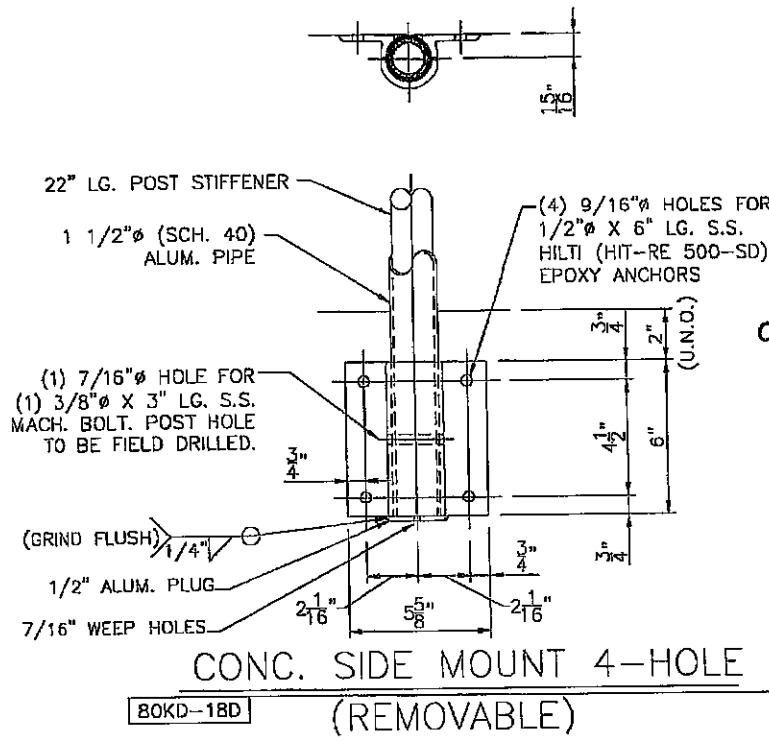

$$R_{\max} := 250 \text{ lb}$$

$$M_{\max} := 11750 \text{ lb-in}$$

$$L1 := 6 \text{ in}$$

$$L2 := 5.25 \text{ in}$$

Chk Extruded Aluminum Bracket:

$$P := \frac{M_{\max}}{L1} + R_{\max} \quad P = 2208 \text{ lb}$$

$$M_{pl} := \frac{P}{2} - 0.688 \quad M_{pl} = 760 \text{ in-lb}$$

$$t_{req} := \sqrt{\frac{6 \cdot M_{pl}}{28000 \cdot L1 \cdot 0.85}} \quad t_{req} = 0.18 \text{ in}$$

$$I := \frac{t_{req}}{0.25} \quad I = 0.71$$

Use Side Mount Bracket, As Shown
6105-T5 alloy

Chk Anchor Bolts: (Assume $f_c = 4000 \text{ psi Conc.}$)

$$V_b := \frac{R_{\max}}{2} \cdot 1.6 \quad V_b = 200 \text{ lb}$$

$$T_b := \left(\frac{M_{\max}}{L2 \cdot 1 \cdot 0.85} + \frac{R_{\max}}{2} \right) \cdot 1.6 \quad T_b = 4413 \text{ lb}$$

Chk Thru-Bolt:

$$V := \frac{R_{\max}}{(1)} \quad V = 250 \text{ lb}$$

$$V_{all} := 1614 \quad V_{all} = 1614 \text{ lb}$$

See Next Sheet for Calculation

$$I_2 := \left(\frac{V}{V_{all}} \right) \quad I_2 = 0.15 < 1.0$$

Use (4) - 1/2" Dia. S.S. Threaded Rods
With Hilti HIT-RE 500 Epoxy Adhesive
Embedment = 4-1/2"
Edge = 2-3/4"
End = 3"

Use (1) - 3/8" Dia. S.S. Thru-Bolt
300 Series S.S.

www.hilti.us


Company:
Specifier:
Address:
Phone / Fax: - | -
E-Mail:

Page: 1
Project:
Sub-Project / Pos. No.:
Date: 9/16/2011

Specifier's comments:

Input data

Anchor type and diameter: HIT-RE 500-SD + HAS-R 304/316, 1/2
Effective embedment depth: $h_{\text{e,eff}} = 4.500$ in. ($h_{\text{e,min}} = -$ in.)
Material: ASTM F 593
Evaluation Service Report: ESR 2322
Issued / Valid: 4/1/2010 | -
Proof: design method ACI 318 / AC308
Stand-off installation: $e_b = 0.000$ in. (no stand-off); $t = 0.500$ in.
Anchor plate: $l_x \times l_y \times t = 3.000 \times 6.000 \times 0.500$ in. (Recommended plate thickness: not calculated)
Profile: no profile
Base material: uncracked concrete , 4000, $f'_c = 4000$ psi; $h = 8.000$ in., Temp. short/long: 32/32°F
Installation: hammer drilled hole, installation condition: dry
Reinforcement: tension: condition B, shear: condition B; no supplemental splitting reinforcement present
Seismic loads (cat. C, D, E, or F): no

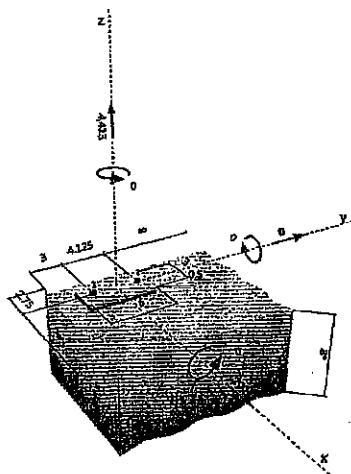Geometry [in.] & Loading [lb, in.-lb]**Proof I Utilization (Governing Cases)**


Loading	Proof	Design values [lb]		Utilization [%]	
		Load	Capacity	β_N/β_V	Status
Tension	Concrete Breakout Strength	4413	4623	95 / -	OK
Shear	Concrete edge failure in direction y-	200	3893	- / 5	OK
Loading	β_N	β_V	ζ	Utilization $\beta_{N,V}[\%]$	Status
Combined tension and shear loads	0.955	0.051	-	84	OK

Warnings

- Please consider all details and hints/warnings given in the detailed report!

Fastening meets the design criteria!

Side Mount Anchorage	SHT C4
-------------------------	-----------

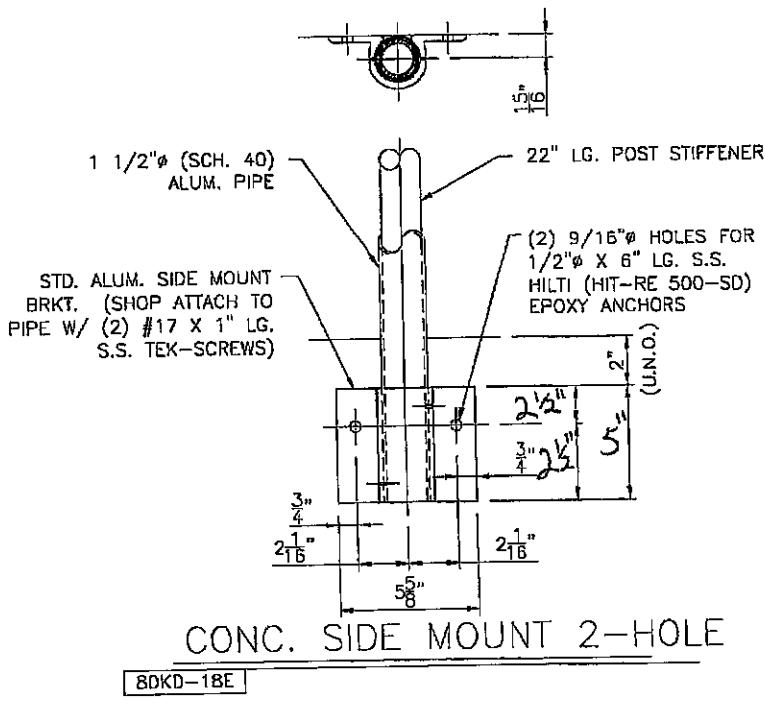

$$R_{\max} := 170 \text{ lb}$$

$$M_{\max} := R_{\max} \cdot 47 = 7990 \text{ lb-in}$$

$$L1 := 5 \text{ in}$$

$$L2 := 2.5 \text{ in}$$

Chk Extruded Aluminum Bracket:

$$P := \frac{M_{\max}}{L1} + R_{\max} \quad P = 1768 \text{ lb}$$

$$M_{pl} := \frac{P}{2} \cdot 0.688 \quad M_{pl} = 608 \text{ in-lb}$$

$$t_{req} := \sqrt{\frac{6 \cdot M_{pl}}{28000 \cdot L1 \cdot 0.85}} \quad t_{req} = 0.18 \text{ in}$$

$$I := \frac{t_{req}}{0.25} \quad I = 0.7$$

Use Side Mount Bracket, As Shown
6105-T5 alloy

Chk Anchor Bolts: (Assume $f_c = 4000 \text{ psi Conc.}$)

$$V_b := \frac{R_{\max}}{1} \cdot 1.6 \quad V_b = 272 \text{ lb}$$

$$T_b := \left(\frac{M_{\max}}{L2 \cdot 1 - 0.85} + \frac{R_{\max}}{1} \right) \cdot 1.6 \quad T_b = 6288 \text{ lb}$$

See Next Sheet for Calculation

Use (2) - 1/2" Dia. S.S. Threaded Rods

With Hilti HIT-RE 500 Epoxy Adhesive
Embedment = 4-1/2"
Edge = 4-1/2"
End = 4-1/8"

Chk TEK Screws:

$$V := \frac{R_{\max}}{(2)} \quad V = 85 \text{ lb}$$

$$V_{all} := 2148 \cdot 0.333 \quad V_{all} = 715 \text{ lb}$$

$$I_2 := \left(\frac{V}{V_{all}} \right) \quad I_2 = 0.12 < 1.0$$

Use (2) - #17 S.S. TEK Screws
300 Series S.S.


Company:
Specifier:
Address:
Phone | Fax: - | -
E-Mail:

Page: 1
Project:
Sub-Project | Pos. No.:
Date: 9/16/2011

Specifier's comments:

Input data

Anchor type and diameter: HIT-RE 500-SD + HAS-R 304/316, 1/2
Effective embedment depth: $h_{\text{embed}} = 4.500 \text{ in.}$ ($h_{\text{embed,req}} = - \text{in.}$)
Material: ASTM F 593
Evaluation Service Report: ESR 2322
Issued | Valid: 4/1/2010 | -
Proof: -
Stand-off installation: $e_s = 0.000 \text{ in.}$ (no stand-off); $t = 0.500 \text{ in.}$
Anchor plate: $\{ \times \} \times t = 3.000 \times 6.000 \times 0.500 \text{ in.}$ (Recommended plate thickness; not calculated)
Profile: no profile
Base material: uncracked concrete, 4000, $f'_c = 4000 \text{ psi}$; $h = 8.000 \text{ in.}$, Temp. short/long: 32/32°F
Installation: hammer drilled hole, installation condition: dry
Reinforcement: tension: condition B, shear: condition B; no supplemental splitting reinforcement present
edge reinforcement: none or < No. 4 bar
Seismic loads (cat. C, D, E, or F): no

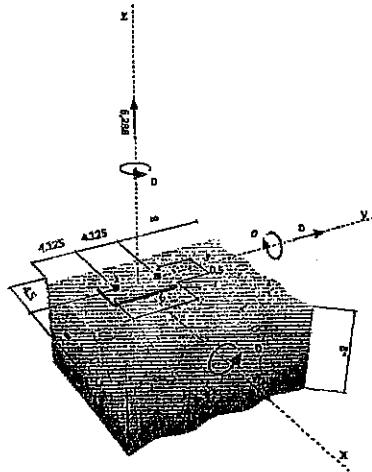
Geometry [in.] & Loading [lb, in.-lb]**Proof | Utilization (Governing Cases)**

Loading	Proof	Design values [lb]		Utilization [%]	
		Load	Capacity	β_u/β_v	Status
Tension	Concrete Breakout Strength	6288	6358	99 / -	OK
Shear	Concrete edge failure in direction y-	200	6729	- / 3	OK
Loading	β_u	β_v	ζ	Utilization $\beta_{uv}[\%]$	Status
Combined tension and shear loads	0.989	0.030	-	85	OK

Warnings

- * Please consider all details and hints/warnings given in the detailed report!

Fastening meets the design criteria!

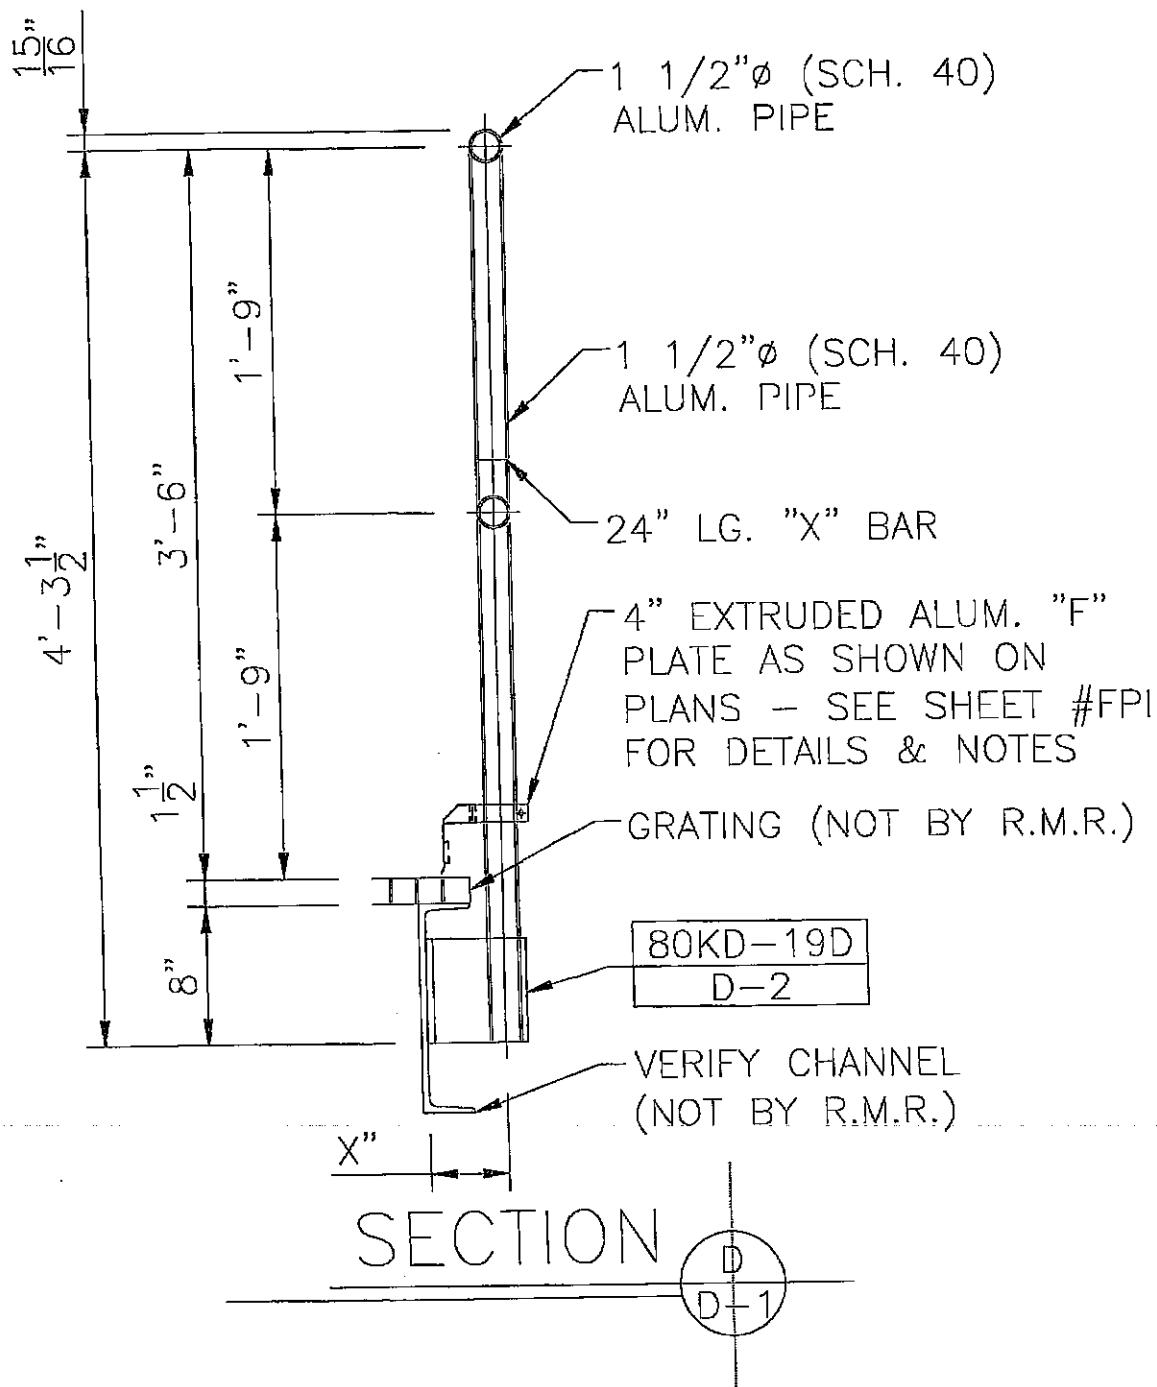

Note: Structural steel, Concrete, CMU and all other anchorage substrates designed by others



ROCKY MOUNTAIN RAILINGS

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707			Engineer: JDB Sheet No: D
			Date: 9/16/11 Rev:
			Chk By: Date:

Pipe Railing & Post

These calculations are based on empirical test data performed by Julius Blum & Co., Inc.

Guardrail "D" Analysis

SHT
D1

Input Variables:

$F_H := 50$	plf	Load Case 1 (Uniform Load)
$F_V := 0$	plf	Simultaneous Vertical Uniform Load
$P := 200$	lb	Load Case 2 (Point Load)
$L_{bp} := 30.5$	in	Unbraced Length of Post
$h := 48.5$	in	Railing Height
$L := 60$	in	5'-0" MAX POST SPACING

Number of Railing Spans:

- 1 span
- 2 span
- 3 or more spans

Railing Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Railing Temper:


- 6063-T5
- 6063-T6
- 6061-T6 or 6105-T5
- 4/3 increase allowed
- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

Post Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Post Temper:

- 6063-T6
- 6005-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

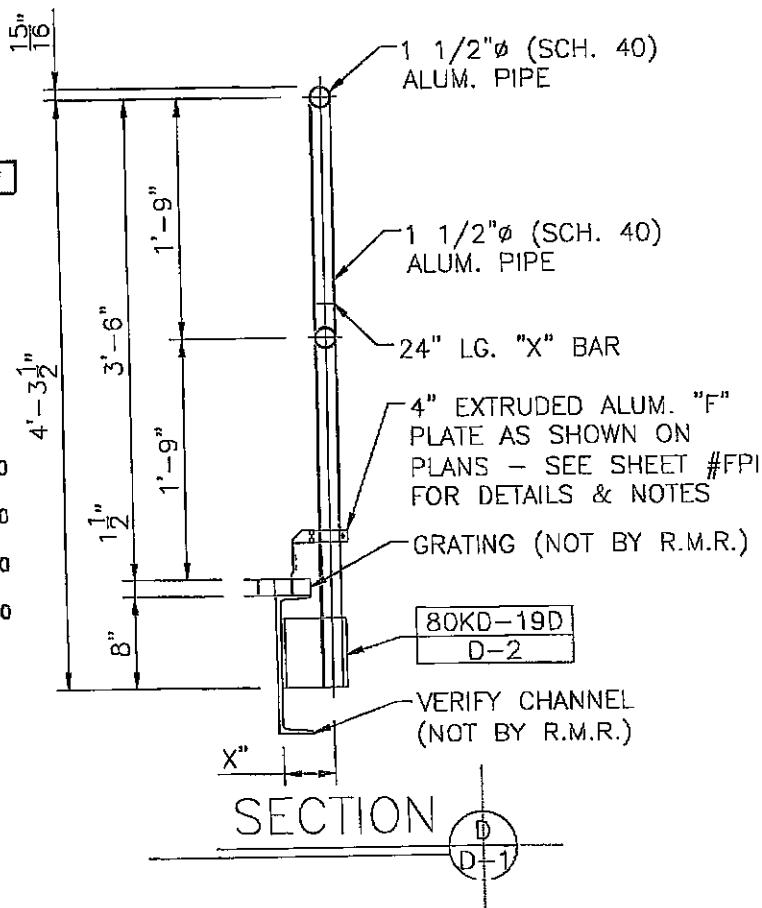

All calculations below this line are automatic

Railing Properties

$I_xr =$	0.31
$I_yr =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R_r =$	0.95
$t_r =$	0.145

Post Properties

$I_{xtr} =$	0.31
$I_{ytr} =$	0.31
$S_{xtr} =$	0.326
$S_{ytr} =$	0.326
$R_t =$	0.95
$t_p =$	0.145

Computational Factors

$S_{R1} := \frac{R_r}{t_r}$	$S_{R1} = 6.55$	$K_1 := (8 \cdot q1) + (8 \cdot q2) + (9.5 \cdot q3)$	$K_1 = 8$
$S_{R3} := \frac{R_p}{t_p}$	$S_{R3} = 6.55$	$K_2 := (4 \cdot q1) + (5 \cdot q2) + (5 \cdot q3)$	$K_2 = 5$
		$K_3 := (48 \cdot q1) + (66 \cdot q2) + (87 \cdot q3)$	$K_3 = 66$

$E_r := 10100000$ psi

$$I_{xtotr} := I_{xr} \quad I_{xtotr} = 0.31 \text{ in}^4$$

$$I_{ytotr} := I_{yr} \quad I_{ytotr} = 0.31 \text{ in}^4$$

$$I_{xtotp} := I_{xp} \quad I_{xtotp} = 0.31 \text{ in}^4$$

$$I_{ytotp} := I_{yp} \quad I_{ytotp} = 0.31 \text{ in}^4$$

19" Min. Length AL. Ribbed Tube Stub

$$I_{st} := 0.249 \text{ in}^4$$

$$S_{st} := 0.249 \text{ in}^3$$

$$L_{st} := 16 \text{ in}$$

$$F_{bst} := 25000 \text{ psi}$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: D1
		Date: 9/16/11	Rev:
		Chk By:	Date:

Railing Analysis:

$$W_h := \frac{F_h}{12}$$

$$W_v := \frac{F_v}{12}$$

Guardrail "D" Analysis

SHT
D1 A

Case 1 Uniform Load:

$$\Delta_{yr1} := \frac{5 \cdot W_h \cdot L^4}{384 \cdot E_r \cdot I_{ytotr}}$$

$$\Delta_{yr1} = 0.225 \quad \text{in} \quad \text{Modeled as a simple span}$$

$$\Delta_{xr1} := \frac{5 \cdot W_v \cdot L^4}{384 \cdot E_r \cdot I_{xtotr}}$$

$$\Delta_{xr1} = 0 \quad \text{in}$$

$$\Delta_{allr} := \frac{L}{96}$$

$$\Delta_{allr} = 0.63 \quad \text{in} \quad \text{Per ASTM Specification E985}$$

$$M_{yrmmax} := \frac{W_h \cdot L^2}{K_1}$$

$$M_{yrmmax} = 1875 \quad \text{lb-in}$$

$$M_{xrmmax} := \frac{W_v \cdot L^2}{K_1}$$

$$M_{xrmmax} = 0 \quad \text{lb-in}$$

$$f_{bry1} := \frac{M_{yrmmax}}{S_{yr}}$$

$$f_{bry1} = 5752 \quad \text{psi}$$

$$f_{bxr1} := \frac{M_{xrmmax}}{S_{xr}}$$

$$f_{bxr1} = 0 \quad \text{psi}$$

Case 2 - Point Load:

$$\Delta_{yr2} := \frac{P \cdot L^3}{K_3 \cdot E_r \cdot I_{ytotr}}$$

$$\Delta_{yr2} = 0.209 \quad \text{in}$$

$$M_{yrmmax2} := \frac{P \cdot L}{K_2}$$

$$M_{yrmmax2} = 2400 \quad \text{lb-in}$$

$$f_{bry2} := \frac{M_{yrmmax2}}{S_{yr}}$$

$$f_{bry2} = 7362 \quad \text{psi}$$

$$F_{bry} := \begin{cases} (f_{bry1} \cdot 1.33) & \text{if IBC = 1} \\ f_{bry1} & \text{otherwise} \end{cases} \quad F_{bry} = 25000 \quad \text{psi}$$

Calculation Results:

$$Int_{r1} := \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \quad Int_{r1} = 0.23$$

$$Int_{r2} := \frac{f_{bry2}}{F_{bry}} \quad Int_{r2} = 0.29$$

$$RAILS := \begin{cases} "OK" & \text{if } \frac{\max(\Delta_{yr1}, \Delta_{xr1}, \Delta_{yr2})}{\Delta_{allr}} \leq 1 \wedge \left(\frac{f_{bxr1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \leq 1 \wedge \frac{f_{bry2}}{F_{bry}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases} \quad RAILS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: D1 A
		Date: 9/16/11	Rev:
		Chk By:	Date:

Post Analysis:

$$E_p := E_t$$

Guardrail "D" Analysis

SHT
D1 B

$$\Delta_{xp1} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}}$$

$$\Delta_{xp1} = 0.914 \text{ in}$$

$$\Delta_{xp2} := \frac{P \cdot 0.85 \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}}$$

$$\Delta_{xp2} = 0.621 \text{ in}$$

Max Deflection:

$$\Delta_{tot} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}} + \frac{W_h \cdot L \cdot [h^3 - (h - L_{st})^3]}{3 \cdot [(E_p \cdot I_{xp}) + (E_p \cdot I_{st})]}$$

$$\Delta_{tot} = 2.091 \text{ in}$$

$$\Delta_{allp} := \frac{h}{12}$$

$$\Delta_{allp} = 4.04 \text{ in} \quad \text{Per ASTM Specification E985}$$

Case 1 - Uniform Load:

$$M_{xp} := (W_h \cdot L \cdot h) + W_v \cdot L \cdot \Delta_{tot}$$

$$M_{xpmax} := 0.5 \cdot M_{xp} \cdot q_1 + M_{xp} \cdot q_2 + M_{xp} \cdot q_3$$

$$M_{xpmax} = 12125 \text{ lb-in}$$

$$M_{xp2} := W_h \cdot L \cdot (h - L_{st}) + W_v \cdot L \cdot \Delta_{xp1}$$

$$M_{xpmax2} := 0.5 \cdot M_{xp2} \cdot q_1 + M_{xp2} \cdot q_2 + M_{xp2} \cdot q_3$$

$$M_{xpmax2} = 8125 \text{ lb-in}$$

Case 2 - Point Load:

$$M_{xpmax4} := P \cdot (h - L_{st}) \cdot 0.85$$

$$M_{xpmax4} = 5525 \text{ lb-in}$$

$$M_{xpmax3} := (P \cdot h \cdot 0.85)$$

$$M_{xpmax3} = 8245 \text{ lb-in}$$

Max Post Stress:

$$f_{bp} := \frac{\max(M_{xpmax2}, M_{xpmax3})}{S_{xp}}$$

$$f_{bp} = 24923 \text{ psi}$$

$$F_{bp} := \begin{cases} (F_{bp} \cdot 1.33) & \text{if IBC = 1} \\ F_{bp} \cdot 1 & \text{otherwise} \end{cases}$$

$$F_{bp} = 25000 \text{ psi}$$

Max Post/Stub Combined Stress:

$$f_{bp}2 := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{xp}}{(I_{xp} + I_{st}) \cdot S_{xp}}$$

$$f_{bp}2 \approx 20626 \text{ psi}$$

$$F_{bp} = 25000 \text{ psi}$$

Max Stub Stress:

$$f_{bst} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{st}}{(I_{xp} + I_{st}) \cdot S_{st}}$$

$$f_{bst} = 21691 \text{ psi}$$

$$F_{bst} = 25000 \text{ psi}$$

Calculation Results:


$$Int_{p1} := \max\left(\frac{f_{bp}}{F_{bp}}, \frac{f_{bp}2}{F_{bp}}, \frac{f_{bst}}{F_{bst}}\right)$$

$$Int_{p1} = 1$$

$$POSTS := \begin{cases} "OK" & \text{if } Int_{p1} \leq 1 \wedge \frac{\max(\Delta_{xp1}, \Delta_{xp2}, \Delta_{tot})}{\Delta_{allp}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

$$POSTS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No:	R11-09-01H	
			Engineer:	JDB	Sheet No:
			Date:	9/16/11	Rev:
			Chk By:		Date:

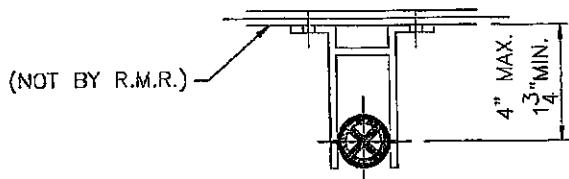


Side Mount Anchorage	SHT D2
----------------------	--------

$R_{max} := 250$ lb

$M_{max} := 12125$ lb-in

$L1 := 6$ in

$L2 := 5$ in

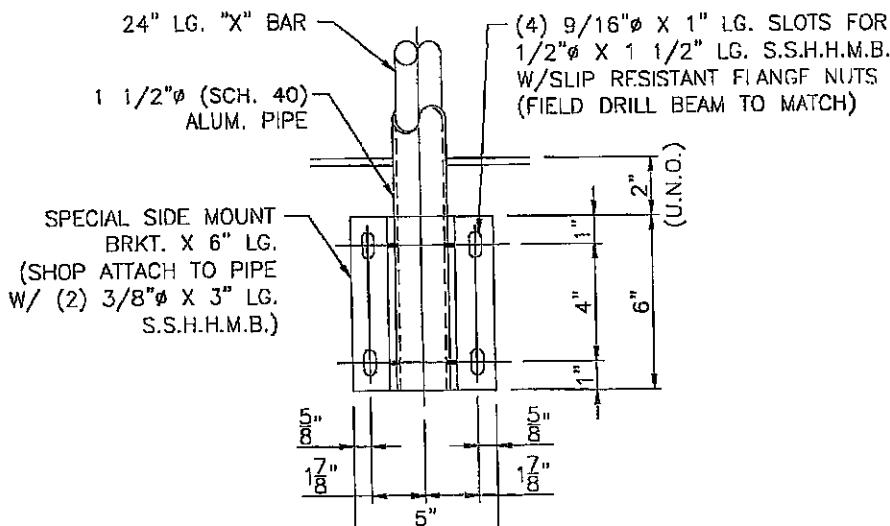

SPECIAL SIDE MOUNT 4-HOLE

[80KD-19D]

Chk Post Attachment to Bracket:

$$V := \frac{M_{max}}{4 \cdot (1)} + \frac{R_{max}}{(2)}$$

$$V = 3156 \text{ lb}$$

$$V_{all} = 0.110 \cdot 23000 \cdot (2)$$

$$V_{all} = 5060 \text{ lb}$$

Chk Anchor Bolts:

$$V_b := \frac{R_{max}}{4}$$

$$V_b = 63 \text{ lb}$$

$$T_b := \frac{M_{max}}{L2 \cdot 2} + \frac{R_{max}}{4}$$

$$T_b = 1275 \text{ lb}$$

$$V_{all} := 0.196 \cdot 23000$$

$$V_{all} = 4508 \text{ lb}$$

$$T_{all} := 0.142 \cdot 40000 \cdot \frac{0.1875}{0.456}$$

$$T_{all} = 2336 \text{ lb}$$

$$I := \left(\frac{V_b}{V_{all}} \right)^2 + \left(\frac{T_b}{T_{all}} \right)^2$$

$$I = 0.3 < 1.0$$

$$t_{req} := \sqrt{\frac{6 \cdot M_{pl}}{28000 \cdot L1 \cdot 0.85}}$$

$$t_{req} = 0.2 \text{ in}$$

$$I := \frac{t_{req}}{0.25}$$

$$I = 0.79$$

Use (4) - 1/2" Dia. S.S. Thru Bolts

(or Drill & Tap - 3/16" Min. Thread Engagement)

Cond "CW", $F_y = 65$ ksi minimum
Steel Stringers Designed By Others

Use Side Mount Bracket, As Shown
6105-T5 alloy

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5741		Engineer: JDB	Sheet No: D2
		Date: 9/16/11	Rev:
		Chk By:	Date:

Pipe Railing & Post

These calculations are based on empirical test data performed by Julius Blum & Co., Inc.

Guardrail "K" Analysis

SHT
K1


Input Variables:

$F_H := 50$	plf	Load Case 1 (Uniform Load)
$F_V := 0$	plf	Simultaneous Vertical Uniform Load
$P := 200$	lb	Load Case 2 (Point Load)
$L_{bp} := 14$	in	Unbraced Length of Post
$h := 42$	in	Railing Height
$L := 53$	in	4'-5" MAX POST SPACING

*

Number of Railing Spans:

- 1 span
- 2 span
- 3 or more spans

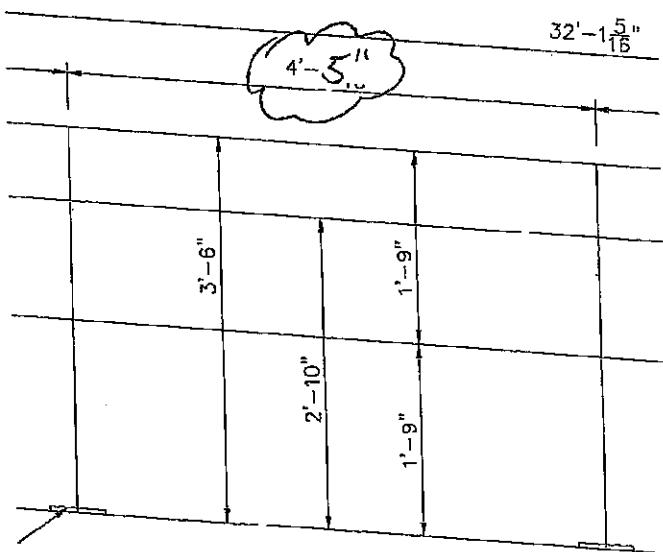

Railing Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Post Section:

- 1 1/4" Schd. 40
- 1 1/4" Schd. 80
- 1 1/2" Schd. 40
- 1 1/2" Schd. 80
- 1 1/2" tube
- 2" Schd. 40
- 2" Schd. 80

Railing Temp:

- 6063-T5
- 6063-T6
- 6061-T6 or 6105-T5
- 4/3 increase allowed

Post Temp:

- 6063-T6
- 6006-T5
- 6061-T6 or 6105-T5
- Post Welded to Base Plate

All calculations below this line are automatic

Railing Properties

$I_{xr} =$	0.31
$I_{yr} =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326
$R =$	0.95
$t =$	0.145

Post Properties

$I_{xr} =$	0.31
$I_{yr} =$	0.31
$S_{xr} =$	0.326
$S_{yr} =$	0.326

Computational Factors

$S_{R1} := \frac{R_x}{t_x}$	$S_{R1} = 6.55$	$K_1 := (8 \cdot q1) + (8 \cdot q2) + (9.5 \cdot q3)$	$K_1 = 8$
$S_{R2} := \frac{R_y}{t_y}$	$S_{R2} = 6.55$	$K_2 := (4 \cdot q1) + (5 \cdot q2) + (5 \cdot q3)$	$K_2 = 5$
$S_{R3} := \frac{R_p}{t_p}$	$S_{R3} = 6.55$	$K_3 := (48 \cdot q1) + (66 \cdot q2) + (87 \cdot q3)$	$K_3 = 66$

$E_f := 10100000$ psi

$$I_{xtotr} := I_{xr} \quad I_{xtotr} = 0.31 \quad \text{in}^4$$

$$I_{xtotp} := I_{xp} \quad I_{xtotp} = 0.31 \quad \text{in}^4$$

$$I_{ytotr} := I_{yr} \quad I_{ytotr} = 0.31 \quad \text{in}^4$$

$$I_{ytotp} := I_{yp} \quad I_{ytotp} = 0.31 \quad \text{in}^4$$

1.59" Dia. x 6" Long Alum. Rod Properties

$$I_{st} := 0.314 \quad \text{in}^4$$

$$S_{st} := 0.395 \quad \text{in}^3$$

$$E_{bst} := 16000 \quad \text{psi}$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: K1
		Date: 9/16/11	Rev:
		Chk By:	Date:

Railing Analysis: NOTE: Rail Check is based on 6' post spacing and is conservative

Guardrail "K" Analysis	SHT K1 A
------------------------	-------------

Case 1 Uniform Load:

$$W_h := \frac{F_h}{12}$$

$$W_v := \frac{F_v}{12}$$

 $\Delta_{yr1} := 1.303$ in horizontal load - Per RISA Model

 $\Delta_{yr1} = 1.303$ in Modeled as a simple span

$$\Delta_{alry} := \frac{L}{96} + \frac{h}{24}$$

 $\Delta_{alry} = 2.3$ in Per ASTM Specification E985

 $\Delta_{xr1} := 0.393$ in vertical load - Per RISA Model

 $\Delta_{xr1} = 0.39$ in

$$\Delta_{alrx} := \frac{L}{96}$$

 $\Delta_{alrx} = 0.55$ in Per ASTM Specification E985

$$M_{yrmmax} := \frac{W_h \cdot L^2}{K_1}$$

 $M_{yrmmax} = 1463$ lb-in

 $M_{xrmmax} = 5447$ Per RISA Model

 $M_{xrmmax} = 5447$ lb-in

$$f_{bry1} := \frac{M_{yrmmax}}{S_{yr}}$$

 $f_{bry1} = 4488$ psi

$$f_{brx1} := \frac{M_{xrmmax}}{S_{xr}}$$

 $f_{brx1} = 16709$ psi

Case 2 - Point Load:

$$\Delta_{yr2} := \frac{P \cdot L^3}{K_3 \cdot E_r \cdot I_{yotr}}$$

 $\Delta_{yr2} = 0.144$ in

$$M_{yrmmax2} := \frac{P \cdot L}{K_2}$$

 $M_{yrmmax2} = 2120$ lb-in

$$f_{bry2} := \frac{M_{yrmmax2}}{S_{yr}}$$

 $f_{bry2} = 6503$ psi

$$F_{bry} := \begin{cases} (F_{bry1} \cdot 1.33) & \text{if IBC = 1} \\ F_{bry1} & \text{otherwise} \end{cases}$$

 $F_{bry} = 25000$ psi

Calculation Results:

$$Int_{r1} := \left(\frac{f_{brx1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right)$$

 $Int_{r1} = 0.85$

$$Int_{r2} := \frac{f_{bry2}}{F_{bry}}$$

 $Int_{r2} = 0.26$

$$RAILS := \begin{cases} "OK" & \text{if } \frac{\max(\Delta_{xr1}, \Delta_{yr2})}{\Delta_{alrx}} \wedge \frac{\Delta_{yr1}}{\Delta_{alry}} \leq 1 \wedge \left(\frac{f_{brx1}}{F_{bry}} \right) + \left(\frac{f_{bry1}}{F_{bry}} \right) \leq 1 \wedge \frac{f_{bry2}}{F_{bry}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

 $RAILS = "OK"$

RICE ENGINEERING Template: REI-MC-5707	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description:		Job No:	R11-09-01H
		Engineer:	JDB	Sheet No:	K1 A
		Date:	9/16/11	Rev:	
		Chk By:		Date:	

Post Analysis:

$$E_p := E_r$$

$$\Delta_{xp1} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

$$\Delta_{xp2} := \frac{P \cdot 0.85 \cdot (h - L_{st})^3}{3 \cdot E_p \cdot (I_{xp})}$$

Guardrail "K" Analysis

SHT
K1 B

$$\Delta_{xp1} = 1.097 \quad \text{in}$$

$$\Delta_{xp2} = 0.844 \quad \text{in}$$

Max Deflection:

$$\Delta_{tot} := \frac{W_h \cdot L \cdot (h - L_{st})^3}{3 \cdot E_p \cdot I_{xp}} + \frac{W_h \cdot L \cdot [h^3 - (h - L_{st})^3]}{3 \cdot [(E_p \cdot I_{xp}) + (E_p \cdot I_{st})]}$$

$$\Delta_{allp} := \frac{h}{12}$$

$$\Delta_{tot} = 1.417 \quad \text{in}$$

$$\Delta_{allp} = 3.5 \quad \text{in} \quad \text{Per ASTM E985}$$

Case 1 - Uniform Load:

$$M_{xp} := (W_h \cdot L \cdot h) + W_v \cdot L \cdot \Delta_{tot}$$

$$M_{xpmax} := 0.5 \cdot M_{xp} \cdot q1 + M_{xp} \cdot q2 + M_{xp} \cdot q3$$

$$M_{xpmax} = 9275 \quad \text{lb-in}$$

$$M_{xp2} := W_h \cdot L \cdot (h - L_{st}) + W_v \cdot L \cdot \Delta_{xp1}$$

$$M_{xpmax2} := 0.5 \cdot M_{xp2} \cdot q1 + M_{xp2} \cdot q2 + M_{xp2} \cdot q3$$

$$M_{xpmax2} = 7950 \quad \text{lb-in}$$

Case 2 - Point Load:

$$M_{xpmax4} := P \cdot (h - L_{st}) \cdot 0.85$$

$$M_{xpmax4} = 6120 \quad \text{lb-in}$$

$$M_{xpmax3} := (P \cdot h \cdot 0.85)$$

$$M_{xpmax3} = 7140 \quad \text{lb-in}$$

Max Post Stress:

$$f_{bp} := \frac{\max(M_{xpmax2}, M_{xpmax4})}{S_{xp}}$$

$$f_{bp} = 24387 \quad \text{psi}$$

$$F_{bp} := \begin{cases} (F_{bp} \cdot 1.33) & \text{if IBC = 1} \\ F_{bp} \cdot 1 & \text{otherwise} \end{cases}$$

$$F_{bp} = 25000 \quad \text{psi}$$

Max Post/Stub Combined Stress:

$$f_{bp}2 := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{xp}}{(I_{xp} + I_{st}) \cdot S_{xp}}$$

$$f_{bp}2 = 14134 \quad \text{psi}$$

$$F_{bp}w = 14000 \quad \text{psi}$$

Max Stub Stress:

$$f_{bst} := \max(M_{xpmax}, M_{xpmax3}) \cdot \frac{I_{st}}{(I_{xp} + I_{st}) \cdot S_{st}}$$

$$f_{bst} = 11816 \quad \text{psi}$$

$$F_{bst} = 16000 \quad \text{psi}$$

Calculation Results:

$$Int_{p1} := \max\left(\frac{f_{bp}}{F_{bp}}, \frac{f_{bp}2}{F_{bp}w}, \frac{f_{bst}}{F_{bst}}\right)$$

$$Int_{p1} = 1.01 \quad 1\% \text{ Over OK}$$


$$POSTS := \begin{cases} "OK" & \text{if } Int_{p1} \leq 1.02 \wedge \frac{\max(\Delta_{xp1}, \Delta_{xp2}, \Delta_{tot})}{\Delta_{allp}} \leq 1 \\ "FAIL" & \text{otherwise} \end{cases}$$

$$POSTS = "OK"$$

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template: REI-MC-5707		Engineer: JDB	Sheet No: K1 B
		Date: 9/16/11	Rev:
		Chk By:	Date:

$$R_{max} := 221 \text{ lb}$$

$$M_{max} := 9275 \cdot \cos(5\text{deg}) = 9240 \text{ lb-in}$$

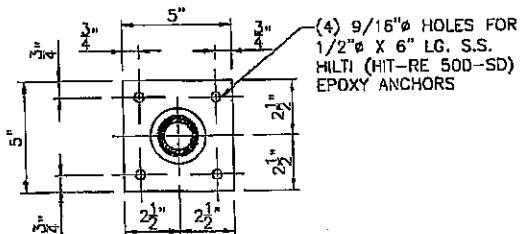

Raked 4 Bolt

Base Plate

SHT


K2

$$I_{xp} := 0.310 \text{ in}^4 \text{ Post}$$

$$I_{st} := 0.249 \text{ in}^4 \text{ Stub}$$

$$M_{max1} := M_{max} \frac{I_{xp}}{I_{xp} + I_{st}} \quad M_{max1} = 5124 \text{ in-lb}$$

$$M_{max2} := M_{max} \frac{I_{st}}{I_{xp} + I_{st}} \quad M_{max2} = 4116 \text{ in-lb}$$

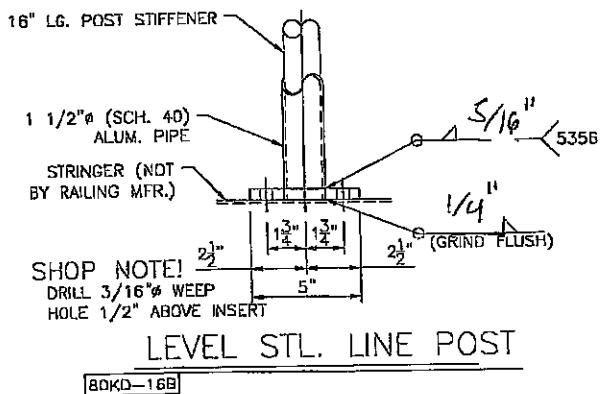

Chk weld to base plate:

$$t_{w2} := 0.3125 \text{ in (thickness of weld)}$$

$$d_2 := 1.9 \text{ in (post diameter)}$$

$$r_{w2} := 0.5d_2 + 0.5 \cdot (0.707 \cdot t_{w2}) \text{ in (radius of weld)}$$

$$A_{w2} := 0.707 \cdot l_{w2} \cdot (2 \cdot \pi \cdot r_{w2}) \quad A_{w2} = 1.47 \text{ in}^2$$

$$S_{w2} := 0.707 \cdot l_{w2} \cdot (\pi \cdot r_{w2}^2) \quad S_{w2} = 0.78 \text{ in}^3$$

$$f_{w2} = \frac{M_{max1}}{S_{w2}} \quad f_{w2} = 6564 \text{ psi}$$

$$F_{w2} := 7000 \text{ psi}$$

Use 5/16" fillet weld all around

5356 filler alloy

Chk Aluminum Base Plate:

$$L1 := 5 \text{ in} \quad D1 := 0.75 \text{ in}$$

$$L2 := 5 \text{ in} \quad D2 := 0.75 \text{ in}$$

assume load is in the direction of L2

$$L := L2 - (2 \cdot D2)$$

$$A := \frac{L - 1.9}{2} \quad A = 0.8 \text{ in}$$

$$B := L - A \quad B = 2.7 \text{ in}$$

$$P := \frac{M_{max}}{d} \quad P = 8477 \text{ lb}$$

$$M_{pl} := \frac{P \cdot A \cdot B^2}{L^2} \quad M_{pl} = 4036 \text{ in-lb}$$

$$t_{req} := \sqrt{\frac{M_{pl} \cdot 6}{16000 \cdot L}} \quad t_{req} = 0.55 \text{ in} \quad 5\% \text{ Over OK}$$

Use 1/2" x 5" x 5" AL Plate

6061-T6 alloy

Chk weld to base plate:

$$t_w := 0.25 \text{ in (thickness of weld)}$$

$$d := 1.09 \text{ in}$$

$$r_w := 0.5d + 0.5 \cdot (t_w) \text{ in (radius of weld)}$$

$$V := R_{max}$$

$$A_w := t_w \cdot (2 \cdot \pi \cdot r_w) \quad A_w = 1.05 \text{ in}^2$$

$$S_w := t_w \cdot (\pi \cdot r_w^2) \quad S_w = 0.35 \text{ in}^3$$

$$T := \frac{M_{max2}}{d} \quad T = 3776 \text{ lb}$$

$$f_w := \sqrt{\left(\frac{V}{A_w}\right)^2 + \left(\frac{T}{A_w \cdot 0.5}\right)^2} \quad f_w = 7179 \text{ psi}$$

$$R_w := 7000 \text{ psi}$$

3% Over OK

Chk Anchor Bolts (assume $f_c = 4,000 \text{ psi}$ conc.):

$$V_b := \frac{V}{2} \cdot 1.6 \quad V_b = 177 \text{ lb}$$

$$T_b := \frac{M_{max}}{(L2 - D2) \cdot 0.85 \cdot 1} \cdot 1.6 \quad T_b = 4092 \text{ lb}$$

Use 1/4" thk Groove weld all around

5356 filler alloy

Use (4) - 1/2" Dia. S.S. Threaded Rods


With Hilti HIT-RE 500 Epoxy Adhesive

Embedment = 4-1/2"

Edge = 3-1/4" End = 3-1/4"

Previously Checked with Higher Loads on Sht B3


RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template:		Engineer: JDB	Sheet No: K2
	Date: 9/16/11	Rev:	
	Chk By:	Date:	

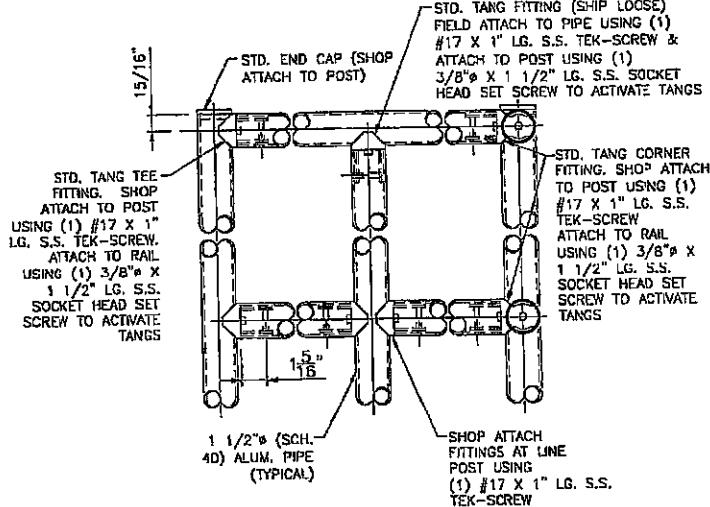

END POST LINE POST CORNER POST

TYPICAL LEVEL RAIL CONNECTIONS

80KD-2

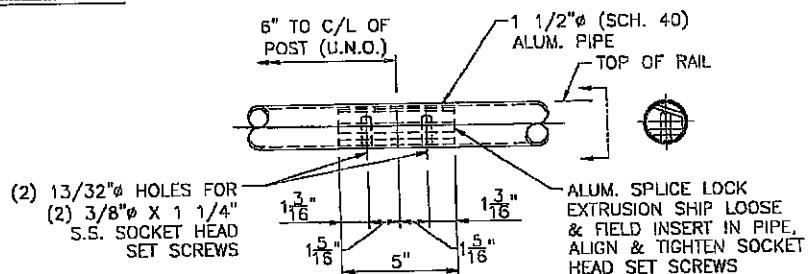

Chk 3/8" Dia. Set Screws @ Splice:

$$V_s := \frac{M_{\max}}{2}$$

$$V_s = 516 \quad \text{lb}$$

$$V_{all} := 1614 \quad \text{lb}$$

$$T := R_{\max}$$

$$T = 250 \quad \text{lb}$$

$$T_{all} := 3100 \cdot \frac{0.145}{0.341}$$

$$T_{all} = 1318 \quad \text{lb}$$

Use (2) - 3/8" Dia. S.S. Set Screws per Splice
Cond "CW", Fy= 65 ksi

Use (1) - 3/8" Dia. S.S. Set Screws per "Tang"
Cond "CW", Fy= 65 ksi

Chk Splice Piece: $S_x := 0.06 \quad \text{in}^3$

Chk #17 S.S. TEK Screw @ Tee/Post :

$$f_b := \frac{M_{\max}}{S_x}$$

$$f_b = 17183 \quad \text{psi}$$

$$F_b := 21000 \quad \text{psi}$$

$$V_2 := R_{\max}$$



$$V_2 = 250 \quad \text{lb}$$

$$V_{all2} := 2184 \cdot 0.25$$

$$V_{all2} = 546 \quad \text{lb}$$

Use Aluminum Splice Piece, As Shown
6105-T5 or 6061-T6 Alloy

Use (1) #17 S.S. TEK Screw per "Tang"
300 Series S.S.

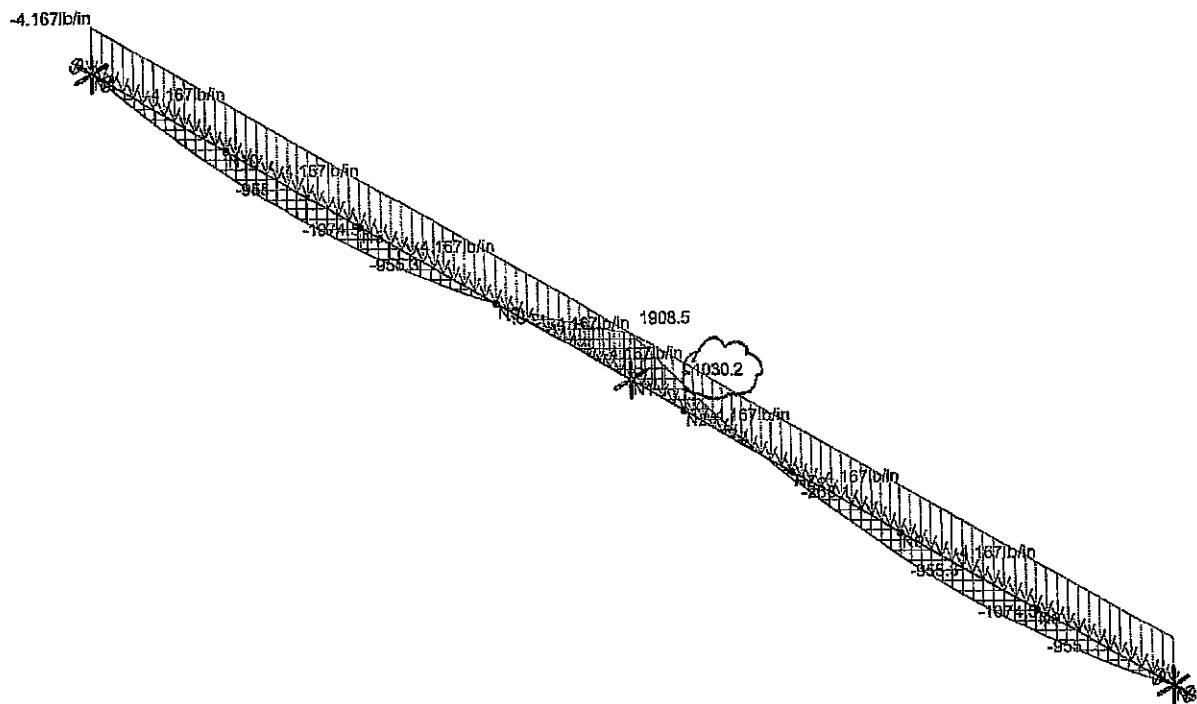

Loads: BLC 1, 50 PLF
Results for LC 1, 50 PLF
Member z Bending Moments (lb-in)

Rice Engineering	5 ft splice loads	SK - 1
Joe Bauer		Sept 16, 2011 at 1:02 PM
		5 ft Splice Loads.r3d

MIA

Inputs:

$L_s := 60$	in	(bracket span)	$A := 2.5$	in
$w_h := 0$	plf	(horiz uniform load)	$B := 2.125$	in
$w_v := 50$	plf	(vert uniform load)	$C := 2.5$	in
$P := 200$	lb	(conc. load)	$D := 1.0$	in
$R_b := 28000$	psi	(Allowable Stress)	$II := 4.313$	in
			$L := 2$	in
4/3 Stress Increase Allowed			$t := 0.25$	in

**ASSUME GROUT FILLED CMU
DESIGNED BY OTHERS**


Horizontal Uniform Loading:

$$R_1 := \frac{w_h L_s}{12}$$

$$R_1 = 0 \text{ lbs}$$

$$M_1 := B \cdot R_1$$

$$M_1 = 0 \text{ in-lb}$$

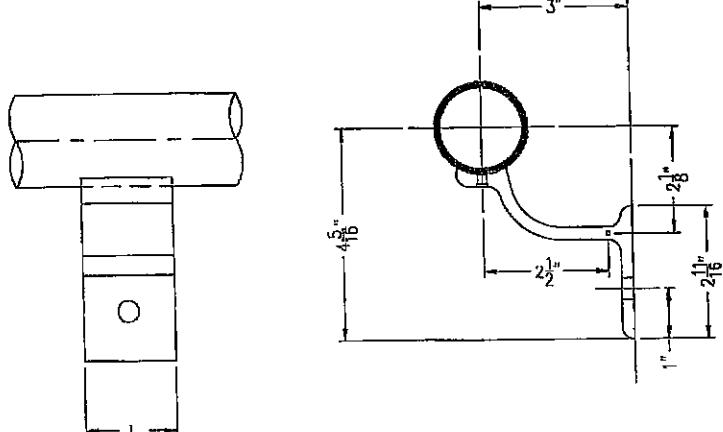

BRACKET DETAIL

Vertical Uniform Loading:

$$R_2 := \frac{w_v L_s}{12}$$

$$R_2 = 250 \text{ lbs}$$

$$M_2 := C \cdot R_2$$

$$M_2 = 625 \text{ in-lb}$$

Wall Anchorage (Horizontal Load Case):
Concentrated Loading:

$$M_3 := P \cdot \max(B, C)$$

$$M_3 = 500 \text{ in-lb}$$

$$M_4 := \max(P \cdot H, R_1 \cdot H, R_2 \cdot A) \quad M_4 = 863 \text{ in-lb}$$

$$T_p := \frac{M_4}{D \cdot 0.85} + P \quad T_p = 1215 \text{ lbs}$$

$$V := \max(R_2, 200) \quad V = 250 \text{ lbs}$$

$$M_b := \max(M_1, M_2, M_3) \quad M_b = 625 \text{ in-lb}$$

$$T_{all} := 1319 \text{ lbs}$$

$$V_{all} := 2181 \text{ lbs}$$

$$F_{b1} := \begin{cases} (F_b \cdot 1.34) & \text{if IBC = 1} \\ F_b & \text{otherwise} \end{cases}$$

$$I_b := \left(\frac{T_p}{T_{all}} \right)^{1.67} + \left(\frac{V}{V_{all}} \right)^{1.67} \quad I_b = 0.9$$

**Use (1) - 1/2" Dia. S.S. Threaded Rods
W/ Hilti HIT-HY 150 MAX Adhesive
Edge Distance: 4"
End Distance: 4"
Embedment: 4-1/2"**

Interaction:

$$I := \frac{t_{req}}{t} \quad I = 1.04 \quad < 5\% \text{ OK}$$

Bracket to Grab Rail Screws:

**Use Aluminum Wall Bracket,
6105-T5 or 6061-T6 Alloy, 2" Long**

**Use (2) #1/4-20 S.S. Fasteners
"OK" per inspection**

RICE ENGINEERING Template:	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No:	R11-09-01H
			Engineer:	JDB
			Sheet No:	M2
			Date:	9/16/11


Offset Rail Connections	SHT M3
----------------------------	-----------

ARCH/ENG NOTE:

HANG-OFF RAIL CORNER NEEDS TO BE ATTACHED WITH A (SCH. 80) TEE FITTING RATHER THAN A (SCH. 40) TEE FITTING TO PROVIDE AMPLE SPACE FOR CONNECTION TO P-END.

$$R_{max} := 200 \text{ lb}$$

$$M_{max} := R_{max} \cdot 3.25 = 650 \text{ lb-in}$$

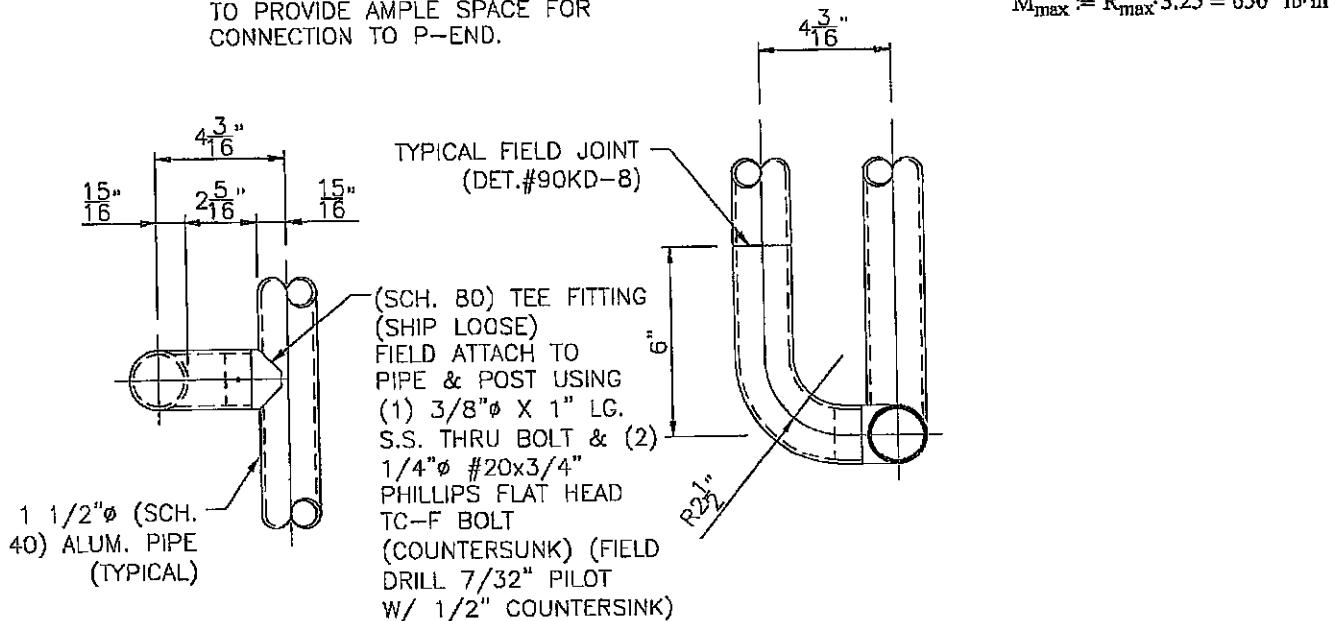

SPECIAL OFFSET RAIL CONNECTION

80KD-35E |

Chk 1/4- 20 Screws @ Tee:

$$V := \frac{M_{max}}{1.9 \cdot 0.5 \cdot (2)}$$

$$V = 342 \text{ lb}$$

$$V_{all} := 647 \text{ lb}$$

Chk Thru-Bolts @ Tee:

$$T := \frac{M_{max}}{1.9 \cdot 0.5}$$

$$T = 684 \text{ lb}$$

$$T_{all} := 3100 \cdot \frac{0.2}{0.553}$$

$$T_{all} = 1121 \text{ lb}$$



Use (2) - 1/4- 20 S.S. Screws per "Tee"
Cond "CW", Fy= 65 ksi

Use (1) - 3/8" Dia. S.S. Bolt
Drill & Tap or Thru-Bolt
Cond "CW", Fy= 65 ksi
0.200" min. Thread Engagement

RICE ENGINEERING	105 School Creek Trail Luxemburg, WI 54217 Phone: (920)845-1042 Fax: (920)845-1048 www.rice-inc.com	Project Description: R1843 Austin WTP #4	Job No: R11-09-01H
Template:		Engineer: JDB	Sheet No: M3
	Date: 9/16/11	Rev:	
	Chk By:	Date:	

Inputs:

$L_s := 60$	in	(bracket span)	$A := 3.0$	in
$w_h := 0$	plf	(horiz uniform load)	$B := 2.125$	in
$w_v := 50$	plf	(vert uniform load)	$C := 2.5$	in
$P := 200$	lb	(conc. load)	$D := 1.0$	in
$F_b := 28000$	psi	(Allowable Stress)	$H := 4.25$	in
			$L := 2$	in
<input checked="" type="checkbox"/> 4/3 Stress Increase Allowed			$t := 0.25$	in

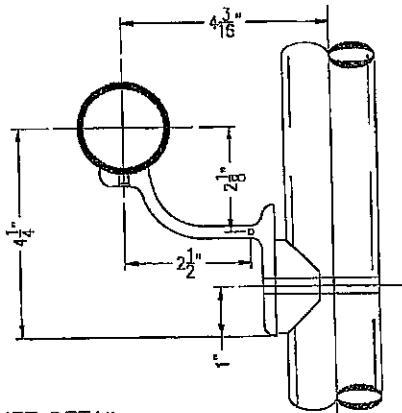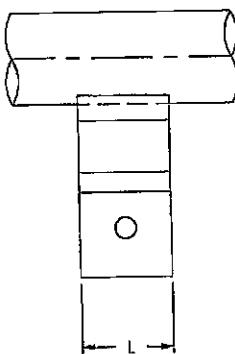BRACKET DETAIL**Horizontal Uniform Loading:**

$$R_1 := \frac{w_h \cdot L_s}{12}$$

$$R_1 = 0 \quad \text{lbs}$$

$$M_1 := B \cdot R_1$$

$$M_1 = 0 \quad \text{in-lb}$$

Vertical Uniform Loading:

$$R_2 := \frac{w_v \cdot L_s}{12}$$

$$R_2 = 250 \quad \text{lbs}$$

$$M_2 := C \cdot R_2$$

$$M_2 = 625 \quad \text{in-lb}$$

$$M_{b1} := M_1 + M_2$$

$$M_{b1} = 625 \quad \text{in-lb}$$

Concentrated Loading:

$$M_{b2} := P \cdot B$$

$$M_{b2} = 425 \quad \text{in-lb}$$

Anchorage to Post (Horizontal Load Case):

$$M_3 := H \cdot P$$

$$M_3 = 850 \quad \text{in-lb}$$

$$T_p := \frac{M_3}{0.85D} + P$$

$$T_p = 1200 \quad \text{lbs}$$

$$V := \max(R_2, 200)$$

$$V = 250 \quad \text{lbs}$$

$$T_{all} := 3100 \cdot \frac{0.145}{0.341}$$

$$T_{all} = 1318 \quad \text{lbs}$$

$$V_{all} := 1614 \quad \text{lbs}$$

$$I_b := \left(\frac{T_p}{T_{all}} \right)^2 + \left(\frac{V}{V_{all}} \right)^2$$

$$I_b = 0.85$$

Interaction:

$$I := \frac{t_{req}}{t}$$

$$I = 1.04 \leq 5\% \text{ Over OK}$$


Use (1) - 3/8" Dia. S.S. Thru Bolts
Cond "CW", Fy= 65 ksi

Bracket to Grab Rail Screws:

Use (2) #1/4-20 S.S. Fasteners
"OK" per inspection

**Use Aluminum Rail Bracket,
 6105-T5 or 6061-T6 Alloy, 2" Long**

RICE ENGINEERING		Project Description:	Job No:	R11-09-01H
			Engineer:	JDB
			Date:	9/16/11
			Chk By:	
Template:			Sheet No:	M4
			Rev:	
			Date:	

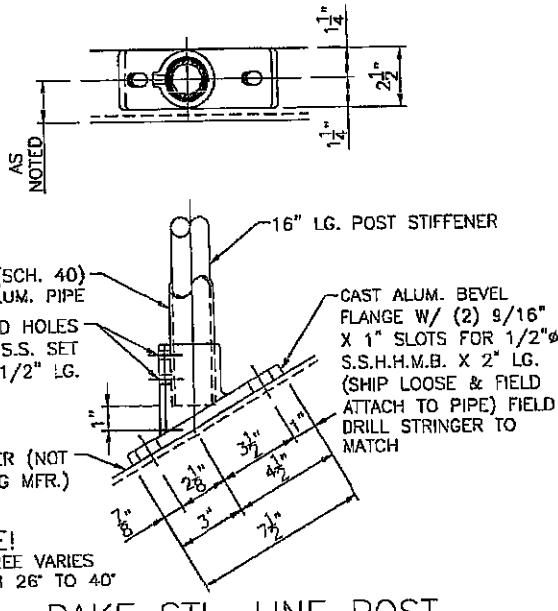

BOKD-13C

Chk shear on shoe wall:

$$P := \frac{M_{\max 1}}{0.67 \cdot (2.375)} \quad P = 5600 \quad \text{lb}$$

$$f_y := \frac{(P + R_{\max})}{2 \cdot (0.315) \cdot (2)} \quad f_y = 4643 \quad \text{psi}$$

$$F_y := \frac{0.57 \cdot (18000)}{1.65} \quad F_y = 6218 \quad \text{psi}$$

$$I := \frac{f_y}{F_y} \quad I = 0.75 \quad \text{Shear Stress "OK"}$$

Chk Bolts to Steel Stringer:

$$V_b := \frac{R_{\max}}{2} \quad V_b = 125 \quad \text{lb}$$

$$T_b := \frac{M_{\max 1}}{2 \cdot (0.5 \cdot L_2)} \quad T_b = 3565 \quad \text{lb}$$

$$V_{all} := 0.196 \cdot 23094 \quad V_{all} = 4526 \quad \text{lb}$$

$$T_{all} := 0.142 \cdot 40000 \cdot \frac{0.375}{0.456} \quad T_{all} = 4671 \quad \text{lb}$$

$$I_3 := \left(\frac{V_b}{V_{all}} \right)^2 + \left(\frac{T_b}{T_{all}} \right)^2 \quad I_3 = 0.58$$

**Use (2) - 1/2" Dia. S.S. Thru-Bolts
or Drill & Tap w/ 3/8" Min. Thread Engagement**
300 Series, $F_y = 65 \text{ ksi}$ Minimum

2 Bolt Raked
Base Plate

SHT
M5

Actual Loads:

$$L_r := 60 \quad \text{in Rail Length}$$

$$h := 42 \quad \text{in Rail Height}$$

$$R_1 := 4.17 \cdot (L_r) = 250 \quad \text{lb}$$

$$M_1 := \max(R_1 \cdot h, 200 \cdot 0.85 \cdot h) = 10508 \quad \text{in-lb}$$

$$M_{\max 1} := \cos(32\text{deg}) \cdot M_1 = 8912 \quad \text{in-lb}$$

$$d := 2.5 \quad \text{in (sleeve dia.)}$$

Maximum Loads:

$$R_{\max} := 250 \quad \text{lb}$$

$$M := R_{\max} \cdot h = 10500 \quad \text{in-lb}$$

$$M_{\max} := \cos(32\text{deg}) \cdot M = 8905 \quad \text{in-lb}$$

$$\sigma_{\max} := 14182 \quad \text{psi} \quad \text{Based on Algor Model}$$

$$S_{eff} := \frac{M_{\max}}{\sigma_{\max}} = 0.63 \quad \text{in}^3 \quad \text{Based on Algor Model}$$

Chk Aluminum Base Plate:

$$L_1 := 7.5 \quad \text{in} \quad D_1 := 1 \quad \text{in}$$

$$L_2 := 2.5 \quad \text{in} \quad D_2 := 1.25 \quad \text{in}$$

$$t := 0.5 \quad \text{in}$$

$$\sigma_{actual} := \frac{M_{\max 1}}{S_{eff}} \quad \sigma_{actual} = 14193 \quad \text{psi}$$

$$\sigma_{all} := \frac{1.3 \cdot (18000)}{1.65} \quad \sigma_{all} = 14182 \quad \text{psi}$$

$$I_2 := \frac{\sigma_{actual}}{\sigma_{all}} \quad I_2 = 1$$

**Use Cast Aluminum Base, as shown
535 casting alloy, $F_u = 35 \text{ ksi min.}$**

Note: Model based on 5'-0" max post spacing measured along rail and a post height of 3'-6"
See next page for worst case Algor model results

RICE
ENGINEERING
Template:

105 School Creek Trail
Luxemburg, WI 54217
Phone: (920)845-1042
Fax: (920)845-1048
www.rice-inc.com

Project Description:


R1843 Austin WTP #4

Job No: R11-09-01H

Engineer: JDB Sheet No: M5

Date: 9/16/11 Rev:

Chk By: Date:

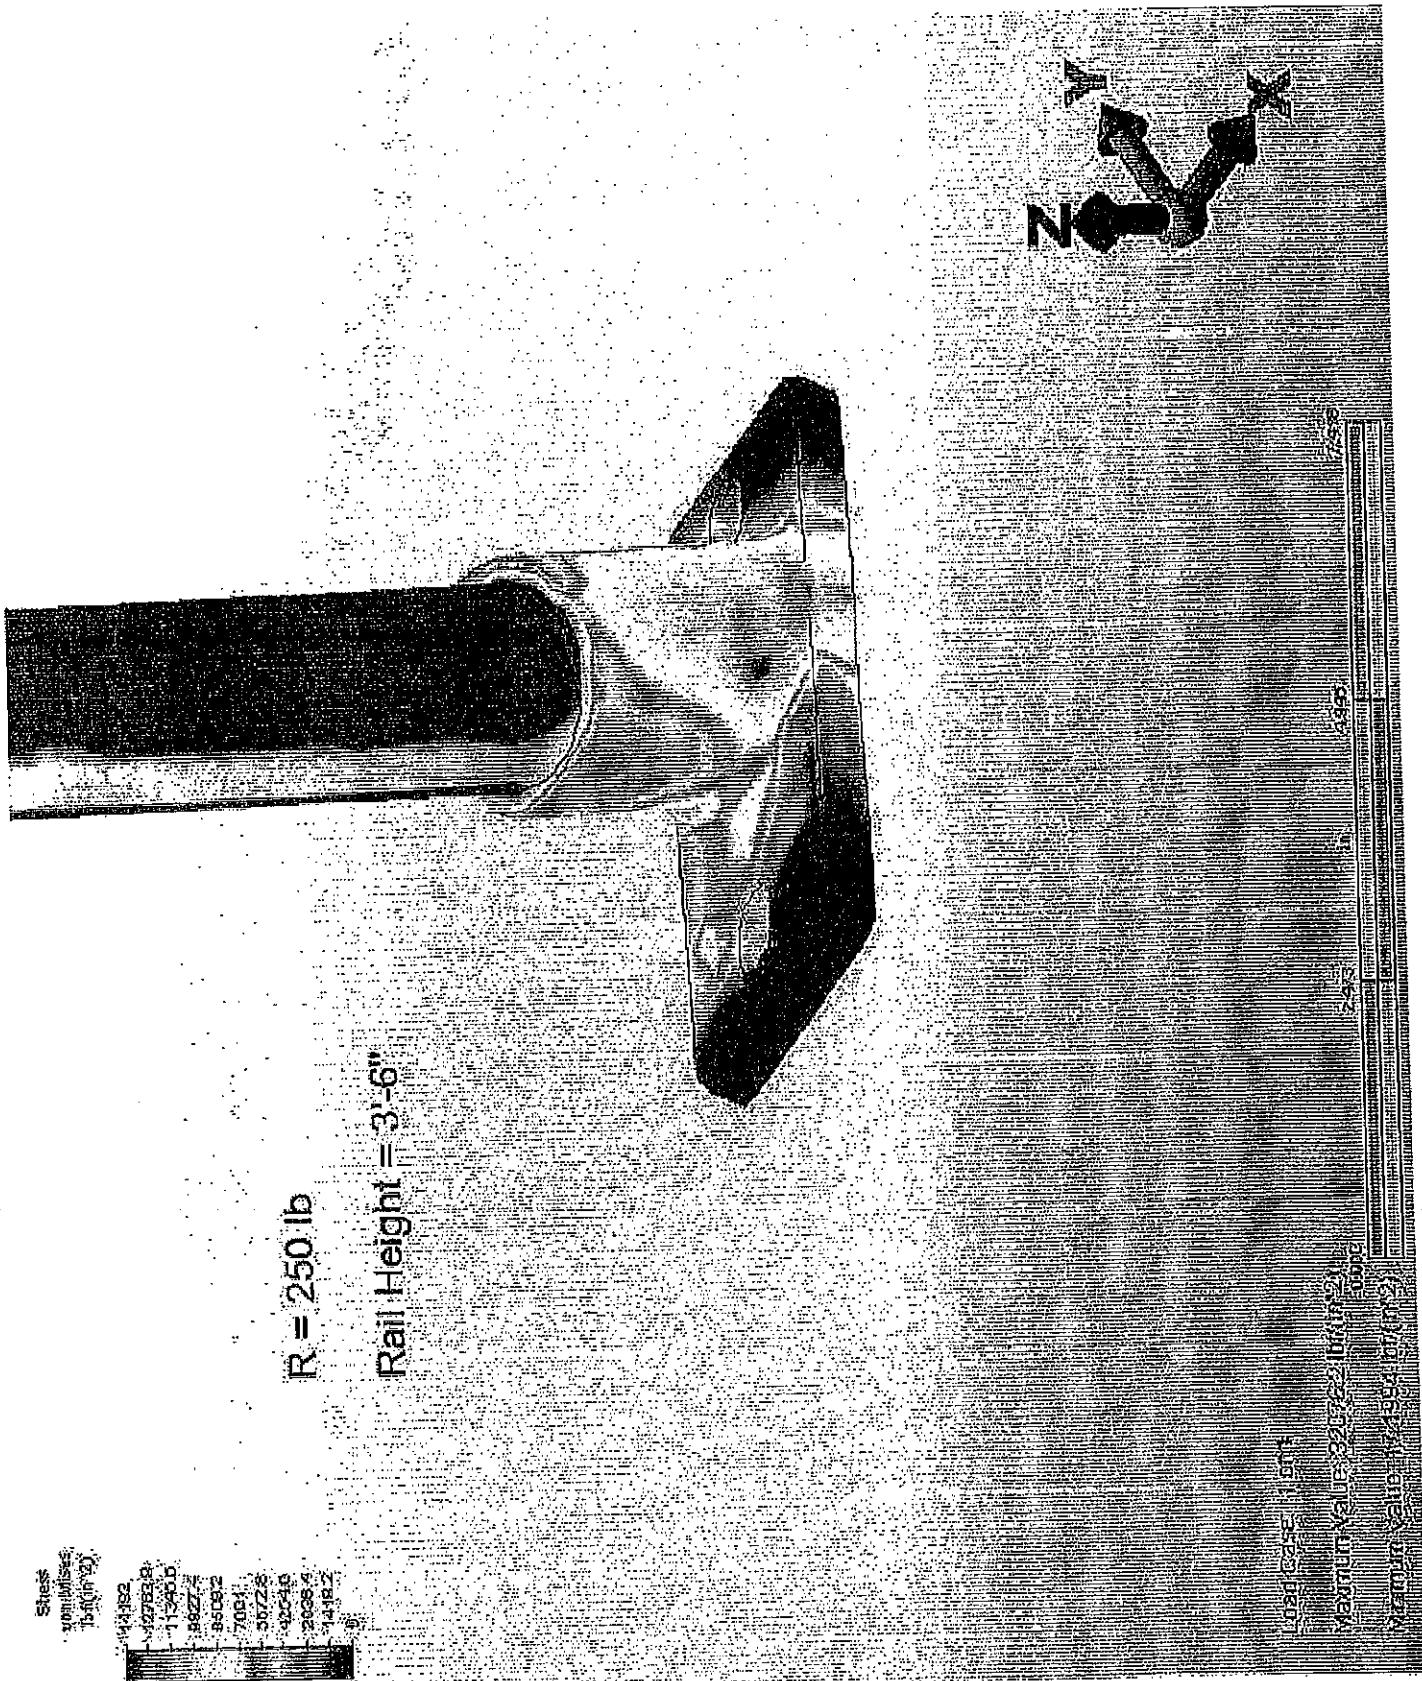

Sheet
10 of 10
15.60 in x 22

M5A






Attached are page(s) from the 2008 Hilti North American Product Technical Guide. For complete details on this product, including data development, product specifications, general suitability, installation, corrosion, and spacing & edge distance guidelines, please refer to the Technical Guide, or contact Hilti.

Hilti, Inc.
5400 South 122nd East Avenue
Tulsa, OK 74146

1-800-879-8000
www.hilti.com

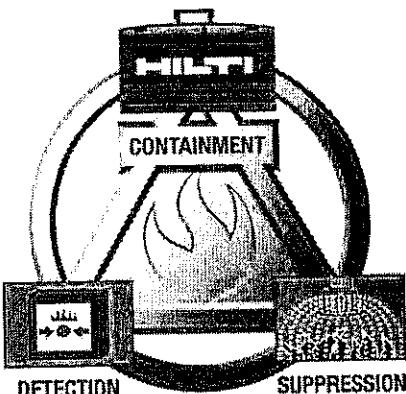

PROFIS:

The World's Most Powerful Anchor Design Software

- Easy to Learn – Start working in just minutes
- Fast and Powerful – Produce detailed designs quickly
- Specify with Confidence – The largest number of approvals and latest design codes


No charge.

Download now at www.us.hilti.com
or www.hilti.ca

Hilti Diaphragm Deck Design

The Hilti Diaphragm Deck Design Program allows designers to quickly and accurately design roof deck and composite floor deck diaphragms.

- Ability to design with innovative Hilti fasteners for frame and sidelap connection
- Creates easy to use load tables with span ranges based on user input
- Allows for different safety factors depending on load type, building code and field quality control
- Direct link to Hilti website

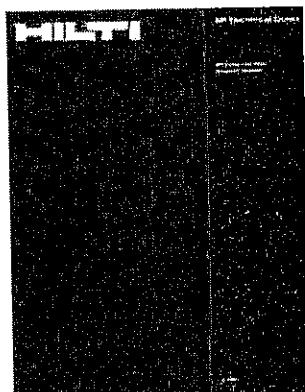

Hilti Online

- Technical Library
- Design Centers
- Interactive Product Advisors
- Full-line Product Catalog
- Online Ordering
- Maps to Hilti locations
- "Contact Us" program to answer your questions

MI - Industrial Pipe Support Technical Guide


A guide to specifying the Hilti modular pipe support system for medium to heavy loads without welding.

- MI System is the ideal solution for pipes up to 24 in. diameter
- Reliable fastenings without welds
- Easily installed

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7

4.2.7.1 Product Description

Fastener Components

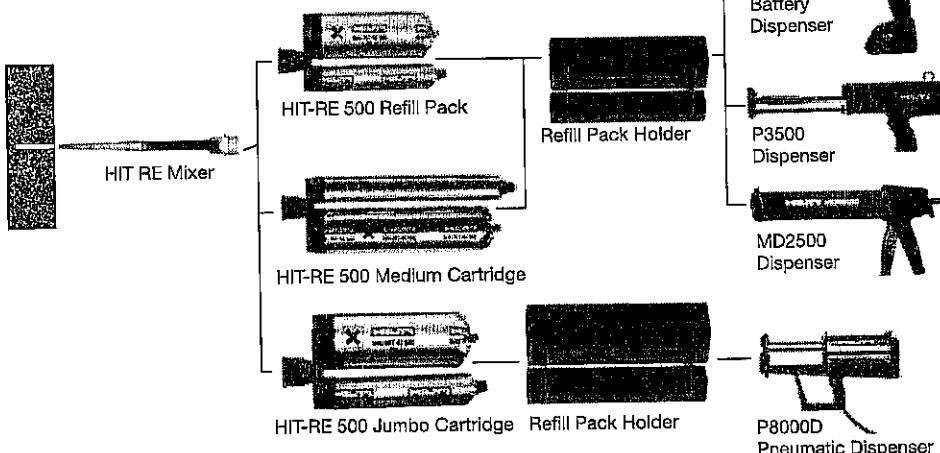

The Hilti HIT-RE 500 System is a high strength, two part epoxy adhesive. The system consists of a side-by-side adhesive refill pack, a mixing nozzle, a HIT dispenser with refill pack holder, and either a threaded rod, rebar, HIS internally threaded insert or smooth epoxy coated bar. HIT-RE 500 is specifically designed for fastening into solid base materials such as concrete, grout, stone or solid masonry. HIT-RE 500 may be used in underwater fastenings and for oversized holes up to 2 times the rod diameter (2-1/2" rod and 3" max. hole diameter) and for diamond-cored holes.

Product Features

- Superior bond performance
- Use in diamond cored or pneumatic drilled holes and under water up to 165 feet (50 m)
- Meets DOT requirements for most states; contact the Hilti Technical Staff
- Meets requirements of ASTM C 881-90, Type IV, Grade 2 and 3, Class A, B, C except gel times
- Meets requirements of AASHTO specification M235, Type IV, Grade 3, Class A, B, C except gel times
- Mixing tube provides proper mixing, eliminates measuring errors and minimizes waste
- Contains no styrene; virtually odorless
- Extended temperature range from 23°F to 104°F (-5°C to 40°C)
- Excellent weathering resistance; Resistance against elevated temperatures
- Suitable for oversized holes
- Seismic qualified per IBC®/IRC® 2003, IBC®/IRC® 2000 and UBC® 1997 (ICC-ES AC58). Please refer to ESR-1682.

4.2.7.1 Product Description

4.2.7.2 Material Specifications

4.2.7.3 Technical Data

4.2.7.4 Installation Instructions

4.2.7.5 Ordering Information

Listings/Approvals

City of Los Angeles

Research Report #25514

NSF/ANSI Std 61

certification for use in potable water

European Technical Approval

ETA-04/0027

ETA-04/0028

ETA-04/0029



Code Compliance

IBC®/IRC® 2003 (ICC-ES AC58)

IBC®/IRC® 2000 (ICC-ES AC58)


UBC® 1997 (ICC-ES AC58)

LEED®: Credit 4.1-Low Emitting Materials




The Leadership in Energy and Environmental Design (LEED®) Green Building Rating system™ is the nationally accepted benchmark for the design, construction and operation of high performance green buildings.


Components




HAS Threaded Rods



HIS Internally Threaded Inserts



Rebar (supplied by contractor)



Smooth, epoxy coated bar (supplied by contractor)

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

Guide Specifications

Master Format Section:

03250 (Concrete accessories)

Related Sections:

03200 (Concrete Reinforcing-Reinforcing Accessories)

05050 (Metal Fabrication)

05120 (Structural Steel; Masonry Accessories)

Injectable adhesive shall be used for installation of all reinforcing steel dowels or threaded anchor rods and inserts into new or existing concrete. Adhesive shall be furnished in side-by-side refill packs which keep component A and component B separate. Side-by-side packs shall be designed to compress during use to minimize waste volume. Side-by-side packs shall also be designed to accept static mixing nozzle

which thoroughly blends component A and component B and allows injection directly into drilled hole. Only injection tools and static mixing nozzles as supplied by manufacturer shall be used. Manufacturer's instructions shall be followed. Injection adhesive shall be formulated to include resin and hardener to provide optimal curing speed as well as high strength and stiffness. Typical curing time at 68°F (20°C) shall be approximately 12 hours.

Injection adhesive shall be HIT-RE 500, as furnished by Hilti.

Anchor Rods Shall be furnished with chamfered ends so that either end will accept a nut and washer. Alternatively, anchor rods shall be furnished with a 45 degree chisel point on one end to allow for easy insertion into the adhesive-filled hole. Anchor rods shall be manufactured to meet the following requirements:

1. ISO 898 Class 5.8


2. ASTM A 193, Grade B7 (high strength carbon steel anchor);

3. AISI 304 or AISI 316 stainless steel, meeting the requirements of ASTM F 593 (condition CW).

Special order length HAS Rods may vary from standard product.

Nuts and Washers Shall be furnished to meet the requirements of the above anchor rod specifications.

Fastener Components

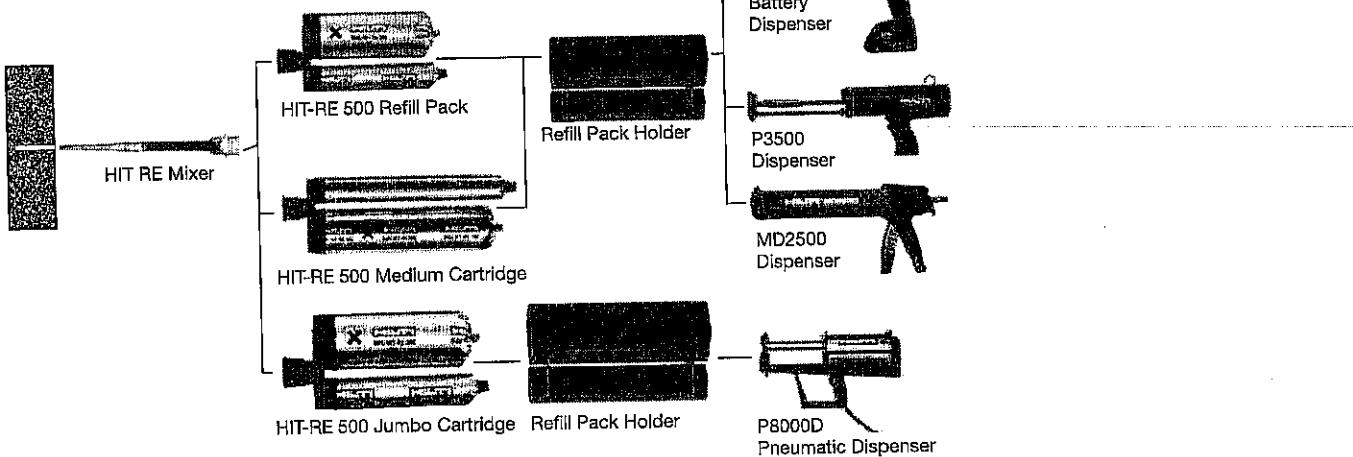

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7

4.2.7.2 Material Specifications

Material Properties for HIT-RE 500 – Cured Adhesive

Bond Strength ASTM C882-911 2 day cure 7 day cure	12.4 MPa 12.4 MPa	1800 psi 1800 psi
Compressive Strength ASTM D-695-961	82.7 MPa	12,000 psi
Compressive Modulus ASTM D-695-961	1493 MPa	0.22×10^6 psi
Tensile Strength 7 day ASTM D-638-97	43.5 MPa	6310 psi
Elongation at break ASTM D-638-97	2.0%	2.0%
Heat Deflection Temperature ASTM D-648-95	63°C	146°F
Absorption ASTM D-570-95	0.06%	0.06%
Linear Coefficient of Shrinkage on Cure ASTM D-2566-86	0.004	0.004
Electrical resistance DIN IEC 93 (12.93)	6.6×10^{13} Ω/m	1.7×10^{12} Ω/in.

1 Minimum values obtained as the result of tests at three cure temperatures (23, 40, 60°F).

Mechanical Properties	
f_y ksi (MPa)	min. f_u ksi (MPa)
58 (400)	72.5 (500)
105 (724)	125 (862)
65 (448)	100 (689)
45 (310)	85 (586)
54.4 (375)	66.7 (460)
50.8 (350)	101.5 (700)

Material Specifications

Standard HAS-E rod material meets the requirements of ISO 898 Class 5.8

High Strength or 'Super HAS' rod material meets the requirements of ASTM A 193, Grade B7

Stainless HAS rod material meets the requirements of ASTM F 593 (304/316) Condition CW 3/8" - 5/8"

Stainless HAS rod material meets the requirements of ASTM F 593 (304/316) Condition CW 3/4" - 1 1/4"

HIS Insert 11MnPb30+C Carbon Steel conforming to DIN 10277-3

HIS-R Insert X5CrNiMo17122 K700 Stainless Steel conforming to DIN EN 10088-3

HAS Super & HAS-E Standard Nut material meets the requirements of ASTM A 563, Grade DH

HAS Stainless Steel Nut material meets the requirements of ASTM F 594

HAS-E Carbon Steel and Stainless Steel Washers meet dimensional requirements of ANSI B18.22.1 Type A Plain

HAS Super & HAS-E Standard Washers meet the requirements of ASTM F 436

All HAS-E & HAS Super Rods (except 7/8") & HAS-E Standard, HIS Inserts, nuts & washers are zinc plated to ASTM B 633 SC 1


7/8" Standard HAS-E & HAS Super rods hot-dip galvanized in accordance with ASTM A 153

Note: Special Order steel rod material may vary from standard steel rod materials.

4.2.7.3 Technical Data

HIT-RE 500 Installation Specification Table for HAS Threaded Rods

HAS Rod Size		in. (mm)	3/8 (9.5)	1/2 (12.7)	5/8 (15.9)	3/4 (19.1)	7/8 (22.2)	1 (25.4)	1-1/4 (31.8)
d_{bit} bit diameter ¹	in.	7/16	9/16	3/4	7/8	1	1-1/8	1-3/8	
h_{nom} std. depth of embed.	in. (mm)	3-3/8 (90)	4-1/2 (110)	5-5/8 (143)	6-3/4 (171)	7-7/8 (200)	9 (229)	11-1/4 (286)	
T_{max} max.	HAS-E Rods $\geq h_{nom}$	Embed. ft lb (N·m)	18 (24)	30 (41)	75 (102)	150 (203)	175 (237)	235 (319)	400 (540)
tightening torque	HAS SS HAS-Super	Embed. ft lb (N·m)	15 (20)	20 (27)	50 (68)	105 (142)	125 (169)	165 (224)	280 (375)
h min. base material thickness	(in.)				1.5 h_{ef}				
Approx. number of fastenings per cartridge at standard embedment ²									
Small Cartridge		52	28	11	7	5	4	2	
Medium Cartridge		84	45	18	11	8	6	3	
Jumbo Cartridge		255	137	56	37	27	19	12	




1 Use matched tolerance carbide tipped bits or Hilti matched tolerance DD-B or DD-C diamond core bits.

2 Assumes no waste.

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

HIT-RE 500 Installation Specification Table for HIS Inserts

HIS Insert Details	in. (mm)	3/8 (9.5)	1/2 (12.7)	5/8 (15.9)	3/4 (19.1)
d_{bit} bit diameter ^{1,2}	in.	11/16	7/8	1-1/8	1-1/4
h_{nom} std. embed. depth	in. (mm)	4-1/4 (110)	5 (125)	6-5/8 (170)	8-1/4 (210)
ℓ_{th} useable thread length	in. (mm)	1 (25)	1-3/16 (30)	1-1/2 (40)	2 (50)
T_{max} Max. tightening torque	ft lb (N·m)	18 (24)	35 (47)	80 (108)	160 (217)
h min. base material thickness	in. (mm)	6-3/8 (162)	7-1/2 (191)	10 (254)	12-3/8 (314)
Approx. number of fastenings per cartridge at standard embedment ²					
Small Cartridge		27	16	6	4
Medium Cartridge		49	30	11	8
Jumbo Cartridge		168	105	38	27

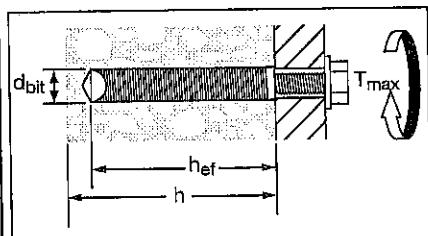

1 Use matched tolerance carbide tipped bits or Hilti matched tolerance DD-B or DD-C diamond core bits.

2 Assumes no waste.

HIT-RE 500 Installation Specification Table for Rebar in Concrete

Rebar Size: Details	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10	No. 11	
Bit diameter ^{1,2,3}	in.	1/2	5/8	3/4	7/8	1	1-1/8	1-3/8	1-1/2	1-3/4
h_{nom} std. embed. depth	in. (mm)	3-3/8 (86)	4-1/2 (114)	5-5/8 (143)	6-3/4 (171)	7-7/8 (200)	9 (229)	10-1/8 (257)	11-1/4 (286)	12-3/8 (314)
Approx. number of fastenings per cartridge at standard embedment ³										
Small Cartridge		44	25	16	11	8	6	3	2	1
Medium Cartridge		72	41	27	18	13	10	5	3	2
Jumbo Cartridge		221	125	83	56	41	31	14	11	7

1 Rebar diameters may vary. Use smallest drill bit which will accommodate rebar.

2 Use matched tolerance carbide tipped bits or Hilti matched tolerance DD-B or DD-C diamond core bits.

3 Assumes no waste.

HIT-RE 500 Installation Specification Table for Metric Rebar in Concrete (Canada Only)

Rebar Size: Details	10M	15M	20M	25M	30M	35M	
Bit diameter ^{1,2}	in.	5/8	3/4	1	1-1/8	1-3/8	1-3/4
h_{nom} std. embed. depth	in. (mm)	115	145	200	230	260	315
Approx. number of fastenings per cartridge at standard embedment ²							
Small Cartridge		20	17	5	6	3	1
Medium Cartridge		32	28	9	10	5	2
Jumbo Cartridge		98	84	27	31	16	7

Combined Shear and Tension Loading

$$\left(\frac{N_d}{N_{rec}}\right)^{5/3} + \left(\frac{V_d}{V_{rec}}\right)^{5/3} \leq 1.0 \text{ (Ref. Section 4.1.8.3)}$$

1 Rebar diameters may vary. Use smallest bit which will accommodate rebar.

2 Assumes no waste.

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7**HIT-RE 500 Allowable and Ultimate Bond/Concrete Capacity for HAS Rods in Normal Weight Concrete^{1,2,3,4}**

Anchor Diameter in (mm)	Embedment Depth in (mm)	HIT-RE 500 Allowable Bond/Concrete Capacity				HIT-RE 500 Ultimate Bond/Concrete Capacity			
		Tensile		Shear		Tensile		Shear	
		f' _c = 2000 psi (13.8 MPa) lb (kN)	f' _c = 4000 psi (27.6 MPa) lb (kN)	f' _c = 2000 psi (13.8 MPa) lb (kN)	f' _c = 4000 psi (27.6 MPa) lb (kN)	f' _c = 2000 psi (13.8 MPa) lb (kN)	f' _c = 4000 psi (27.6 MPa) lb (kN)	f' _c = 2000 psi (13.8 MPa) lb (kN)	f' _c = 4000 psi (27.6 MPa) lb (kN)
3/8 (9.5)	1-3/4 (44)	645 (2.9)	1095 (4.9)	1510 (6.7)	2135 (9.5)	2580 (11.5)	4370 (19.4)	4530 (20.2)	6405 (28.4)
	3-3/8 (86)	2190 (9.7)	2585 (11.5)	3155 (14.0)	4460 (19.8)	8760 (39.0)	10345 (46.0)	9460 (42.1)	13380 (59.5)
	4-1/2 (114)	2420 (10.8)	2585 (11.5)	4855 (21.6)	6860 (30.5)	9685 (43.1)	10335 (46.0)	14560 (64.8)	20580 (91.5)
1/2 (12.7)	2-1/4 (57)	1130 (5.0)	1965 (8.7)	2510 (11.2)	3550 (15.8)	4530 (20.2)	7860 (35.0)	7525 (33.5)	10640 (47.3)
	4-1/2 (114)	4045 (18.0)	5275 (23.5)	5610 (25.0)	7935 (35.3)	16185 (72.0)	21095 (93.8)	16820 (74.8)	23800 (105.9)
	6 (152)	4775 (21.2)	5380 (23.9)	8635 (38.4)	12210 (54.3)	19095 (84.9)	21520 (95.7)	25900 (115.2)	36620 (162.9)
5/8 (15.9)	2-7/8 (73)	1690 (7.5)	3045 (13.5)	5245 (23.3)	7420 (33.0)	6770 (30.1)	12175 (54.2)	15735 (70.0)	22250 (99.0)
	5-5/8 (143)	6560 (29.2)	7355 (32.7)	8760 (39.0)	12395 (55.1)	26240 (116.7)	29420 (130.9)	26280 (116.9)	37180 (165.4)
	7-1/2 (190)	7320 (32.6)	7515 (33.4)	13615 (60.6)	19080 (84.9)	29290 (130.3)	30060 (133.7)	40480 (180.1)	57240 (254.6)
3/4 (19.1)	3-3/8 (86)	2310 (10.3)	4515 (20.1)	7335 (32.6)	10370 (46.1)	9250 (41.1)	18065 (80.4)	22000 (97.9)	31108 (138.4)
	6-3/4 (172)	8670 (38.6)	10755 (47.8)	12615 (56.1)	17840 (79.4)	34685 (154.3)	43020 (191.4)	37840 (168.3)	53520 (238.1)
	9 (229)	10385 (46.2)	12995 (57.8)	19430 (86.4)	27470 (122.2)	41535 (184.8)	51985 (231.2)	58280 (259.2)	82400 (366.5)
7/8 (22.2)	4 (101)	3005 (13.4)	5665 (25.2)	7795 (34.7)	11020 (49.0)	12030 (53.5)	22670 (100.8)	23375 (104.0)	33050 (147.0)
	7-7/8 (200)	12495 (55.6)	15875 (70.6)	17175 (76.4)	24290 (108.0)	49975 (222.3)	63495 (282.4)	51520 (229.2)	72860 (324.1)
	10-1/2 (267)	14705 (65.4)	16185 (72.0)	26440 (117.6)	37390 (166.3)	58820 (261.6)	64730 (287.9)	79320 (352.8)	112160 (498.9)
1 (25.4)	4-1/2 (114)	3945 (17.5)	8440 (37.5)	10035 (44.6)	14190 (63.1)	15790 (70.2)	33765 (150.2)	30104 (133.9)	42565 (189.3)
	9 (229)	13845 (61.6)	17365 (77.2)	22435 (99.8)	31720 (141.1)	55380 (246.3)	69465 (309.0)	67300 (299.4)	95160 (423.3)
	12 (305)	17935 (79.8)	17935 (79.8)	34535 (153.6)	48830 (217.2)	71740 (319.1)	71740 (319.1)	103600 (460.8)	146480 (651.6)
1-1/4 (31.8)	5-5/8 (143)	5760 (25.6)	12815 (57.0)	14760 (65.7)	20870 (92.8)	23045 (102.5)	51270 (228.1)	44280 (197.0)	62610 (278.5)
	11-1/4 (286)	24610 (109.5)	31620 (140.7)	35050 (155.9)	49570 (220.5)	98430 (437.8)	126480 (562.6)	105140 (467.7)	148710 (661.5)
	15 (381)	34130 (151.8)	35270 (156.9)	53960 (240.0)	76300 (339.4)	136525 (607.3)	141090 (627.6)	161880 (720.1)	228900 (1018.2)

1 Influence factors for spacing and/or edge distance are applied to concrete/bond values above, and then compared to the steel value. The lesser of the values is to be used for the design.

2 Average ultimate concrete shear capacity based on Concrete Capacity Design (CCD) method for standard and deep embedment and based on testing for shallow embedment.

3 All values based on holes drilled with carbide bit and cleaned with brush per manufacturer's instructions. Ultimate tensile concrete/bond loads represent the average values obtained in testing.

4 For underwater applications up to 165 feet/50m depth reduce the tabulated concrete/bond values 30% to account for reduced mechanical properties of saturated concrete.

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

Allowable Steel Strength for Carbon Steel & Stainless Steel HAS Rods¹

Rod Diameter in. (mm)	HAS-E Standard ISO 898 Class 5.8		HAS Super ASTM A 193 B7		HAS SS AISI 304/316 SS	
	Tensile lb (kN)	Shear lb (kN)	Tensile lb (kN)	Shear lb (kN)	Tensile lb (kN)	Shear lb (kN)
3/8 (9.5)	2640 (11.7)	1360 (6.0)	4555 (20.3)	2345 (10.4)	3645 (16.2)	1875 (8.3)
1/2 (12.7)	4700 (20.9)	2420 (10.8)	8100 (36.0)	4170 (18.5)	6480 (28.8)	3335 (14.8)
5/8 (15.9)	7340 (32.7)	3780 (16.8)	12655 (56.3)	6520 (29.0)	10125 (45.0)	5215 (23.2)
3/4 (19.1)	10570 (47.0)	5445 (24.2)	18225 (81.1)	9390 (41.8)	12390 (55.1)	6385 (28.4)
7/8 (22.2)	14385 (64.0)	7410 (33.0)	24805 (110.3)	12780 (56.9)	16865 (75.0)	8690 (38.6)
1 (25.4)	18790 (83.6)	9680 (43.0)	32400 (144.1)	16690 (74.2)	22030 (98.0)	11350 (50.5)
1-1/4 (31.8)	29360 (130.6)	15125 (67.3)	50620 (225.2)	26080 (116.0)	34425 (153.1)	17735 (78.9)

1 Steel strength as defined in AISC Manual of Steel Construction (ASD):

$$\text{Tensile} = 0.33 \times F_u \times \text{Nominal Area}$$

$$\text{Shear} = 0.17 \times F_u \times \text{Nominal Area}$$

Ultimate Steel Strength for Carbon Steel & Stainless Steel HAS Rods¹

Rod Diameter in. (mm)	HAS-E Standard ISO 898 Class 5.8			HAS Super ASTM A 193 B7			HAS SS AISI 304/316 SS		
	Yield lb (kN)	Tensile lb (kN)	Shear lb (kN)	Yield lb (kN)	Tensile lb (kN)	Shear lb (kN)	Yield lb (kN)	Tensile lb (kN)	Shear lb (kN)
3/8 (9.5)	4495 (20.0)	6005 (26.7)	3605 (16.0)	8135 (36.2)	10350 (43.4)	6210 (27.6)	5035 (22.4)	8280 (36.8)	4970 (22.1)
1/2 (12.7)	8230 (36.6)	10675 (47.5)	6405 (28.5)	14900 (66.3)	18405 (79.0)	11040 (49.1)	9225 (41.0)	14720 (65.5)	8835 (39.3)
5/8 (15.9)	13110 (58.3)	16680 (74.2)	10010 (44.5)	23730 (105.6)	28760 (125.7)	17260 (76.8)	14690 (65.3)	23010 (102.4)	13805 (61.4)
3/4 (19.1)	19400 (86.3)	24020 (106.9)	14415 (64.1)	35120 (156.2)	41420 (185.7)	24850 (110.5)	15050 (66.9)	28165 (125.3)	16800 (75.2)
7/8 (22.2)	26780 (119.1)	32695 (145.4)	19620 (87.3)	48480 (215.7)	56370 (256.9)	33825 (150.5)	20775 (92.4)	38335 (170.5)	23000 (102.3)
1 (25.4)	35130 (156.3)	42705 (190.0)	25625 (114.0)	63600 (282.9)	73630 (337.0)	44180 (196.5)	27255 (121.2)	50070 (222.7)	30040 (133.6)
1-1/4 (31.8)	56210 (250.0)	66730 (296.8)	40035 (178.1)	101755 (452.6)	115050 (511.8)	69030 (307.1)	43610 (194.0)	78235 (348.0)	46940 (208.8)

1 Steel strength as defined in AISC Manual of Steel Construction 2nd Ed. (LRFD):

$$\text{Yield} = F_y \times \text{Tensile Stress Area}$$

$$\text{Tensile} = 0.75 \times F_u \times \text{Nominal Area}$$

$$\text{Shear} = 0.45 \times F_u \times \text{Nominal Area}$$

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7

HIT-RE 500 Allowable Bond/Concrete Capacity and Steel Strength for HIS Carbon Steel and HIS-R Stainless Steel Internally Threaded Inserts

Anchor Diameter in. (mm)	Embedment Depth in. (mm)	HIT-RE 500 Allowable Bond/Concrete Capacity ²		Steel Bolt Strength ^{1,2}			
		Tensile $f'_c \geq 2000 \text{ psi}$ (13.8 MPa) lb (kN)	Shear $f'_c \geq 2000 \text{ psi}$ (13.8 MPa) lb (kN)	ASTM A 325 Carbon Steel		ASTM F 593 Stainless Steel	
				Tensile ¹ lb (kN)	Shear ¹ lb (kN)	Tensile ¹ lb (kN)	Shear ¹ lb (kN)
3/8 (9.5)	4-1/4 (108)	2870 (12.8)	1565 (7.0)	4370 (19.4)	2250 (10.0)	3645 (16.2)	1875 (8.3)
1/2 (12.7)	5 (127)	4530 (20.1)	2890 (12.9)	7775 (34.6)	4005 (17.8)	6480 (28.8)	3335 (14.8)
5/8 (15.9)	6-5/8 (168)	8255 (36.7)	4635 (20.6)	12150 (54.0)	6260 (27.8)	10125 (45.0)	5215 (23.2)
3/4 (19.1)	8-1/4 (210)	9030 (40.1)	6695 (29.8)	17945 (77.8)	9010 (40.1)	12395 (55.1)	6385 (28.4)

HIT-RE 500 Ultimate Bond/Concrete Capacity and Steel Strength for HIS Carbon Steel and HIS-R Stainless Steel Internally Threaded Inserts

Anchor Diameter in. (mm)	Embedment Depth in. (mm)	HIT-RE 500 Ultimate Bond/Concrete Capacity ²		Ultimate Bolt Strength ^{1,2}			
		Tensile $f'_c \geq 2000 \text{ psi}$ (13.8 MPa) lb (kN)	Shear $f'_c \geq 2000 \text{ psi}$ (13.8 MPa) lb (kN)	ASTM A 325 Carbon Steel		ASTM F 593 Stainless Steel	
				Tensile ¹ lb (kN)	Shear ¹ lb (kN)	Tensile ¹ lb (kN)	Shear ¹ lb (kN)
3/8 (9.5)	4-1/4 (108)	11480 (51.0)	6260 (27.8)	9935 (44.2)	5960 (26.5)	8280 (36.8)	4970 (22.1)
1/2 (12.7)	5 (127)	18115 (80.5)	11565 (51.4)	17665 (78.6)	10600 (47.2)	14720 (65.5)	8835 (39.3)
5/8 (15.9)	6-5/8 (168)	33025 (146.9)	18550 (82.5)	27610 (122.8)	16565 (73.7)	23010 (102.4)	13805 (61.4)
3/4 (19.1)	8-1/4 (210)	36125 (160.6)	26775 (119.1)	39760 (176.9)	23855 (106.1)	28165 (125.3)	16900 (75.1)

1 Steel values in accordance with AISC

ASTM A 325 bolts: $F_y = 92 \text{ ksi}$, $F_u = 120 \text{ ksi}$

ASTM F 593 (AISI 304/316): $F_y = 65 \text{ ksi}$, $F_u = 100 \text{ ksi}$ for 3/8" thru 5/8"

$F_y = 45 \text{ ksi}$, $F_u = 85 \text{ ksi}$ for 3/4"

Allowable Load Values

$$\text{Tension} = 0.33 \times F_u \times A_{nom}$$

$$\text{Shear} = 0.17 \times F_u \times A_{nom}$$

Ultimate Load Values

$$\text{Tension} = 0.75 \times F_u \times A_{nom}$$

$$\text{Shear} = 0.45 \times F_u \times A_{nom}$$

2 Use lower value of either bond/concrete capacity or steel strength.

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

HIT-RE 500 Ultimate Bond Strength and Steel Strength for Rebar in Concrete¹

Nominal Rebar Size	Embed. Depth in. (mm)	Concrete Compressive Strength						Grade 60 Rebar	
		$f'_c = 2000 \text{ psi (13.8 MPa)}$			$f'_c = 4000 \text{ psi (27.6 MPa)}$				
		Ultimate Bond Strength lb (kN)	Embed. to Develop Yield Strength ¹ in. (mm)	Embed. to Develop Tensile Strength ¹ in. (mm)	Ultimate Bond Strength lb (kN)	Embed. to Develop Yield Strength ¹ in. (mm)	Embed. to Develop Tensile Strength ¹ in. (mm)	Yield Strength lb (kN)	Tensile Strength lb (kN)
#3	3-3/8 (86)	10105 (45.0)	2-1/4 (57)	3-3/8 (86)	10810 (48.1)	2-1/8 (54)	3-1/4 (84)	6600 (29.4)	9900 (44.0)
	4-1/2 (114)	10920 (48.6)			10810 (48.1)				
#4	4-1/2 (114)	15980 (71.1)	3-3/8 (86)	5-5/8 (143)	18540 (82.5)	3 (76)	4-3/8 (111)	12000 (53.4)	18000 (80.1)
	6 (152)	18830 (83.8)			18655 (83.0)				
#5	5-5/8 (143)	20630 (91.8)	5-1/8 (130)	8-7/8 (225)	27790 (123.6)	3-7/8 (98)	5-3/4 (146)	18600 (82.7)	27900 (124.1)
	7-1/2 (191)	24870 (110.6)			27790 (128.6)				
#6	6-3/4 (171)	33695 (149.9)	5-3/8 (136)	9-3/8 (238)	44675 (198.7)	4 (102)	6 (152)	26400 (117.4)	39600 (176.2)
	9 (229)	38960 (173.3)			44870 (200.0)				
#7	7-7/8 (200)	40525 (180.3)	7 (178)	12-3/8 (314)	59340 (264.0)	4-7/8 (124)	7-1/4 (184)	36000 (160.1)	54000 (240.2)
	10-1/2 (267)	48460 (215.6)			61720 (274.6)				
#8	9 (229)	63940 (284.4)	8-1/4 (210)	12-7/8 (327)	72820 (323.9)	5-7/8 (149)	8-7/8 (225)	47400 (210.9)	71100 (316.3)
	12 (305)	69610 (309.7)			72950 (324.5)				
#9	10-1/8 (257)	72245 (321.4)	8-1/2 (216)	13 (330)	81235 (361.4)	7-1/2 (191)	12 (305)	60000 (266.9)	90000 (400.4)
	13-1/2 (343)	94205 (419.1)			84015 (373.7)				
#10	11-1/4 (286)	92000 (409.3)	9-3/8 (238)	17-7/8 (454)	96725 (430.3)	8-7/8 (225)	14 (356)	76200 (339.0)	114300 (508.5)
	15 (381)	95850 (426.4)			97070 (431.8)				
#11	12-3/8 (314)	118615 (527.6)	9-7/8 (251)	18-3/4 (476)	123120 (547.7)	9-1/2 (241)	16-1/2 (419)	93600 (416.4)	140400 (624.6)
	16-1/2 (419)	123570 (549.7)			123790 (550.7)				

¹ Based on comparison of average ultimate adhesive bond test values versus minimum yield and ultimate tensile strength of rebar. For more information, contact Hilti.

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7HIT-RE 500 Bond Strength and Steel Strength for Metric Rebar in Concrete (Canada Only)^{1, 2, 3, 4, 5, 6, 7}

Rebar Size	Embedment Depth mm (in)	HIT-RE 500 Tensile Bond Strength				Strength Properties of Metric Rebar	
		$f'_c = 14 \text{ MPa}$		$f'_c = 28 \text{ MPa}$		$f_y = 400 \text{ MPa}$	$f_u = 600 \text{ MPa}$
		Ultimate Bond kN (lb)	Allowable Bond kN (lb)	Ultimate Bond kN (lb)	Allowable Bond kN (lb)	Yield Strength kN (lb)	Tensile Strength kN (lb)
10M	115 (4-1/2)	71.1 (15980)	17.8 (3995)	82.5 (18540)	20.6 (4635)	40 (8990)	60 (13490)
	150 (6)	83.8 (18830)	20.9 (4705)	83.0 (18655)	20.7 (4665)		
15M	145 (5-5/8)	91.8 (20630)	22.9 (5155)	123.7 (27810)	30.9 (6950)	80 (17985)	120 (26975)
	190 (7-1/2)	110.6 (24870)	27.6 (6215)	123.6 (27790)	30.9 (6945)		
20M	200 (7-7/8)	180.3 (40525)	45.1 (10130)	264 (59340)	66 (14835)	120 (26975)	180 (40465)
	265 (10-1/2)	215.6 (48460)	53.9 (12115)	274.6 (61720)	68.6 (15430)		
25M	230 (9)	284.4 (63940)	71.0 (15985)	323.9 (72820)	81.0 (18205)	200 (44960)	300 (67440)
	305 (12)	309.7 (69610)	77.4 (17400)	324.5 (72950)	81.1 (18235)		
30M	260 (10-1/8)	321.4 (72245)	80.3 (18060)	361.4 (81235)	90.3 (20305)	280 (62945)	420 (94415)
	345 (13-1/2)	419.1 (94205)	104.8 (23550)	373.7 (84015)	93.4 (21000)		
35M	315 (12-3/8)	527.6 (118615)	131.9 (29650)	547.7 (123120)	136.9 (30780)	400 (89920)	600 (134880)
	420 (16-1/2)	549.7 (123570)	137.4 (30890)	550.7 (123790)	137.6 (30945)		

1 Based on minimum steel strength and nominal cross-sectional area of rebar.

2 Use lesser value of bond strength or steel strength.

3 Minimum concrete thickness must be equal to 1.5 times the anchor embedment.

4 Testing done with Imperial rebar in same size holes.

5 Allowable tension for adhesive bond based on a safety factor of 4.0.

6 For anchor spacing and edge distance guidelines, please refer to the following pages.


7 Ultimate tensile concrete/bond loads represent the average values obtained in testing.

HIT-RE 500 Ultimate Tensile Strength for Smooth Epoxy Coated Dowel Bars in Concrete $\geq 2410 \text{ psi} (15.9 \text{ MPa})$

Anchor Diameter in. (mm)	Drill Bit Diameter in. (mm)	Embedment Depth in. (mm)	Ultimate Tensile Load lb (kN)
1 (25.4)	1-1/8 (29)	9 (229)	40385 (179.7)
1-1/4 (31.8)	1-3/8 (34.9)		
1-1/2 (38.1)	1-5/8 (41)		

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

Anchor Spacing and Edge Distance Guidelines in Concrete



Anchor Spacing Adjustment Factors

s = Actual spacing
 h_{ef} = Actual embedment
 $s_{min} = 0.5 h_{ef}$
 $s_{cr} = 1.5 h_{ef}$

Edge Distance Adjustment Factors

c = Actual edge distance
 h_{ef} = Actual embedment
 $c_{min} = 0.5 h_{ef}$ Tension and shear
 $c_{cr} = 1.5 h_{ef}$ Tension
 $= 2.0 h_{ef}$ Shear
 \perp = Perpendicular to edge
 \parallel = Parallel to edge



Note: Tables apply for listed embedment depths. Reduction factors for other embedment depths must be calculated using equations below.

Spacing Tension/Shear

$$s_{min} = 0.5 h_{ef}, s_{cr} = 1.5 h_{ef}$$

$$f_A = 0.3(s/h_{ef}) + 0.55$$

for $s_{cr} > s > s_{min}$

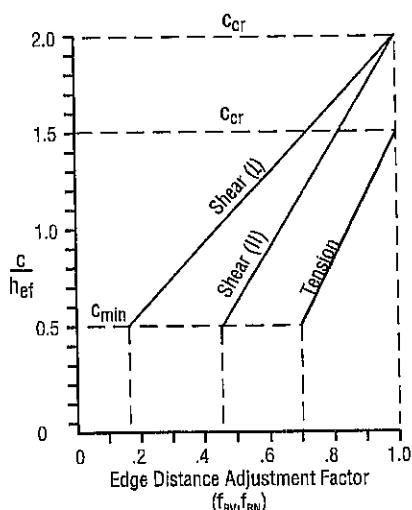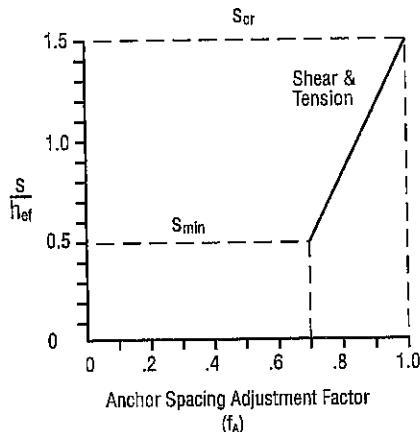

Edge Distance Tension

$$c_{min} = 0.5 h_{ef}, c_{cr} = 1.5 h_{ef}$$

$$f_{RN} = 0.3(c/h_{ef}) + 0.55$$

for $c_{cr} > c > c_{min}$

Edge Distance Shear (\perp toward edge)

$$c_{min} = 0.5 h_{ef}, c_{cr} = 2.0 h_{ef}$$

$$f_{RV1} = 0.54(c/h_{ef}) - 0.09$$

for $c_{cr} > c > c_{min}$

Edge Distance Shear (\parallel to or away from edge)

$$c_{min} = 0.5 h_{ef}, c_{cr} = 2.0 h_{ef}$$

$$f_{RV2} = 0.36(c/h_{ef}) + 0.28$$

for $c_{cr} > c > c_{min}$

Load Adjustment Factors for 3/8" Diameter Anchor									
Anchor Diameter:		3/8" diameter							
Adjustment Factor	Spacing Tension/Shear, f_A	Edge Distance Tension, f_{RN}		Edge Distance Shear, f_{RV1} (\perp toward edge)		Edge Distance Shear, f_{RV2} (\parallel to or away from edge)			
Embed. Depth (in.)	1-3/4	3-3/8	4-1/2	1-3/4	3-3/8	4-1/2	1-3/4	3-3/8	4-1/2
Spacing (s)/Edge Distance (c), in.	7/8	0.70		0.70		0.18		0.46	
	1	0.72		0.72		0.22		0.49	
	1 11/16	0.84	0.70	0.84	0.70	0.43	0.18	0.63	0.46
	2	0.89	0.73	0.89	0.73	0.53	0.23	0.69	0.49
	2 1/4	0.94	0.75	0.70	0.94	0.75	0.70	0.60	0.27
	2 5/8	1.00	0.78	0.73	1.00	0.78	0.73	0.72	0.33
	3		0.82	0.75		0.82	0.75	0.84	0.39
	3 1/2		0.86	0.78		0.86	0.78	1.00	0.47
	4		0.91	0.82		0.91	0.82	0.55	0.39
	5 1/16		1.00	0.89		1.00	0.89	0.72	0.52
	5 1/2			0.92			0.92	0.79	0.57
	6			0.95			0.95	0.87	0.63
	6 3/4			1.00			1.00	0.72	0.82
	8							0.87	0.92
	9							1.00	1.00

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7**Anchor Spacing and Edge Distance Guidelines in Concrete**

Note: Tables apply for listed embedment depths. Reduction factors for other embedment depths must be calculated using equations below.

Load Adjustment Factors for 1/2" Diameter Anchor									
Anchor Diameter:		1/2" diameter							
Adjustment Factor	Spacing Tension/Shear, f_A	Edge Distance Tension, f_{RN}		Edge Distance Shear, f_{RV1} (\perp toward edge)		Edge Distance Shear, f_{RV2} (ll to or away from edge)			
Embed. Depth (in.)	2-1/4	4-1/2	6	2-1/4	4-1/2	6	2-1/4	4-1/2	6
Spacing (s)/Edge Distance (c), in.	1								
	1-1/8	0.70		0.70		0.18		0.46	
	1-1/2	0.75		0.75		0.27		0.52	
	1-3/4	0.78		0.78		0.33		0.56	
	2	0.82		0.82		0.39		0.60	
	2-1/4	0.85	0.70	0.85	0.70	0.45	0.18	0.64	0.46
	2-1/2	0.88	0.72	0.88	0.72	0.51	0.21	0.68	0.48
	3	0.95	0.75	0.70	0.95	0.75	0.63	0.27	0.76
	3-3/8	1.00	0.78	0.72	1.00	0.78	0.72	0.32	0.82
	4		0.82	0.75		0.82	0.75	0.87	0.55
	4-1/2		0.85	0.78		0.85	0.78	1.00	0.45
	5		0.88	0.80		0.88	0.80	0.51	0.36
	6		0.95	0.85		0.95	0.85	0.63	0.45
	6-3/4		1.00	0.89		1.00	0.89	0.72	0.52
	7			0.90		0.90		0.75	0.54
	8			0.95		0.95		0.87	0.63
	9			1.00		1.00		0.72	0.52
	10							0.81	0.52
	11							0.90	0.54
	12							1.00	0.52

Spacing Tension/Shear	
$s_{min} = 0.5 h_{ef}$	$s_{cr} = 1.5 h_{ef}$
$f_A = 0.3(s/h_{ef}) + 0.55$	for $s_{cr} > s > s_{min}$
Edge Distance Tension	
$c_{min} = 0.5 h_{ef}$	$c_{cr} = 1.5 h_{ef}$
$f_{RN} = 0.3(c/h_{ef}) + 0.55$	for $c_{cr} > c > c_{min}$
Edge Distance Shear (\perp toward edge)	
$c_{min} = 0.5 h_{ef}$	$c_{cr} = 2.0 h_{ef}$
$f_{RV1} = 0.54(c/h_{ef}) - 0.09$	for $c_{cr} > c > c_{min}$
Edge Distance Shear (ll to or away from edge)	
$c_{min} = 0.5 h_{ef}$	$c_{cr} = 2.0 h_{ef}$
$f_{RV2} = 0.36(c/h_{ef}) + 0.28$	for $c_{cr} > c > c_{min}$

Load Adjustment Factors for 5/8" and 3/4" Diameter Anchors									
Anchor Diameter		5/8" diameter				3/4" diameter			
Adjustment Factor	Spacing Tension/Shear, f_A	Edge Distance Tension, f_{RN}		Edge Distance Shear, f_{RV1} (\perp toward edge)		Edge Distance Shear, f_{RV2} (ll to or away from edge)		Spacing Tension/Shear, f_A	Edge Distance Tension, f_{RN}
Embed. Depth (in.)	2-7/8	5-5/8	7-1/2	2-7/8	5-5/8	7-1/2	2-7/8	5-5/8	7-1/2
Spacing (s)/Edge Distance (c), in.	1-7/16	0.70		0.70		0.18		0.46	
	1-11/16	0.73		0.73		0.23		0.49	
	2	0.76		0.76		0.29		0.53	
	2-13/16	0.84	0.70	0.84	0.70	0.44	0.18	0.63	0.46
	3-3/8	0.90	0.73	0.90	0.73	0.54	0.23	0.70	0.50
	3-3/4	0.94	0.75	0.94	0.75	0.70	0.61	0.72	0.52
	4-5/16	1.00	0.78	0.72	1.00	0.78	0.72	0.32	0.82
	4-1/2		0.79	0.73		0.79	0.73	0.34	0.84
	5-1/16		0.82	0.75		0.82	0.75	0.86	0.60
	5-5/8		0.85	0.78		0.85	0.78	0.97	0.45
	5-3/4		0.86	0.78		0.86	0.78	1.00	0.46
	6-3/4		0.91	0.82		0.91	0.82	0.56	0.55
	8-7/16	1.00	0.89	1.00	0.89	0.72	0.52	0.82	0.69
	10-1/8		0.96		0.96		0.88	0.64	0.93
	11-1/4		1.00		1.00		1.00	0.72	1.00
	12					0.77		0.86	
	13-1/2					0.88		0.93	
	15					1.00		1.00	
	16								0.87
	18								1.00

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

Anchor Spacing and Edge Distance Guidelines in Concrete

Note: Tables apply for listed embedment depths. Reduction factors for other embedment depths must be calculated using equations below.

Load Adjustment Factors for 7/8" Diameter Anchor												
7/8" diameter												
Anchor Diameter:	Adjustment Factor			Spacing Tension/Shear, f_A		Edge Distance Tension, f_{RN}		Edge Distance Shear, f_{RV1} (\perp toward edge)		Edge Distance Shear, f_{RV2} (II to or away from edge)		
Embed. Depth (in.)	4	7-7/8	10-1/2	4	7-7/8	10-1/2	4	7-7/8	10-1/2	4	7-7/8	10-1/2
Spacing (s)/Edge Distance (c), in.	2	0.70		0.70		0.18		0.46				
	2-1/2	0.74		0.74		0.25		0.51				
	3	0.78		0.78		0.32		0.55				
	3-1/2	0.81		0.81		0.38		0.60				
	3-15/16	0.85	0.70	0.85	0.70	0.44	0.18	0.63	0.46			
	4-1/2	0.89	0.72	0.89	0.72	0.52	0.22	0.69	0.49			
	5	0.93	0.74	0.93	0.74	0.59	0.25	0.73	0.51			
	5-1/4	0.94	0.75	0.90	0.75	0.62	0.27	0.76	0.52	0.46		
	6	1.00	0.78	0.72	1.00	0.78	0.72	0.32	0.82	0.55	0.49	
	6-1/2		0.80	0.74		0.80	0.74	0.79	0.36	0.87	0.58	0.50
	7		0.82	0.75		0.82	0.75	0.86	0.39	0.91	0.60	0.52
	8		0.85	0.78		0.85	0.78	1.00	0.46	1.00	0.65	0.55
	10		0.93	0.84		0.93	0.84		0.60	0.42	0.74	0.62
	11-13/16		1.00	0.89		1.00	0.89		0.72	0.52	0.82	0.69
	12			0.89			0.89		0.73	0.53	0.83	0.69
	14			0.95			0.95		0.87	0.63	0.92	0.76
	15-3/4			1.00			1.00		1.00	0.72	1.00	0.82
	18							0.84			0.90	
	20							0.94			0.97	
	21							1.00			1.00	

Spacing Tension/Shear												
$s_{min} = 0.5 h_{ef}, s_{cr} = 1.5 h_{ef}$												
$f_A = 0.3(s/h_{ef}) + 0.55$												for $s_{cr} > s > s_{min}$
Edge Distance Tension												
$c_{min} = 0.5 h_{ef}, c_{cr} = 1.5 h_{ef}$												
$f_{RN} = 0.3(c/h_{ef}) + 0.55$												for $c_{cr} > c > c_{min}$
Edge Distance Shear (\perp toward edge)												
$c_{min} = 0.5 h_{ef}, c_{cr} = 2.0 h_{ef}$												
$f_{RV1} = 0.54(c/h_{ef}) - 0.09$												for $c_{cr} > c > c_{min}$
Edge Distance Shear (II to or away from edge)												
$c_{min} = 0.5 h_{ef}, c_{cr} = 2.0 h_{ef}$												
$f_{RV2} = 0.36(c/h_{ef}) + 0.28$												for $c_{cr} > c > c_{min}$


Load Adjustment Factors for 1" and 1-1/4" Diameter Anchors												
1" diameter												
Anchor Diameter:	Adjustment Factor			Spacing Tension/Shear, f_A		Edge Distance Tension, f_{RN}		Edge Distance Shear, f_{RV1} (\perp toward edge)		Edge Distance Shear, f_{RV2} (II to or away from edge)		
Embed. Depth (in.)	4-1/2	9	12	4-1/2	9	12	4-1/2	9	12	5-5/8	11-1/4	15
Spacing (s)/Edge Distance (c), in.	2-1/4	0.70		0.70		0.18		0.46				
	2-3/4	0.73		0.73		0.24		0.50		0.70		0.18
	3	0.75		0.75		0.27		0.52		0.71		0.20
	4	0.82		0.82		0.39		0.60		0.76		0.29
	4-1/2	0.85	0.70	0.85	0.70	0.45	0.18	0.64	0.46	0.79		0.57
	5	0.88	0.72	0.88	0.72	0.51	0.21	0.68	0.48	0.82		0.60
	5-5/8	0.93	0.74	0.93	0.74	0.59	0.25	0.73	0.51	0.85		0.64
	6	0.95	0.75	0.90	0.75	0.63	0.27	0.76	0.52	0.87		0.66
	6-3/4	1.00	0.78	0.72	1.00	0.78	0.72	0.32	0.82	0.55		0.50
	7-1/2		0.80	0.74		0.80	0.74	0.81	0.36	0.88		0.48
	8-1/4		0.83	0.76		0.83	0.76	0.90	0.41	0.84		0.57
	9		0.85	0.78		0.85	0.78	1.00	0.45	0.90		0.52
	10		0.88	0.80		0.88	0.80	0.51	0.36	0.68		0.47
	11		0.92	0.83		0.92	0.83	0.57	0.41	0.72		0.42
	12		0.95	0.85		0.95	0.85	0.63	0.45	0.76		0.37
	13-1/2		1.00	0.89		1.00	0.89	0.72	0.52	0.82		0.32
	14			0.90		0.90		0.75	0.54	0.84		0.31
	16-7/8		0.97			0.97		0.92	0.67	0.96		0.27
	18		1.00			1.00		1.00	0.72	1.00		0.24
	20							0.81		0.88		0.22
	22-1/2							0.92		1.00		0.20
	24											0.18
	27											0.15
	30											0.12

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7

Resistance of HIT-RE 500 to Chemicals

Chemical	Chemicals Tested	Resistant	Not Resistant
Alkalinize (Base material concrete)	Concrete drilling mud (10%) pH=12.6	+	
	Concrete drilling mud (10%) pH=13.2	+	
	Concrete potash solution (10%) pH=14.0	+	
Acids	Acetic acid (10%) { concrete was dissolved by acid	-	
	Nitric acid (10%)	-	
	Hydrochloric acid (10%) 3 month -	-	
	Sulfuric acid (10%)	-	
Solvents	Benzyl alcohol	-	
	Ethanol	-	
	Ethyl acetate	-	
	Methyl ethyl ketone (MEK)	-	
	Trichlorethylene	-	
Chemicals used on job sites	Xylene (mixture)	+	
	Concrete plasticizer	+	
	Diesel oil	+	
	Oil	+	
	Petrol	+	
Environmental Chemicals	Oil for form work (forming oil)	+	
	Salt water	+	
	de-mineralized water	+	
	salt spraying test	+	
Environmental Chemicals	SO ₂	+	
	Environment / Weather	+	

Influence of Temperature on Bond Strength

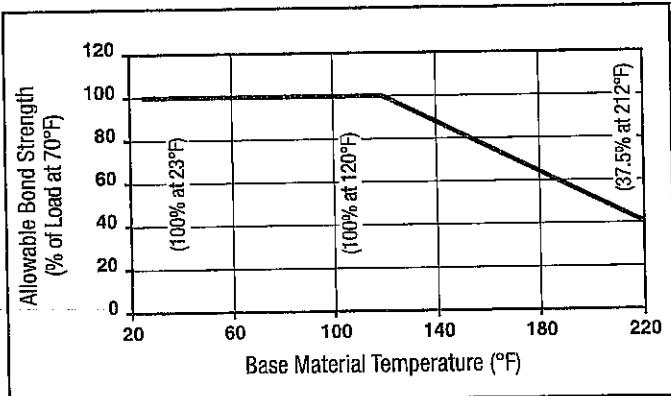

Note: Test procedure involves the concrete being held at the elevated temperature for 24 hours then removing it from the controlled environment and testing to failure.

Long term creep test in accordance with AC58 is available; please contact Hilti Technical Services.

Samples of the HIT-RE 500 resin were immersed in the various chemical compounds for up to one year. At the end of the test period, the samples were analyzed. Any samples showing no visible damage and having less than a 25% reduction in bending (flexural) strength were classified as "Resistant." Samples that were heavily damaged or destroyed were classified as "Not Resistant."

Note: In actual use, the majority of the resin is encased in the base material, leaving very little surface area exposed.

Full Cure Time Table1 (100% of working load)

Base Material Temperature °F	°C	Approx. Full Curing Time
23	-5	72 hours
32	0	50 hours
50	10	24 hours
68	20	12 hours
86	30	8 hours
104	40	4 hours

Initial Cure Time Table1 (25% of working load)

Base Material Temperature °F	°C	Approx. Initial Cure Time
23	-5	36 hours
32	0	25 hours
50	10	12 hours
68	20	6 hours
86	30	4 hours
104	40	2 hours










Gel Time Table1 (Approximate)

Base Material Temperature °F	°C	Approx. Gel Time
23	-5	4 hours
32	0	3 hours
50	10	2 hours
68	20	30 minutes
86	30	20 minutes
104	40	12 minutes

1 Minimum product temperature must be maintained above 41°F (5°C) prior/during installation.

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

4.2.7.4 Installation Instructions

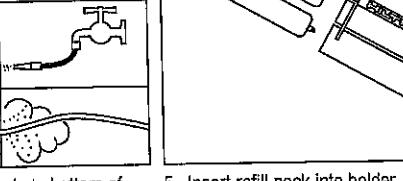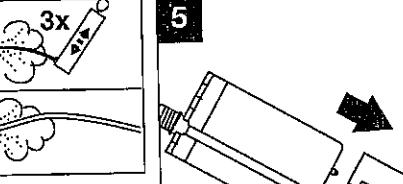






1. Drill anchor hole using carbide or diamond core bits.

2. Insert air nozzle to bottom of hole and blow out hole using a pump, or compressed air. For underwater applications and diamond coring, flush until water runs clear from hole.

3. Clean hole with a nylon or wire brush. Proper hole cleaning is essential.

4. Insert air nozzle to bottom of hole and blow out hole using a pump, or compressed air. For underwater applications and diamond coring, flush until water runs clear from hole. Remove water (e.g. vacuum or comp. air).

5. Insert refill pack into holder. Remove cap covering threaded projection.







6. Screw on static mixer.

7. Put holder into dispenser.





8. Discard first three trigger pulls of adhesive from each refill pack or cartridge.

9. Inject adhesive into hole starting at the bottom until 1/2 to 2/3 full. Use mixer filler tube extensions when needed to reach the hole bottom.





10. Unlock dispenser







Rod



Insert



Rebar



9. Insert rod, threaded insert or rebar. Twist during installation.

10. Fastener may be adjusted during specified gel time.

11. Do not disturb anchor between specified gel time and initial cure time. At the initial cure time the fastener has 25% of full working load. Work may proceed (e.g. tying rebar, setting steel) which will not exceed 25% of the full working load. Do not torque anchor.

12. After full cure time, apply specified torque as required to secure items to be fastened. Do not exceed maximum torque specified.

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7

HIT HIT-RE 500 Volume Charts

Threaded Rod Installation

Rod Diameter (in.)	Drill Bit ¹ Diameter (in.)	Adhesive Volume Required per Inch of embedment (in ³)
1/4	5/16	0.055
3/8	7/16	0.095
1/2	9/16	0.133
5/8	3/4	0.261
3/4	7/8	0.326
7/8	1	0.391
1	1-1/8	0.478
1-1/4	1-3/8	0.626

EXAMPLE:

Determine approximate fastenings for 5/8" rod embedded 10" deep.

$$\begin{aligned} 10 \times 0.261 &= 2.61 \text{ in}^3 \text{ of adhesive per anchor} \\ 16.5 \div 2.61 &= 6 \text{ fastenings per small cartridge} \\ 81.8 \div 2.61 &\approx 31 \text{ fastenings per jumbo cartridge} \end{aligned}$$

Rebar Installation

Rod Diameter (in.)	Drill Bit ¹ Diameter (in.)	Adhesive Volume Required per Inch of embedment (in ³)
#3 or 3/8	1/2	0.110
#4 or 1/2	5/8	0.146
#5 or 5/8	3/4	0.176
#6 or 3/4	7/8	0.218
#7 or 7/8	1	0.252
#8 or 1	1-1/8	0.299
#9 or 1-1/8	1-3/8	0.601
#10 or 1-1/4	1-1/2	0.659
#11 or 1-3/8	1-3/4	1.037

Metric Rebar Installation (Canada Only)

Bar Diameter	Drill Bit ¹ Diameter (in.)	Adhesive Volume Required per Inch of embedment (in ³)
10M	5/8	0.186
15M	3/4	0.170
20M	1	0.388
25M	1-1/8	0.289
30M	1-3/8	0.481
35M	1-3/4	0.996


NOTE: Useable volume of HIT-RE 500 refill cartridge is 16.5 in³ (270 ml).

Useable volume of HIT-RE 500 medium refill cartridge is 26.9 in³ (440 ml).

Useable volume of HIT-RE 500 jumbo refill cartridge is 81.8 in³ (1340 ml).

¹ Rebar diameter may vary. Use smallest drill bit which will accommodate rebar.

4.2.7.5 Ordering Information

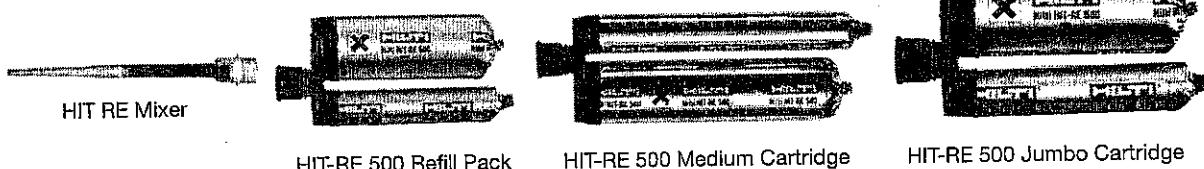

HIT Adhesives

Item No.	Description
340225	HIT-RE 500 11.1 oz (330 ml) Includes (1) Refill Pack and (1) Mixer with filler tube
369251	HIT-RE 500 MC 11.1 oz (330 ml) Includes (25) Refill Packs and (25) Mixers with filler tube
369110	HIT-RE 500 Medium 16.9 oz (500 ml) Includes (20) Refill Packs and (20) Mixers with filler tube
373958	HIT-RE 500 Jumbo 47.3 oz (1400 ml) Includes (4) Jumbo Refill Packs and (4) Mixers

4.2.7 HIT-RE 500 Epoxy Adhesive Anchoring System

Dispensers

Battery Powered

Item No.	Ordering designation	
3245363	ED3500 2.0 Ah kit	①

Manual


Item No.	Ordering designation	
371291	MD 1000 Manual Dispenser for HIT-ICE	②
229154	MD 2000 dispenser — includes foil pack holder	③
338853	MD 2500 Manual Dispenser	④
229170	Refill Holder Replacement for MD2000, ED 3500 or P-3000HY dispensers	⑤

Pneumatic Dispenser with 1/4" internally threaded compressed air coupling

Item No.	Ordering designation	
354180	P-3500 dispenser (for foil packs)	⑥
373959	HIT-P8000D pneumatic dispenser (for jumbo cartridges)	⑦
373960	Jumbo pack holder replacement for P8000D	

Mixers and Filler Tubes

Item No.	Ordering designation	Qty/pkg
337111	HIT-RE-M static mixer (suitable for foil pack and jumbo cartridges)	1

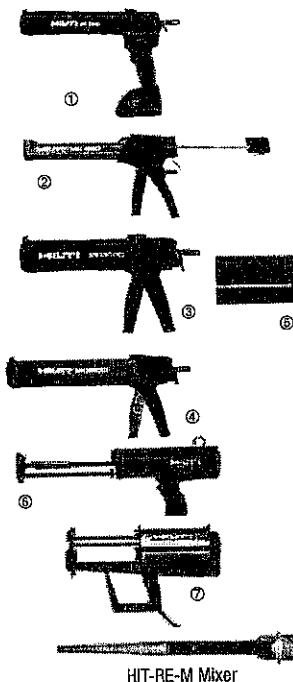

HIT-RE-M Mixer

HIT-RE 500 Epoxy Adhesive Anchoring System 4.2.7**Threaded Rods**

HAS Rods 5.8				HAS Super A193, B7 High Strength Rods			HAS-R Rods 304 Stainless Steel			HAS-R Rods 316 Stainless Steel		
Item No. (Box)	Master Carton (MC)	Description (in.)	Qty Box/MC	Item No.	Description	Qty Box	Item No.	Description	Qty Box	Item No.	Description	Qty Box
385417	3432178	3/8 x 3	10/360									
385418	3432179	3/8 x 4-3/8	10/240									
385419	3432180	3/8 x 5-1/8	20/240	68657	3/8x5-1/8	10	385462	3/8x5-1/8	10	3024335	3/8x5-1/8	1
385420	3432181	3/8-8	10/160				385463	3/8 x 8	10			
385421	3432182	3/8 x 12	10/90									
385422	3432183	1/2 x 3-1/8	10/240									
385423	3432184	1/2 x 4-1/2	10/160									
385424	3432185	1/2 x 6-1/2	20/160	68658	1/2x6-1/2	10	385464	1/2x6-1/2	10	3024336	1/2x6-1/2	1
385425	3432239	1/2 x 8	10/120				385465	1/2x8	1			
385426	3432186	1/2 x 10	10/120				385466	1/2x10	1			
										3024337	1/2x11	1
385427	3432187	1/2 x 12	10/80									
385428	3432188	5/8 x 8	20/80	333783	5/8x7-5/8	10	385467	5/8x7-5/8	10	333781	5/8x7-5/8	10
							385468	5/8x10	1			
385429	3432189	5/8 x 9	10/60							3024338	5/8x9	1
385430	3432190	5/8 x 12	10/60							3024339	5/8x12	1
385431	3432191	5/8 x 17	10/40									
385432	3432052	3/4 x 10	10/40	68660	3/4x9-5/8	5	385469	3/4x9-5/8	5	3024340	3/4x9-5/8	1
385433	3432163	3/4 x 11	10/30									
385434	3432164	3/4 x 12	10/30				385470	3/4x12	1			
385435	3432165	3/4 x 14	10/30	3006083	3/4 x 14	5	385471	3/4x14	1			
							385472	3/4x16	1			
385436	3432166	3/4 x 17	10/20									
385437	3432167	3/4 x 19	10/20									
385438	3432168	3/4 x 21	10/20									
385439	3432169	3/4 x 25	10/20									
385440	3432170	7/8 x 10	10/20	68661	7/8x10 (HDG) ¹	5	385473	7/8x10	1			
				3006077	7/8x12 (HDG) ¹	5						
385441	3432171	7/8 x 13	10/20	45259	7/8x16 (HDG) ¹	5						
385442	3432172	1 x 12	4/16	68662	1x12	5	385474	1x12	1	3024341	1x12	4/16
385443	3432173	1 x 14	2/16	3006079	1x14	5						
385444	3432174	1 x 16	2/12	3006080	1x16	5						
385445	3432175	1 x 20	2/12	3006081	1x21	5						
385446	3432176	1-1/4 x 16	4/8	333779	1-1/4x16	4						
385447	3432177	1-1/4 x 22	4/8									
				3006082	1-1/4x23	5						

1 Hot dipped galvanized (7/8" rod only). Coating thickness 2 mils (50.8 µm).

**HIS Internally Threaded Inserts**






HIS Item No.	HIS-R Item No.	Description	Useable Thread Length (in.)	Qty Box
258020	258029	3/8x4-1/4	1	10
258021	258030	1/2x5	1-3/16	5
258022	258031	5/8x6-5/8	1-1/2	5
258023	258032	3/4x8-1/4	2	5

In The United States

PAYMENT TERMS:	Net 30 days from date of invoice. Customer agrees to pay all costs incurred by Hilti in collecting any delinquent amounts, including attorney's fees.
FREIGHT:	All sales are F.O.B. Destination with transportation allowed via Hilti designated mode. Delivery dates are estimates only. Additional charges for expedited shipments, special handling requirements, and orders below certain dollar amounts shall be the responsibility of Customer. Fuel surcharges may apply depending on market conditions.
CREDIT:	All orders sold on credit are subject to Credit Department approval.
RETURN POLICY:	Products must be in saleable condition to qualify for return. Saleable condition is defined as unused items in original undamaged packaging and unbroken quantities and in as-new condition. All returns are subject to Hilti inspection and acceptance, and a \$125 restocking charge if returned more than 90 days after invoice date. Proof of purchase is required for all returned materials. Special order products and discontinued items are not eligible for return credit. Dated materials are only returnable in case quantity, and within 30 days after invoice date.
WARRANTY:	Hilti warrants that for a period of 12 months from the date it sells a product it will, at its sole option and discretion, refund the purchase price, repair, or replace such product if it contains a defect in material or workmanship. Absence of Hilti's receipt of notification of any such defect within this 12-month period shall constitute a waiver of all claims with regard to such product.
THE FOREGOING WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.	Hilti shall in no event be liable for, and Customer hereby agrees to indemnify Hilti against all claims related to special, direct, indirect, incidental, consequential, or any other damages arising out of or related to the sale, use, or inability to use the product.
ACCEPTANCE OF ORDER:	Acceptance is limited to the express terms contained herein, and terms are subject to change by Hilti without notice. Additional or different terms proposed by Customer are deemed material and are objected to and rejected, but such rejection shall not operate as a rejection of the offer unless it contains variances in the terms of the description, quantity, price or delivery schedule of the goods. Orders are not deemed "accepted" by Hilti unless and until it ships the associated items.
DOMESTIC ORIGIN:	Any non-domestic Hilti product will be so identified on shipping documents and invoices for customers who properly identify themselves as a federal government entity. All other customers may obtain such information by written request to Hilti, Inc., Contract Compliance, P.O. Box 21148, Tulsa, Oklahoma 74121. Hilti's Quality Department personnel are the only individuals authorized to warrant the country of origin of Hilti products.
BUSINESS SIZE:	Hilti is a large business.
PRICES:	Prices are those stated on the order, and unless otherwise noted are based on purchasing all items on the order — pricing for individual products may vary for purchases of different quantities or item combinations. Hilti does not maintain most favored customer records, makes no representation with respect to same, and rejects any price warranty terms proposed by Customer. Hilti's published net price list is subject to change without notice.
CONSENT TO JURISDICTION:	All transactions made pursuant hereto shall be deemed to have been made and entered into in Tulsa, Oklahoma. Any and all disputes arising directly or indirectly from such transactions shall be resolved in the courts of the County of Tulsa, State of Oklahoma, to the exclusion of any other court, and any resulting judgment may be enforced by any court having jurisdiction of such an action. All transactions shall be governed by and construed in accordance with the laws of the State of Oklahoma.
INDEMNIFICATION:	Customer hereby agrees to indemnify Hilti for any costs, including attorney's fees, incurred by Hilti as a result, in whole or in part, of any violation by Customer of any Federal, State or Local statute or regulation, or of any nationally accepted standard. It shall be Customer's sole responsibility to comply with all applicable laws and regulations regarding the handling, use, transportation, or disposal of products upon taking possession of same.
AUTHORIZATION:	HILTI LEGAL DEPARTMENT PERSONNEL ARE THE ONLY INDIVIDUALS AUTHORIZED TO MODIFY THESE TERMS AND CONDITIONS, WARRANT PRODUCT SUITABILITY FOR SPECIFIC APPLICATIONS, OR EXECUTE CUSTOMER DOCUMENTS, AND ANY SUCH ACTION IS NULL AND VOID UNLESS IN WRITTEN FORM SIGNED BY SUCH INDIVIDUAL.


In Canada

PAYMENT TERMS:	Net 30 days from date of invoice. Customer agrees to pay all costs incurred by Hilti in collecting delinquent amounts, if any, including reasonable attorney's fees.
FREIGHT:	Sales are F.O.B. Destination Point with transportation allowed via Hilti designated mode. Additional charges may apply for expedited delivery, special handling requirements, and order under certain limits. A fuel surcharge may apply depending on market conditions.
CREDIT:	All orders sold on credit are subject to Credit Department approval.
RETURN POLICY:	Product may be returned prepaid (unless otherwise authorized) to Hilti provided:
	i) it is returned by the original purchaser
	ii) it is not dated product returned more than 30 days after the original delivery date
	iii) it is not discontinued, clearance or special order product
	iv) it is unused, in original packaging and in unbroken quantities.
WARRANTY:	Hilti will inspect product and, if the above requirements are satisfied, will credit to customer the original purchase price. A 15% restocking fee may apply.
TITLE TO PRODUCT:	Title to product remains with Hilti until the total purchase price of product is paid.
PRICES:	Customer agrees to pay Hilti prices set out on invoice. Customer agrees to pay taxes as indicated on invoice unless Hilti receives acceptable exemption certificates.
INDEMNIFICATION:	Customer agrees to use product at own risk and to indemnify Hilti against all liabilities, including legal fees, to third parties arising out of the use or possession thereof. Hilti shall in no event be liable for special, incidental or consequential damages.
CHANGES:	Hilti sales personnel are not authorized to modify these Terms and Conditions or modify Customer's credit terms. Terms are subject to change by Hilti with reasonable notice to Customer.
CASH SALES:	Payment in full is due prior to goods being released.
QUOTATIONS:	All terms and conditions apply once customer agrees to purchase product. Quotations on special promotion products are only valid until end of promotion period.

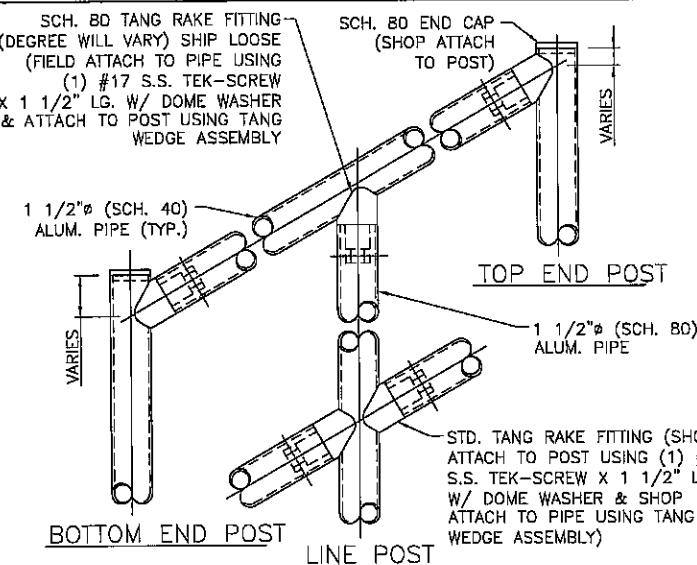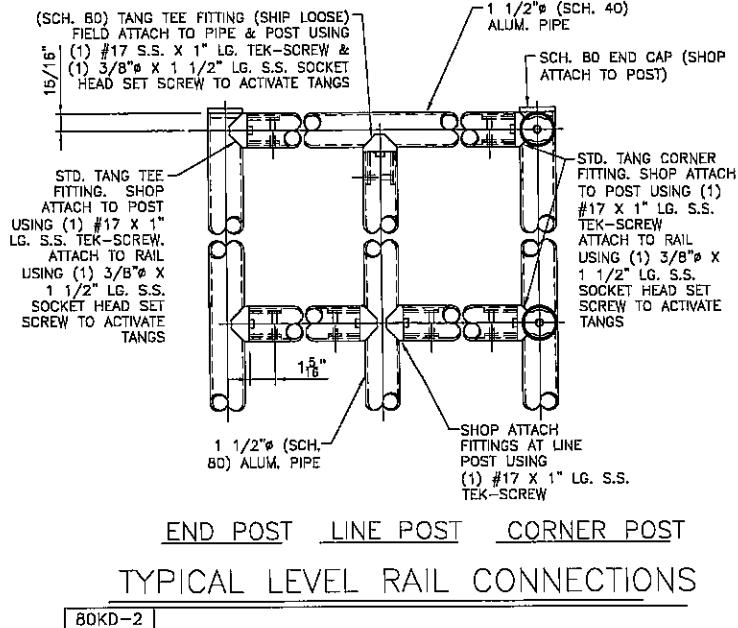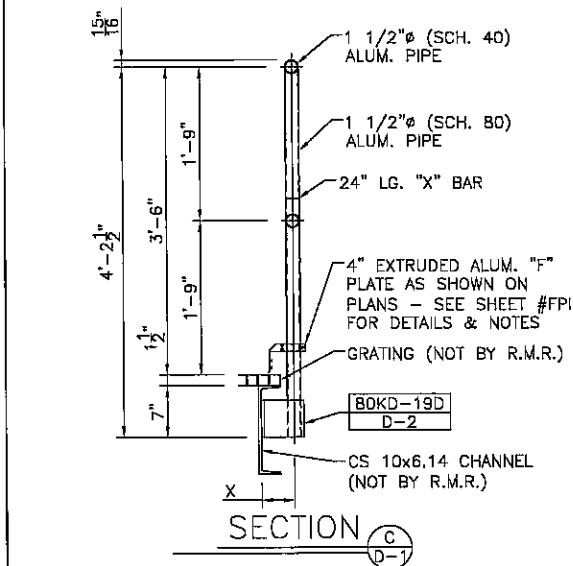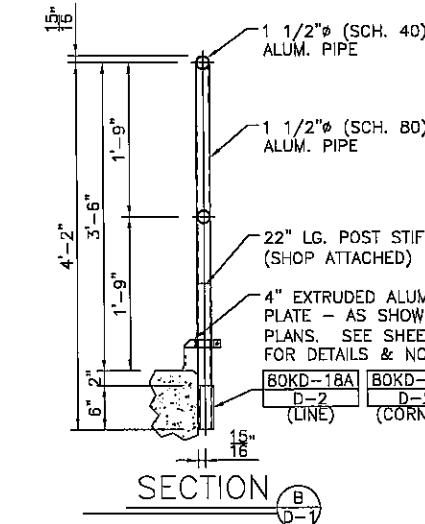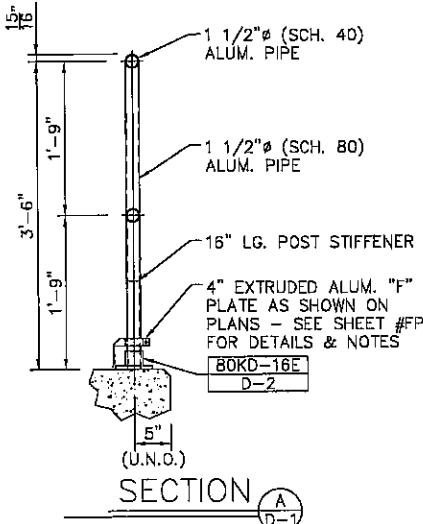


TYPICAL RAKE RAIL CONNECTIONS

BOKD-3

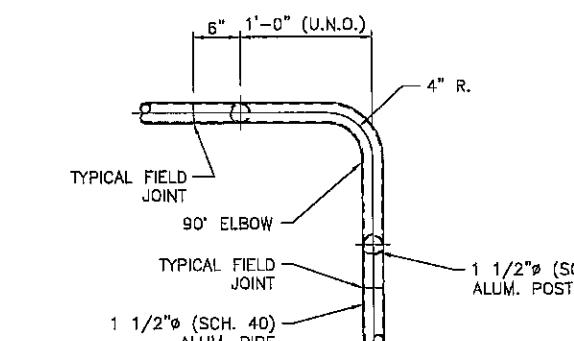


TYPICAL CORNER

BOKD-4

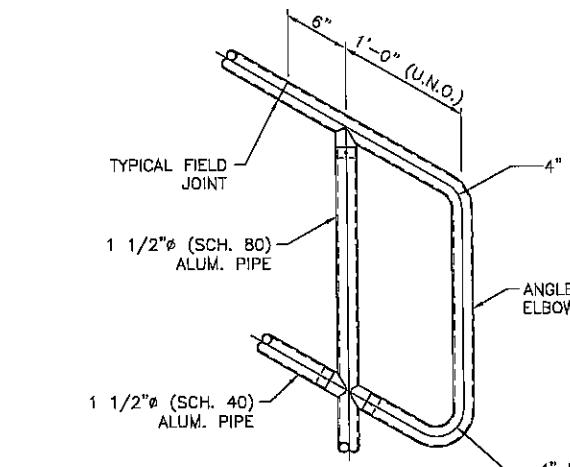


BOTTOM RAKE P-END

BOKD-5A

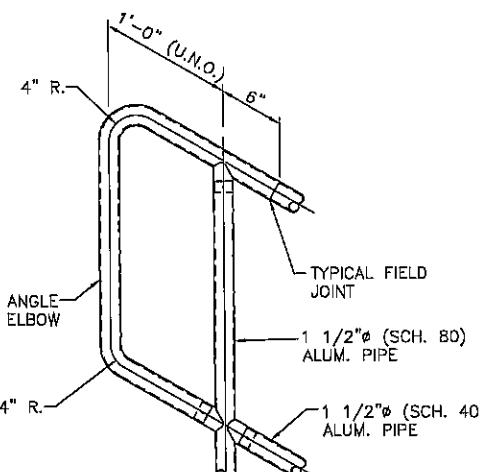


TOP RAKE P-END

BOKD-6A

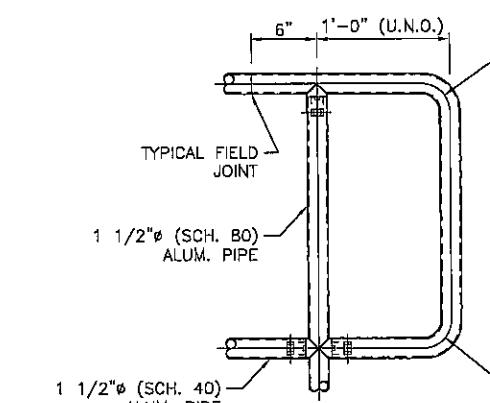

LEVEL P-END

BOKD-7A

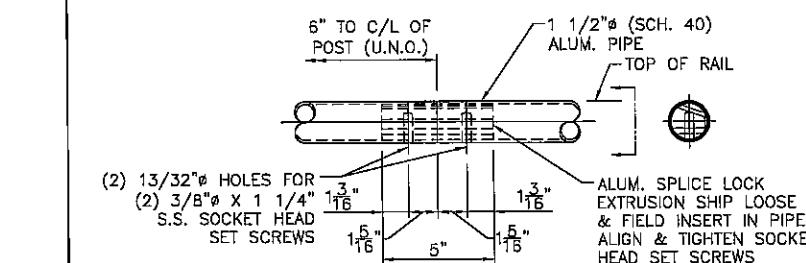

TYPICAL FIELD JOINT

BOKD-B (LOCATED ONLY WHERE NOTED)

GENERAL NOTES!

BOKD-1

- 1) ALL RAIL TO BE OF MECHANICAL CONSTRUCTION U.N.O..
- 2) ALL RAILS TO BE FABRICATED FROM 1 1/2" (SCH. 40) ALUMINUM PIPE (6105-T5 ALLOY).
- 3) ALL POSTS TO BE FABRICATED FROM 1 1/2" (SCH. 80) ALUMINUM PIPE (6105-T5 ALLOY).
- 4) ALL COMPONENTS TO BE 6105-T5 ALLOY.
- 5) ALL FASTENERS (SELF TAPPING SCREWS, BLIND RIVETS, MACHINE BOLTS, EXPANSION ANCHORS, ETC.) TO BE STAINLESS STEEL. (TYPE 304)
- 6) ALL RAILING SURFACES IN CONTACT WITH CONCRETE OR DISSIMILAR METALS SHALL RECEIVE ONE SHOP APPLIED COAT OF TNEVEC SERIES 46-465.
- 7) ALL BOLTS USED TO MOUNT RAILINGS TO FLOORS, WALLS, STEEL, ETC. ARE BY RAILING MFR.
- 8) ALL KICK PLATES ("F" TYPE TOE BOARD) SHALL BE SHIPPED LOOSE IN 24'-0" LG. STOCK LENGTHS FOR FIELD CUTTING & DRILLING AS REQ'D.
- 9) ALL POSTS ARE FURNISHED CUT TO LENGTH WITH FITTINGS ATTACHED (EXCEPT FOR TOP FITTING AT LEVEL & RAKE LINE POSTS).
- 10) PIPE FOR STRAIGHT RAIL IS FURNISHED IN 24'-0" STOCK LENGTHS FOR CUTTING & DRILLING AS REQ'D.
- 11) ELBOWS W/ A 4" C/L RADIUS ARE FURNISHED AS REQ'D. & MUST BE FIELD CUT TO FIT FIELD CONDITIONS.
- 12) ALL RAILS WHEN PROPERLY INSTALLED SHALL MEET OR EXCEED OSHA REQUIREMENTS.
- 13) MAX. POST SPACING TO BE 6'-0" C/C.
- 14) ALL RAIL IS TO BE FINISHED IN ACCORDANCE WITH THE ALUMINUM ASSOCIATION'S DESIGNATION M10C22A41.
- 15) DIMENSIONS SHOWN THROUGHOUT THIS SET ARE APPROXIMATE AND SHALL BE FIELD VERIFIED DURING ERECTION.



ROCKY MOUNTAIN RAILINGS
11839 E 51st AVE DENVER, CO 80239
PHONE (303) 432-0003 FAX (303) 432-2038

DESIGNER GSM INC.

CUSTOMER WEAVER CONSTRUCTION

CONTRACTOR

DR. DDB DATE 7/26/11 SCALE AS NOTED

ERCTION BY OTHERS


FIELD CHECKED BY OTHERS

CUSTOMER P.O./JOB 2908-05470



R1940

D-1

REFER TO CONTRACT DRAWINGS PG. NO.

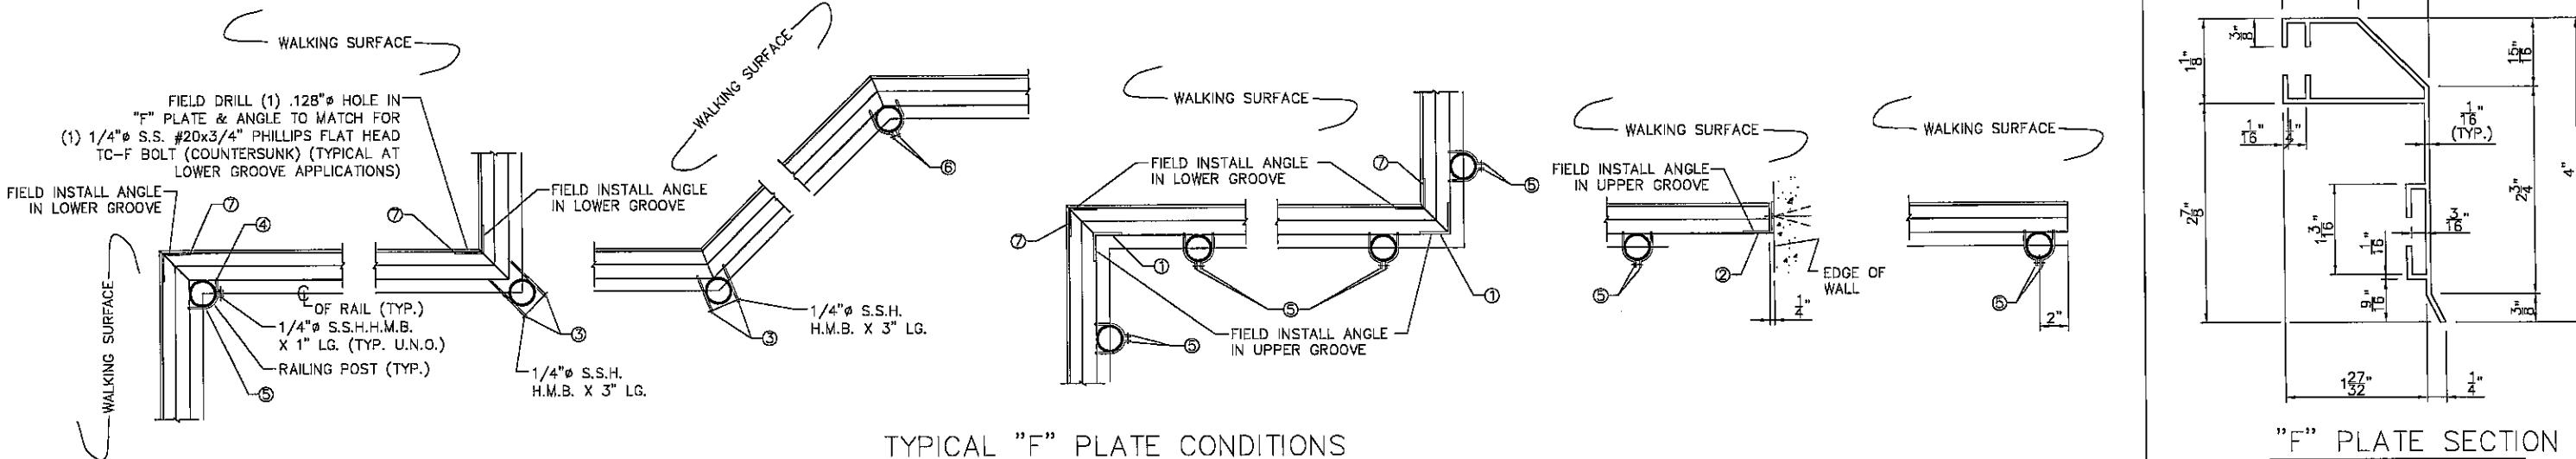

"F" PLATE SECTION

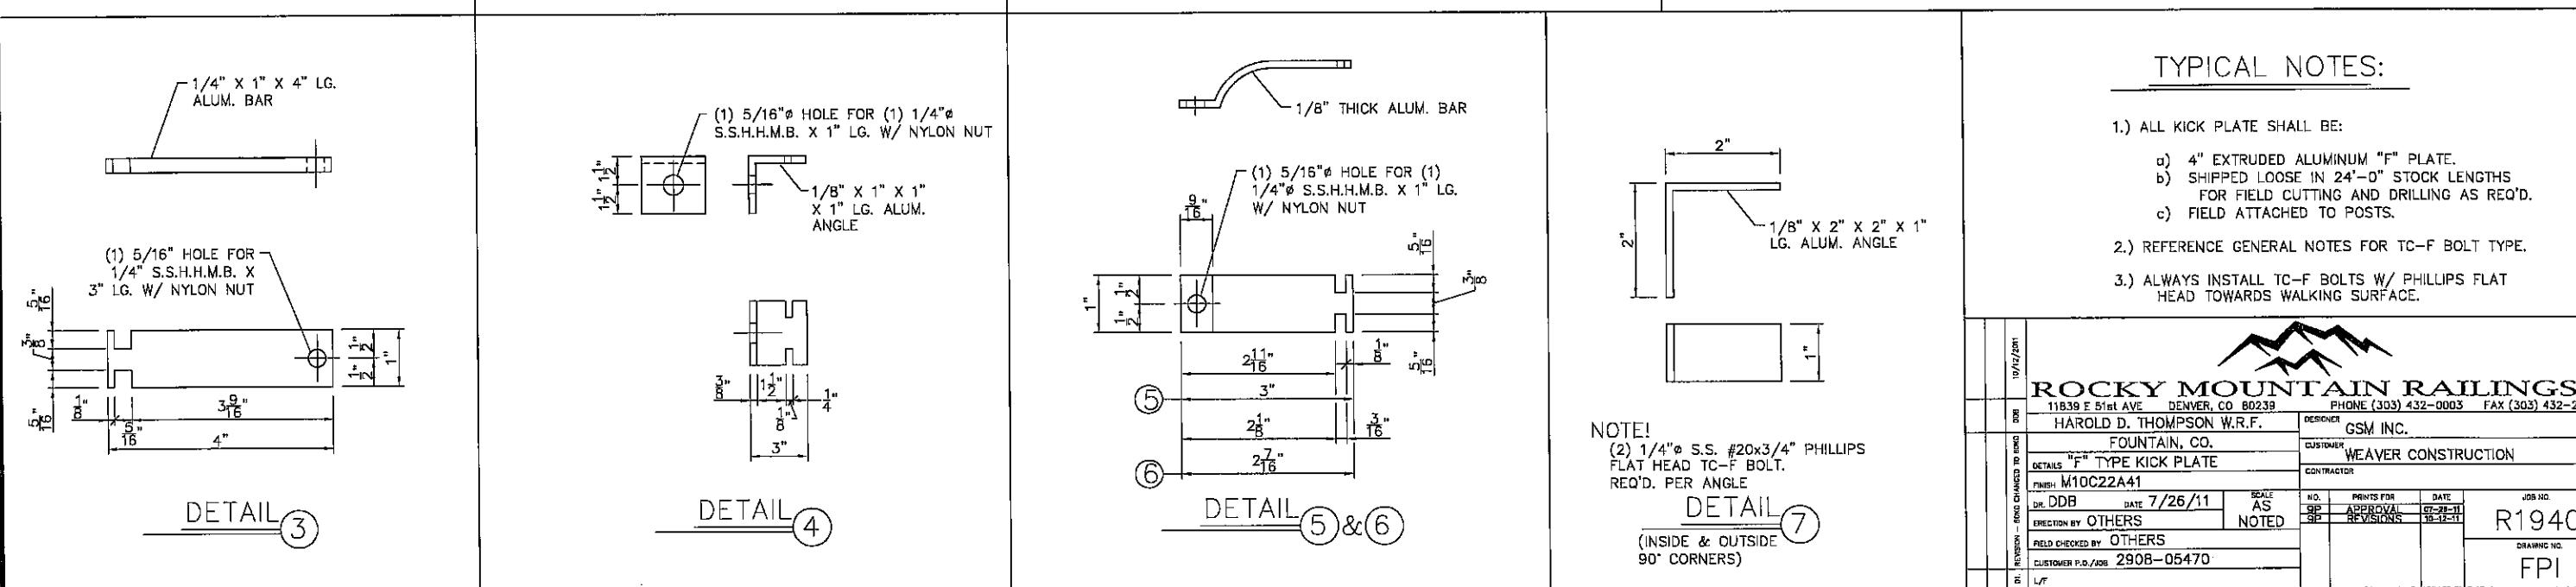
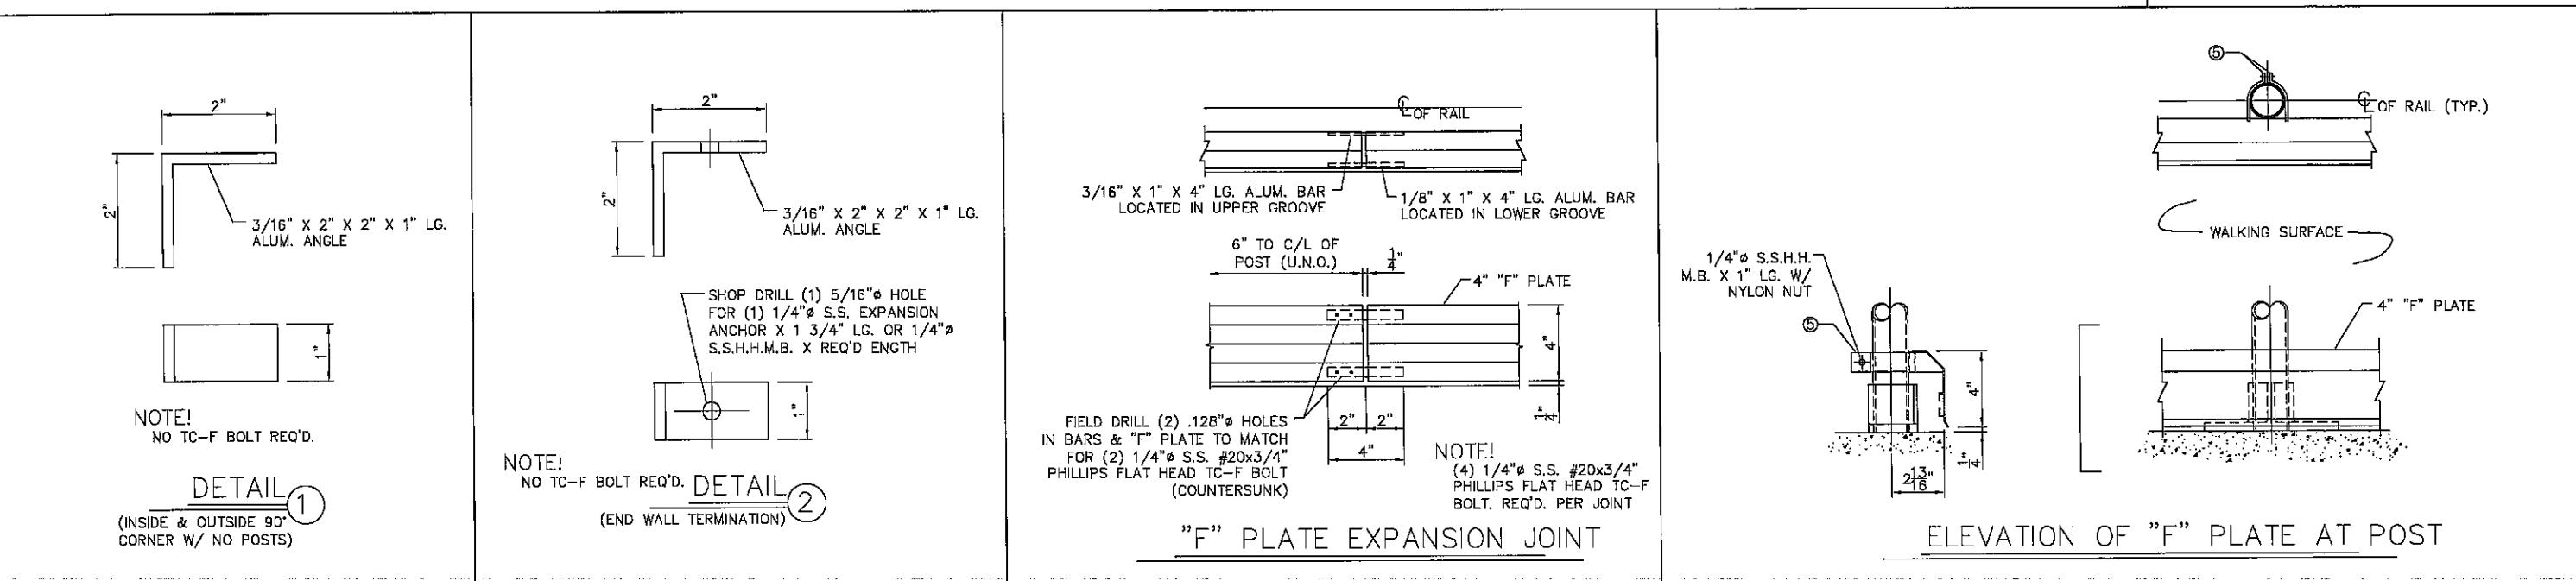


TOTAL POST 43
 BASE MT. 11
 EMBED N/A
 SIDE MT. 32

HEADWORKS BUILDING

SCALE: 3/8" = 1'-0"


SEE SHEET: HW-5

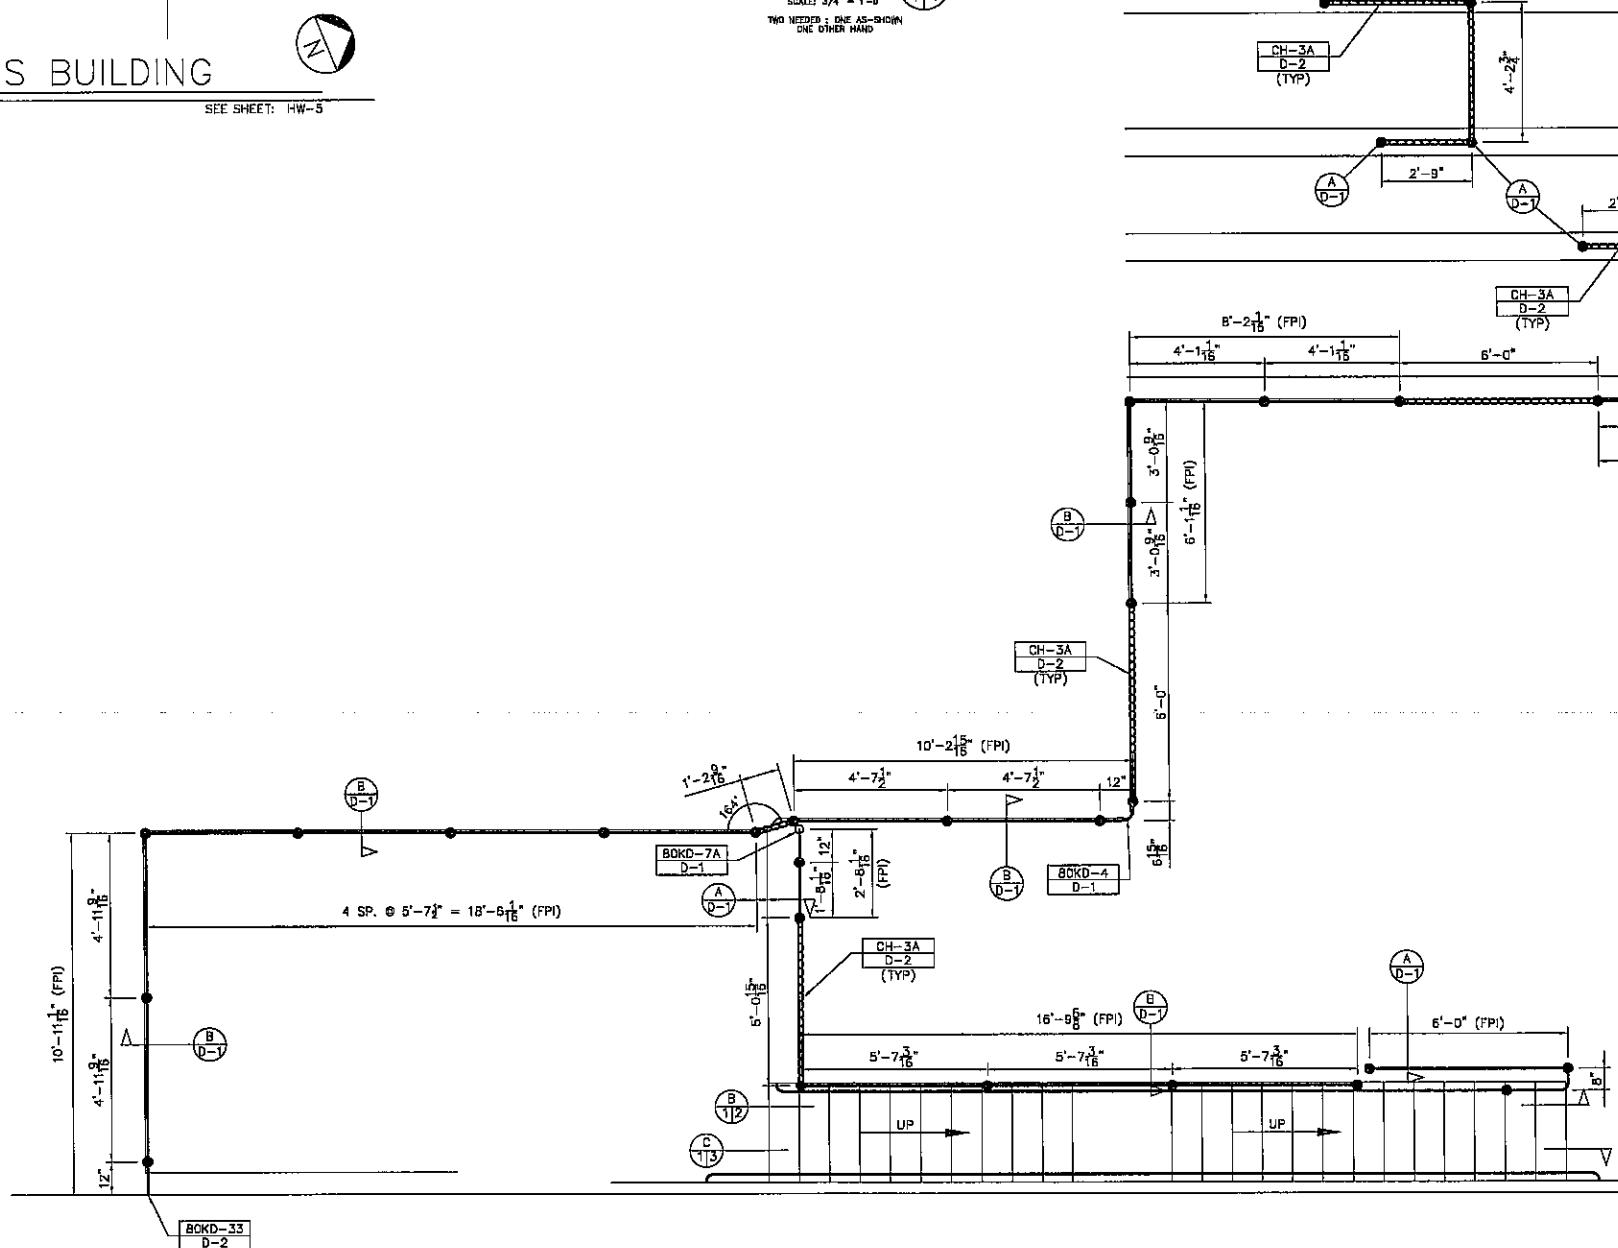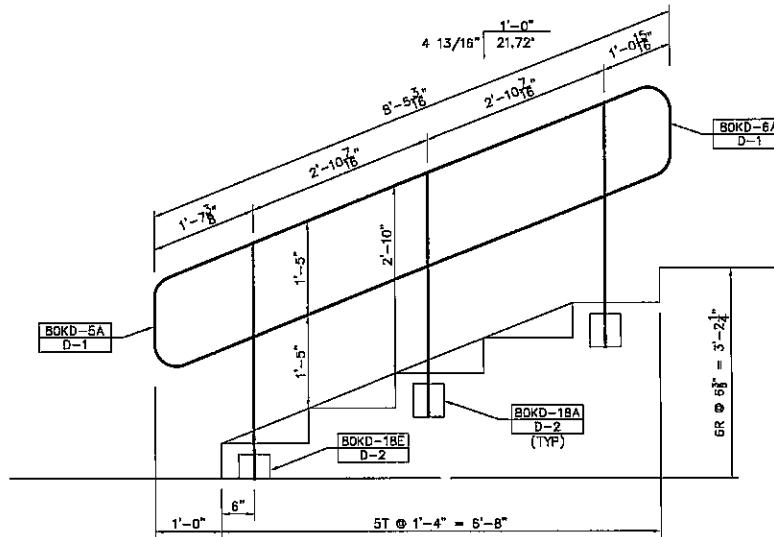

PLEASE VERIFY ALL CONCRETE STAIR DIMENSIONS
 PRIOR TO FABRICATION.


DATE		DRAW.	
BY		DESIGNER	
		GSM INC.	
		FOUNTAIN, CO.	
		DETAILS HEADWORKS BLDG.	
		FINISH: M10C22A41	
		DR. DDB DATE 7/26/11 SCALE AS ERCTION BY OTHERS APPROVAL NOTED	
		FIELD CHECKED BY OTHERS DATE 07-26-11	
		CUSTOMER P.O./JOB # 2908-054-70	
		L/F	

ROCKY MOUNTAIN RAILINGS
 11839 E 51st AVE DENVER, CO 80239 PHONE (303) 432-0003 FAX (303) 432-2038
 HAROLD D. THOMPSON W.R.F. DESIGNER GSM INC.
 FOUNTAIN, CO. CUSTOMER WEAVER CONSTRUCTION
 DETAILS HEADWORKS BLDG. CONTRACTOR
 FINISH: M10C22A41 DR. DDB DATE 7/26/11 SCALE AS
 ERCTION BY OTHERS APPROVAL NOTED
 FIELD CHECKED BY OTHERS DATE 07-26-11
 CUSTOMER P.O./JOB # 2908-054-70
 L/F
 DRAWING NO. R1940
 DRAWING NO. 1
 REFER TO CONTRACT DWG. DWG. NO.

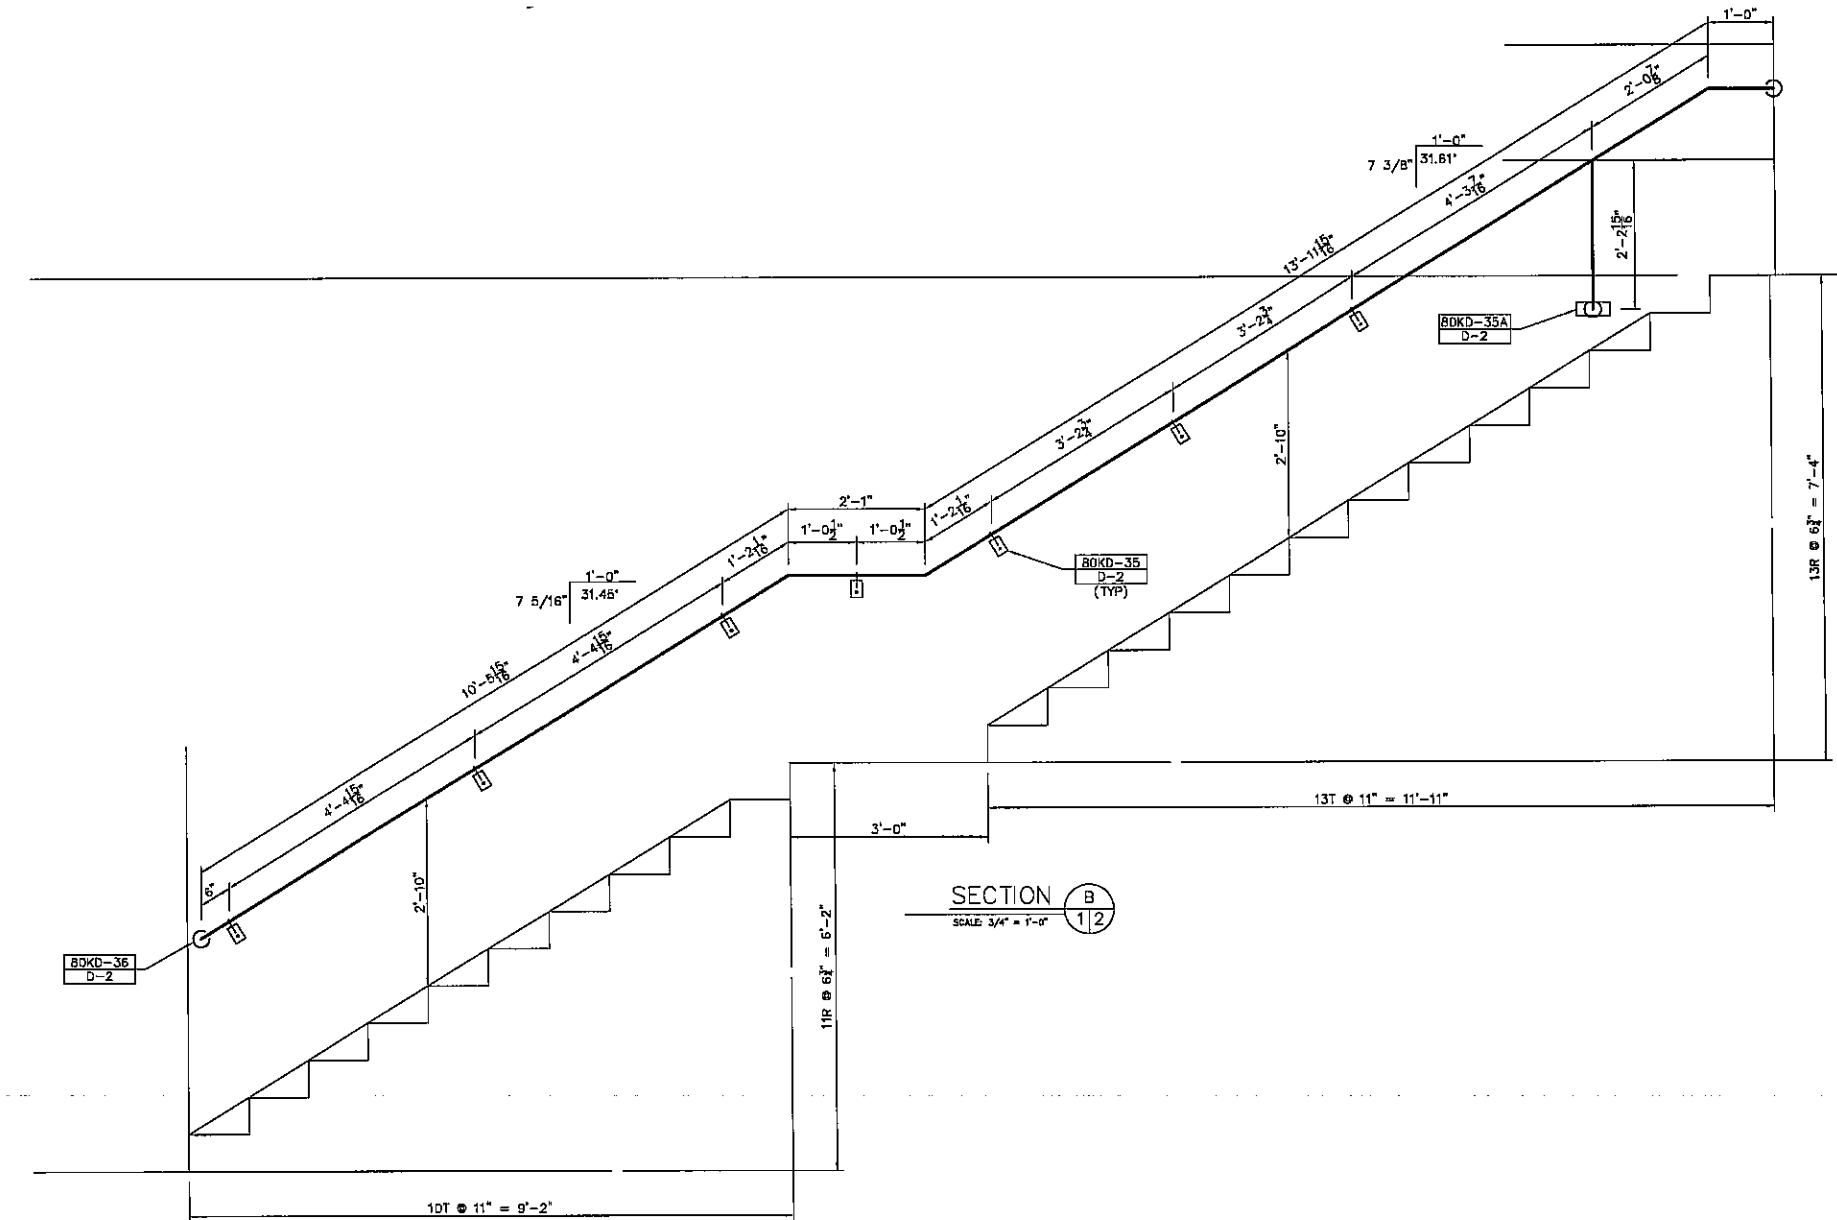

PLEASE VERIFY ALL CONCRETE STAIR DIMENSIONS
PRIOR TO FABRICATION.



ROCKY MOUNTAIN RAILINGS		11839 E 51st AVE DENVER, CO 80239	PHONE (303) 432-0003 FAX (303) 432-2038
BY	DATE	DESIGNER GSM INC.	
		FOUNTAIN, CO.	
DETAILS STAIR DETAILS		CUSTOMER WEAVER CONSTRUCTION	
FINISH M10C22A41		CONTRACTOR	
REVISION	DR. DDB DATE 7/26/11	SCALE AS	JOB NO. R1940
	ERCTION BY OTHERS	NOTED	PRINTS FOR APPROVAL DATE 07-26-11
	FIELD CHECKED BY OTHERS		DRAWING NO. 2
	CUSTOMER P.O./JOB 2908-05470		REFER TO CONTRACT DWG. Dwg. NO. 2
	L/P		

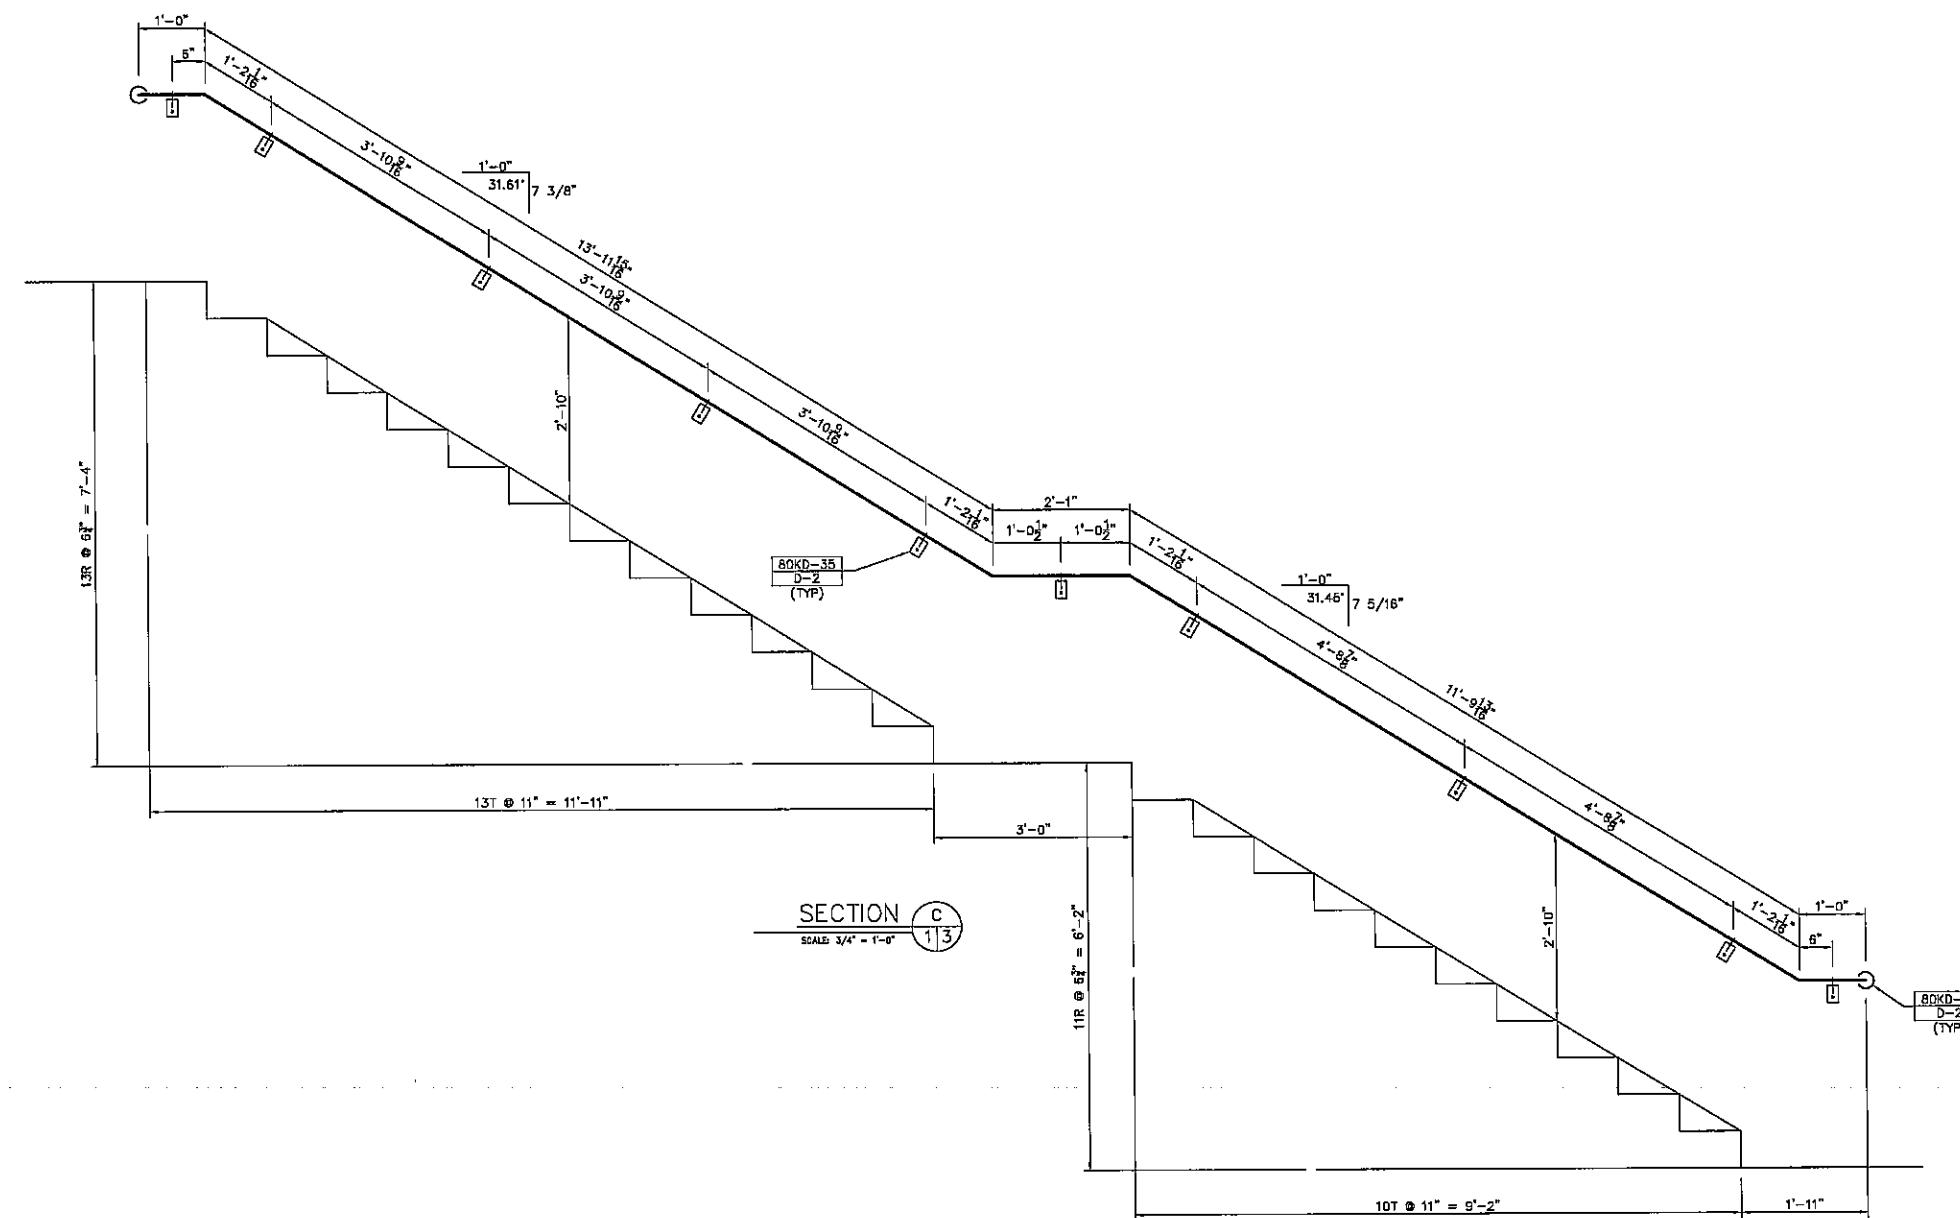

PLEASE VERIFY ALL CONCRETE STAIR DIMENSIONS
PRIOR TO FABRICATION.

ROCKY MOUNTAIN RAILINGS		11539 E 51st AVE DENVER, CO 80239	PHONE (303) 432-0003 FAX (303) 432-2038
		HAROLD D. THOMPSON W.R.F.	DESIGNER GSM INC.
		FOUNTAIN, CO.	CUSTOMER WEAVER CONSTRUCTION
DETAILS		STAIR SECTION	CONTRACTOR
		FINISH M10C22A41	
DR. DDB	DATE 7/26/11	SCALE AS NOTED	NO. PRINTS FOR 3
ERCTION BY OTHERS			DATE 07-26-11
FIELD CHECKED BY OTHERS			JOB NO. R1940
CUSTOMER P.O./JOB 2908-05470			DRAWING NO. 3
L/F			REFER TO CONTRACT DWG. Dwg. No.

TOTAL POST	11
BASE MT.	N/A
EMBED	N/A
SIDE MT.	11

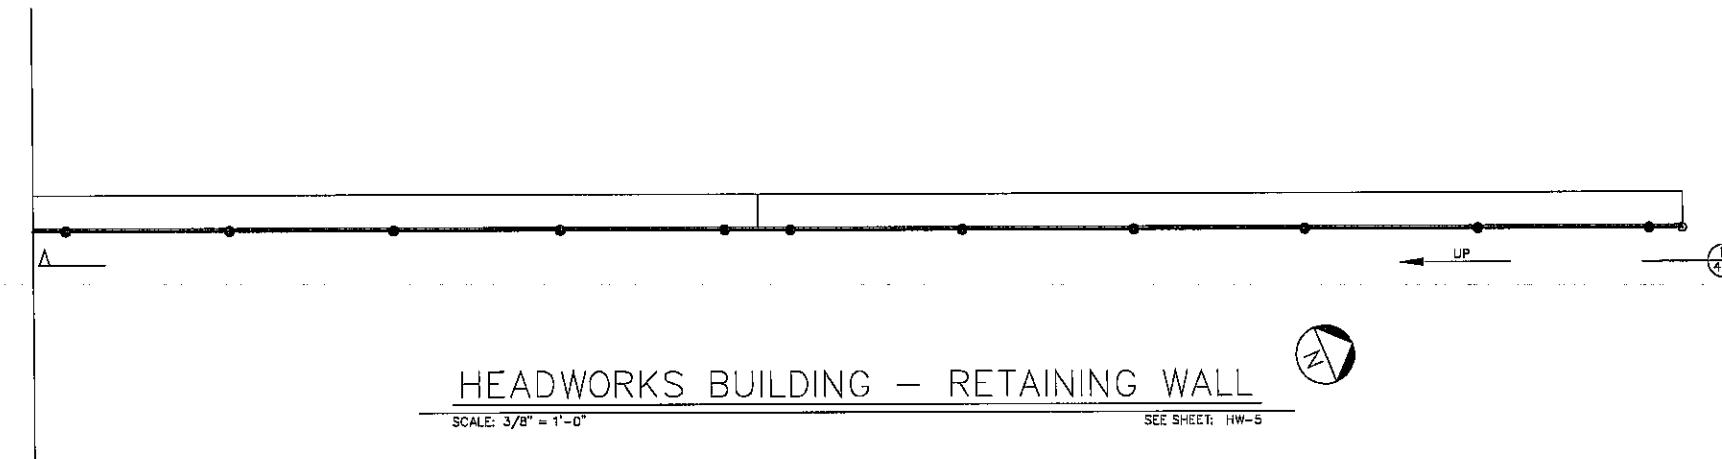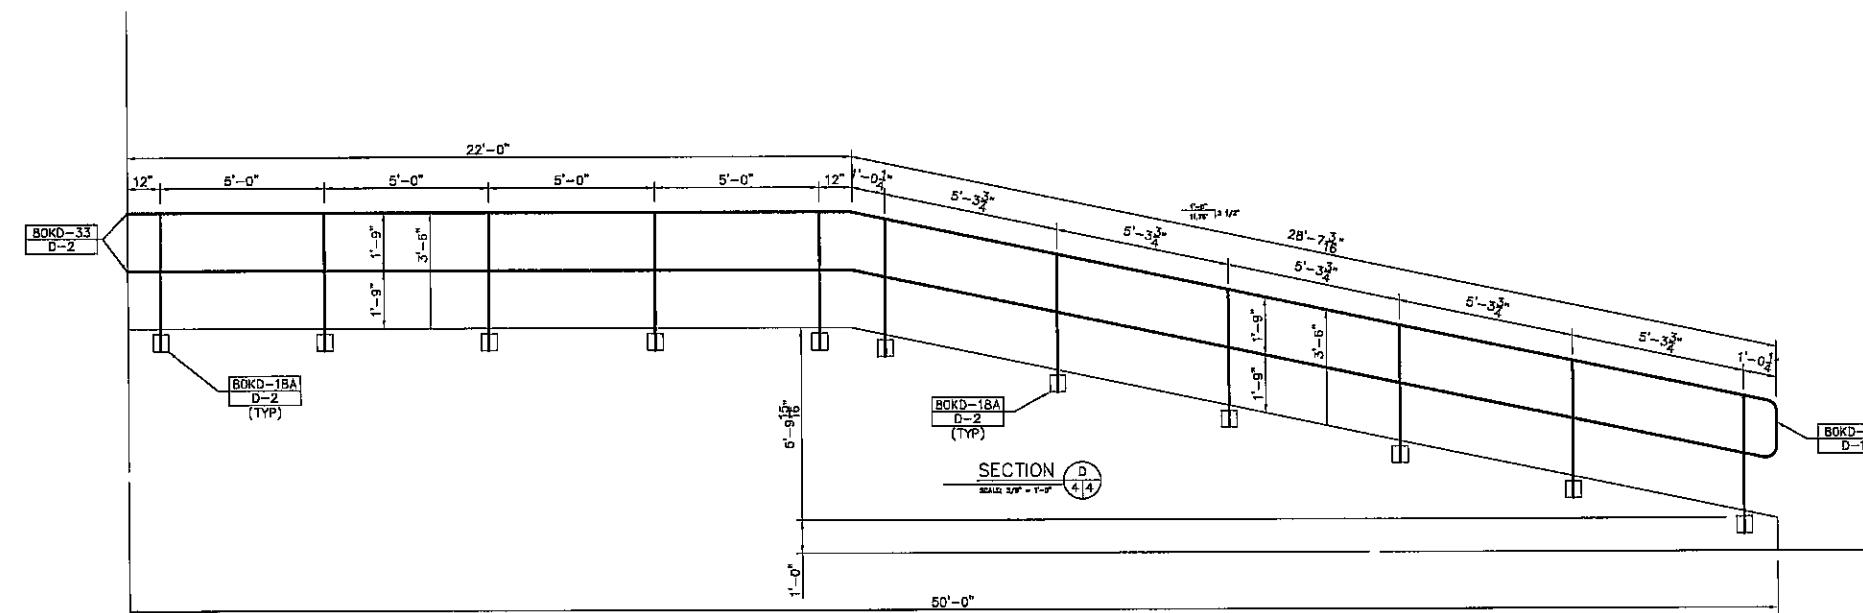

PLEASE VERIFY ALL CONCRETE STAIR DIMENSIONS
PRIOR TO FABRICATION.

		DATE	
	BY		
		REVISION	
ROCKY MOUNTAIN RAILINGS		DETAILS	
11639 E 51st AVE DENVER, CO 80238		RETAINING WALL DETAIL	
HAROLD D. THOMPSON W.R.F.		FINISH	
FOUNTAIN, CO.		M10C22A41	
DETAILS		DR. DDB DATE 7/26/11	SCALE AS
REVISION		ERCTION BY OTHERS	NOTED
		FIELD CHECKED BY OTHERS	
		CUSTOMER P.O./JOB 2908-05470	
		L/F	
			JOE NO. R1940
			DRAWING NO. 4
			REF ID: C123456789