



WEAVER CONSTRUCTION MANAGEMENT, INC.

3679 S. Huron St., Suite 404

Englewood, CO 80110

Phone: (303) 789-4111 FAX: (303) 789-4310

SUBMITTAL TRANSMITTAL

September 16, 2011

WGC Submittal No: 07900-001

PROJECT: Harold Thompson Regional WRF
Birdsall Rd.
Fountain, CO 80817
Job No. 2908

ENGINEER: GMS, Inc.
611 No. Weber St., #300
Colorado Springs, CO 80903
719-475-2935 Roger Sams

OWNER: Lower Fountain Metropolitan
Sewage Disposal District
901 S. Santa Fe Ave.
Fountain, CO 80817
719-382-5303 James Heckman

CONTRACTOR: Restoration Specialists, Inc.
6930 W 116th Ave., #50
Broomfield, CO 80038
303-460-8060 Donna Brumage

SUBJECT: Joint Sealants - Sikaflex 2c NS & SL Product Data, M.S.D.S and Color Chart

SPEC SECTION: 07900 - Joint Sealants

PREVIOUS SUBMISSION DATES: n/a

DEVIATIONS FROM SPEC: ___ YES X NO

CONTRACTOR'S STAMP: This submittal has been reviewed by Weaver General Construction and approved with respect to the means, methods, techniques, & safety precautions & programs incidental thereto. Weaver General Construction also warrants that this submittal complies with contracted documents and comprises on deviations thereto:

| | |
|---|---------------------------------|
| <p>Contractor's Stamp:</p> <p>Date: 9/16/11 Reviewed by: H.C. Myers (X) Reviewed Without Comments () Reviewed With Comments</p> <p>ENGINEER'S COMMENTS: _____</p> | <p>Engineer's Stamp:</p> |
|---|---------------------------------|

Submittal Letter

RESTORATION SPECIALISTS INC
PO BOX 29
BROOMFIELD, CO 80038

Tuesday, September 13, 2011
Submittal No. 1
Page 1 of 1

To:
WEAVER GENERAL CONSTRUCTION
3679 S HURON ST STE 404
ENGLEWOOD, CO 80110
Attn: Wes Weaver
wes@weavergc.com
Deliver via E-mail

Regarding:
11144 - Harold Thompson - WRF
Weaver General
3679 S. Huron St.
Englewood, CO 80110


Regarding:
Harold E. Thompson WRF - Jt. Sealants

We hereby submit the following for your approval. Please respond by: September 20, 2011

| Item No | Draw/Spec. No | Section No | Description |
|---------|---------------|------------|------------------------------|
| 1 | | | Sika 2c NS & SL Product Data |
| 2 | | | Sika 2c NS & SL MSDS |

Remarks:

I will send color charts to your main office attention to you.

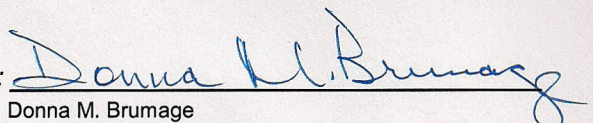Signed: 
Donna M. Brumage

Product Data Sheet
Edition 1.2007
Identification no. 464
Sikaflex-2c NS

Sikaflex[®]-2c NS

Two-component, non-sag, polyurethane elastomeric sealant

| | |
|---------------------|--|
| Description | Sikaflex-2c NS is a 2-component, premium-grade, polyurethane-based, elastomeric sealant. It is principally a chemical cure in a <u>non-sag</u> consistency. Meets ASTM C-920, Type M, Grade NS, Class 25, use T, NT, M, G, A, O, I and Federal Specification TT-S-00227E, Type II, Class A. Tested in accordance with ASTM C-1382 for use in EIFS systems. |
| Where to use | <ul style="list-style-type: none"> ■ Intended for use in all properly designed working joints with a minimum depth of 1/4 inch. ■ Ideal for vertical and horizontal applications. ■ Placeable at temperatures as low as 40°F. ■ Adheres to most substrates commonly found in construction. ■ An effective sealant for use in Exterior Insulation Finish Systems (EIFS). ■ Submerged environments, such as canal and reservoir joints. |
| Advantages | <ul style="list-style-type: none"> ■ Capable of ±50% joint movement. ■ Chemical cure allows the sealant to be placed in joints exceeding 1/2 in. in depth. ■ High elasticity with a tough, durable, flexible consistency. ■ Exceptional cut and tear resistance. ■ Exceptional adhesion to most substrates without priming. ■ Available in 40 architectural colors. ■ Color uniformity assured via Color-pak system. ■ Available in pre-pigmented Limestone Gray (no Color-pak needed). ■ Non-sag even in wide joints. ■ Easy to mix. ■ Paintable with water-, oil-, and rubber-base paints. ■ ANSI/NSF 61 approval for contact with potable water. ■ Jet fuel resistant. |
| Coverage | 1 gal. yields 231 cu. in. or 154 lin. ft. of a 1/2 in. x 1/4 in. joint. |
| Packaging | 1.5 gal. unit. 3 gal units. Color-pak is purchased separately. Limestone Gray color available pre-pigmented. |

Typical Data (Material and curing conditions 73°F (23°C) and 50% R.H.)

| | | |
|---|---|------------------------|
| Shelf life | One year in original, unopened containers. | |
| Storage Conditions | Store dry at 40°-95°F (4°-35°C). Condition material to 65°-75°F before using. | |
| Colors | A wide range of architectural colors are available. Special colors available on request. | |
| Application Temperature | 40° to 100°F, ambient and substrate temperatures. Sealant should be installed when joint is at mid-range of its anticipated movement. | |
| Service Range | -40° to 170°F (-40°-75°C). | |
| Curing Rate (ASTM C-679) | | |
| Tack-Free Time | 6-8 hrs. | |
| Final Cure | 3 days | |
| Application Life | 3-4 hrs. | |
| Tear Strength | ASTM D-624 | 45 lb./in. |
| Shore A Hardness | ASTM D-2240 | 25 ± 5 |
| Tensile Properties (ASTM D-412) | | |
| Tensile Strength at Break | 120 psi | |
| Tensile Elongation | 500% | |
| 100% Modulus | 70 psi | |
| Adhesion in Peel (Fed Spec. TT-S-00227E) | | |
| Substrate | Peel Strength | % Adhesion Loss |
| Concrete | 25 lb. | Zero |
| Weathering Resistance | Excellent | |
| Chemical Resistance | Good resistance to water, diluted acids, diluted alkalines, and residential sewage. Consult Technical Service for specific data. | |



How to Use

Surface Preparation

All joint-wall surfaces must be clean, sound, and frost-free. Joint walls must be free of oils, grease, curing compound residues, and any other foreign matter that might prevent bond. Ideally this should be accomplished by mechanical means. Bond breaker tape or backer rod must be used in bottom of joint to prevent bond.

Priming

Priming is typically not necessary. Most substrates only require priming if sealant will be subjected to water immersion after cure. Testing should be done, however, on questionable substrates, to determine if priming is needed.

Consult Technical Service or Sikaflex Primer Technical Data Sheet for additional information on priming.

Note: Most Exterior Insulation Finish Systems (EIFS) manufacturers recommend the use of a primer. When EIFS manufacturer specifies a primer or if on-site bond testing indicates a primer is necessary, Sikaflex 429 primer is recommended. On-site adhesion testing is recommended with final system prior to the start of a job.

Mixing

Pour entire contents of Component 'B' into pail of Component 'A'. Add entire contents of Color-pak into pail and mix with a low-speed drill (400-600 rpm) and Sikaflex paddle.* Mix for 3-5 minutes to achieve a uniform color and consistency. Scrape down sides of pail periodically. Avoid entrapment of air during mixing.

When mixing in cold weather (<50°F), do not force the mixing paddle to the bottom of the pail. After adding Component 'B' and Color-pak into Component 'A', mix the top 1/2 to 3/4 of the pail during the first minute of mixing. After scraping down the sides of the pail, mix again for another minute. The paddle should reach the bottom of the pail between the first and second minute of mixing. Scrape down the sides of the pail a second time and then mix for an additional 2-3 minutes until the sealant is well blended.

Color-pak must be used with tint base. For pre-pigmented Limestone base, just mix with low speed drill and Sikaflex paddle (no Color-pak needed).

Application

Recommended application temperatures 40°-100°F. Pre-conditioning units to approximately 70°F is necessary when working at extremes. Move pre-conditioned units to work areas just prior to application.

Apply sealant only to clean, sound, dry, and frost-free substrates. Sikaflex-2c should be applied into joints when joint slot is at mid-point of its designed expansion and contraction.

To place, load directly into bulk gun or use a follower plate loading system. Place nozzle of gun into bottom of joint and fill entire joint. Keeping the nozzle deep in the sealant, continue with a steady flow of sealant preceding nozzle to avoid air entrapment. Also, avoid overlapping of sealant since this also entraps air. Tool as necessary. Joint dimension should allow for 1/4 inch minimum and 1/2 inch maximum thickness for sealant. Proper design is 2:1 width to depth ratio.

Limitations

- The ultimate performance of Sikaflex-2c NS depends on good joint design and proper application.
- Minimum depth in working joint is 1/4 in.
- Maximum expansion and contraction should not exceed 50% of average joint width.
- Do not cure in the presence of curing silicones.
- Avoid contact with alcohol and other solvent cleaners during cure.
- Allow 3-day cure before subjecting sealant to total water immersion.
- Avoid exposure to high levels of chlorine. (Maximum level is 5 ppm).
- Do not apply when moisture vapor transmission exists since this can cause bubbling within the sealant.
- Avoid over-mixing sealant.
- Light color shades tend to yellow over time when exposed to ultraviolet rays.
- Light colors can yellow slightly if exposed to direct gas fired heating elements prior to the formation of initial skin.
- When overcoating: an on-site test is recommended to determine actual compatibility.
- The depth of sealant in horizontal joints subject to traffic is 1/2 inch.
- In horizontal joints exposed to vehicular or foot traffic, "TG" additive is recommended. See Sikaflex-2c NS TG data sheet for specific details.

Caution

Component 'A': Irritant - Avoid contact. Product is a skin, respiratory and eye irritant. Use of safety goggles and chemical resistant gloves recommended. Use of a NIOSH approved respirator required if PELs are exceeded. Use with adequate ventilation.

Component 'B': Combustible; Sensitizer; Irritant - Contains Xylene. Keep away from heat, sparks and open flame. Use with adequate ventilation. Product is a respiratory and skin sensitizer. Avoid contact. Product is an eye, skin, and respiratory irritant. Use of safety goggles and chemical resistant gloves recommended. Use of a NIOSH approved respirator required if PELs are exceeded.

First Aid

Eyes – Rinse eyes thoroughly for fifteen minutes. Contact physician. **Skin** – Wash affected area thoroughly with soap and water. Remove contaminated clothing. If irritation persists contact physician. **Inhalation** – Remove to fresh air. If breathing stops, institute artificial respiration. Contact physician. **Ingestion** – Dilute with water. Contact physician.

Clean Up

Uncured material can be removed with approved solvent. Cured material can only be removed mechanically. For spillage, collect, absorb, and dispose of in accordance with current, applicable local, state, and federal regulations.

KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

KEEP OUT OF REACH OF CHILDREN
FOR INDUSTRIAL USE ONLY

Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Technical Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

Visit our website at www.sikaconstruction.com

1-800-933-SIKA NATIONWIDE

Regional Information and Sales Centers. For the location of your nearest Sika sales office, contact your regional center.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 800-933-7452
Fax: 201-933-6225

Sika Canada Inc.
601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537



Quality Certification Numbers: Lyndhurst: FM 69711 (ISO 9000), FM 70421 (QS 9000), Marion: FM 69715, Kansas City: FM 69107, Santa Fe Springs: FM 69408

Sika and Sikaflex are registered trademarks. Made in USA. Printed in USA.



Product Data Sheet
Edition 1.2007
Identification no. 465
Sikaflex-2c SL

Sikaflex[®]-2c SL

Two-component, self-leveling, polyurethane elastomeric sealant

| | |
|---------------------|---|
| Description | Sikaflex-2c SL is a 2-component, premium-grade, polyurethane-based, elastomeric sealant. It is principally a chemical cure in a <u>self-leveling</u> consistency. Meets ASTM C-920, Type M, Grade P, Class 25, use T, NT, M, G, A, O, I and Federal Specification TT-S-00227E, Type 1, Class A. |
| Where to use | <ul style="list-style-type: none"> ■ Intended for use in all properly designed working joints with a minimum depth of 1/4 inch. ■ Ideal for horizontal applications. ■ Placeable at temperatures as low as 40°F. ■ Adheres to most substrates commonly found in construction. ■ Submerged conditions, such as canal and reservoir joints. |
| Advantages | <ul style="list-style-type: none"> ■ True self-leveling properties. ■ Capable of ±50% joint movement. ■ Chemical cure allows the sealant to be placed in joints exceeding 1/2 in. in depth. ■ High elasticity with a tough, durable, flexible consistency. ■ Exceptional cut and tear resistance. ■ Exceptional adhesion to most substrates without priming. ■ Available in 40 architectural colors. ■ Color uniformity assured via Color-pak system. ■ Available in pre-pigmented Limestone Gray (no Color-pak needed). ■ Self-leveling consistency, easy to apply in horizontal joints. ■ Easy to mix. ■ Paintable with water-, oil-, and rubber-base paints. ■ Jet fuel resistant. ■ USDA approved. ■ No color-pak needed in pre-pigmented Limestone. |
| Coverage | 1 gal. yields 231 cu. in. or 154 lin. ft. of a 1/2 in. X 1/4 in. joint. |
| Packaging | 1.5 gal. unit. 3 gal. units. Color-pak is purchased separately. Limestone Gray color available pre-pigmented. |

Typical Data (Material and curing conditions 73°F (23°C) and 50% R.H.)

| | | |
|---|---|---|
| Shelf life | One year in original, unopened containers. | |
| Storage Conditions | Store dry at 40°-95°F (4°-35°C). Condition material to 65°-75°F before using. | |
| Colors | A wide range of architectural colors are available. Special colors available on request. | |
| Application Temperature | 40° to 100°F, ambient and substrate temperatures. Sealant should be installed when joint is at mid-range of its anticipated movement. | |
| Service Range | -40° to 170°F (-40°-75°C). | |
| Curing Rate (ASTM C-679) | | |
| | Tack-free Time | 6-8 hrs. |
| | Final Cure | 3 days |
| Application Life | TT-S-00227E | 4 hrs. |
| Tear Strength | ASTM D-624 | 100 lb./in. |
| Shore A Hardness | ASTM D-2240 | 40 ± 5 |
| Tensile Properties (ASTM D412) | | |
| | Tensile Strength at Break | 175 psi |
| | Tensile Elongation | 650% |
| | 100% Modulus | 100 psi |
| Adhesion in Peel (Fed Spec. TT-S-00227E) | | |
| | Substrate | Peel Strength % Adhesion Loss |
| | Concrete | 30 lb. Zero |
| Weathering Resistance | Excellent | |
| Chemical Resistance | Good resistance to water, diluted acids, diluted alkalines, and residential sewage. Consult Technical Service for specific data. | |



How to Use

Surface Preparation

All joint-wall surfaces must be clean, sound, and frost-free. Joint walls must be free of oils, grease, curing compound residues, and any other foreign matter that might prevent bond. Ideally this should be accomplished by mechanical means.
Bond breaker tape or backer rod must be used in bottom of joint to prevent bond.

Priming

Priming is typically not necessary. Most substrates only require priming if sealant will be subjected to water immersion after cure. Testing should be done, however, on questionable substrates, to determine if priming is needed.
Consult Technical Service or Sikaflex Primer Technical Data Sheet for additional information on priming.

Mixing

Pour entire contents of Component 'B' into pail of Component 'A'. Add entire contents of Color-pak into pail and mix with a low-speed drill (400-600 rpm) and Sikaflex paddle. * Mix for 3-5 minutes to achieve a uniform color and consistency. Scrape down sides of pail periodically. Avoid entrapment of air during mixing. Color-pak must be used with tint base.

Note: When mixing 3 gal. unit, two containers of Component B and two color-paks must be used.
*For pre-pigmented Limestone base, just mix with low speed drill and Sikaflex paddle (no Color-pak needed).

Application

Recommended application temperatures 40°-100°F. Pre-conditioning units to approximately 70°F is necessary when working at extremes. Move pre-conditioned units to work areas just prior to application. Apply sealant only to clean, sound, dry, and frost-free substrates. Sikaflex-2c should be applied into joints when joint slot is at mid-point of its designed expansion and contraction.
To place, pour or extrude the SL grade in one direction and allow it to flow and level as necessary. If extruding, load mixed sealant directly into bulk gun or use follower plate loading system. Place nozzle of gun into bottom of joint and fill entire joint. Keeping the nozzle deep in the sealant, continue with a steady flow of sealant preceding nozzle to avoid air entrapment. Also, avoid overlapping of sealant since this also entraps air. Tool as necessary. Joint dimension should allow for 1/4 inch minimum and 1/2 inch maximum thickness for sealant. Proper design is 2:1 width to depth ratio.

Limitations

- The ultimate performance of Sikaflex-2c, depends on good joint design and proper application.
- Minimum depth in working joint is 1/4 in.
- Maximum expansion and contraction should not exceed 50% of average joint width.
- Do not cure in the presence of curing silicones.
- Avoid contact with alcohol and other solvent cleaners during cure.
- Allow 3 day cure before subjecting sealant to total water immersion.
- Avoid exposure to high levels of chlorine. (Maximum level is 5 ppm).
- Do not apply when moisture vapor transmission exists since this can cause bubbling within the sealant.
- Avoid over-mixing sealant.
- Light color shades tend to yellow over time when exposed to ultraviolet rays.
- When overcoating: an on-site test is recommended to determine actual compatibility.
- The minimum depth of sealant in horizontal joints subject to traffic is 1/2 inch.
- Do not tool with detergent or soap solution.

Caution

Component 'A'; Irritant - Avoid contact. Product is a skin, respiratory and eye irritant. Use of safety goggles and chemical resistant gloves recommended. Use of a NIOSH approved respirator required if PELs are exceeded. Use with adequate ventilation.
Component 'B'; Combustible; Sensitizer; Irritant - Contains Xylene. Keep away from heat, sparks and open flame. Use with adequate ventilation. Product is a respiratory and skin sensitizer. Avoid contact. Product is an eye, skin, and respiratory irritant. Use of safety goggles and chemical resistant gloves recommended. Use of a NIOSH approved respirator required if PELs are exceeded.

First Aid

In case of skin contact, wash thoroughly with soap and water. For eye contact, flush immediately with plenty of water for at least 15 minutes; contact physician. For respiratory problems, remove to fresh air. Wash clothing before re-use. Discard contaminated shoes.

Clean Up

Uncured material can be removed with approved solvent. Cured material can only be removed mechanically. For spillage, collect, absorb, and dispose of in accordance with current, applicable local, state, and federal regulations.

Linear Feet of Sealant per Gallon

| Inches | Depth | | | | | |
|--------|-------|------|------|------|-------|-------|
| | 1/4 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 |
| 1/4 | 308.0 | | | | | |
| 1/2 | 154.0 | 77.0 | | | | |
| 3/4 | 102.7 | 51.3 | 34.2 | | | |
| 1 | 77.0 | 38.5 | 25.7 | 19.3 | | |
| 1 1/4 | 61.6 | 30.8 | 20.5 | 15.4 | 12.3 | |
| 1 1/2 | 51.3 | 25.7 | 17.1 | 12.8 | 10.3 | 8.6 |

KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION

KEEP OUT OF REACH OF CHILDREN
FOR INDUSTRIAL USE ONLY

CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Technical Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

Visit our website at www.sikaconstruction.com

1-800-933-SIKA NATIONWIDE

Regional Information and Sales Centers. For the location of your nearest Sika sales office, contact your regional center.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 800-933-7452
Fax: 201-933-6225

Sika Canada Inc.
601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537

QUALITY
ISO 9001
9002
ACHIEVEMENT





MATERIAL SAFETY DATA SHEET

Sikaflex® 2C NS - Part A (Limestone and Tint Base)

HMIS

| | |
|---------------------|----|
| HEALTH | *2 |
| FLAMMABILITY | 1 |
| REACTIVITY | 0 |
| PERSONAL PROTECTION | C |

1. Product And Company Identification

| | |
|--|--|
| Supplier Sika Corporation 201 Polito Ave Lyndhurst, NJ 07071 Company Contact: EHS Department Telephone Number: 201-933-8800 FAX Number: 201-933-9379 Web Site: www.sikausa.com | Manufacturer Sika Corporation 201 Polito Ave Lyndhurst, NJ 07071 Company Contact: EHS Department Telephone Number: 201-933-8800 FAX Number: 201-933-9379 Web Site: www.sikausa.com |
| Supplier Emergency Contacts & Phone Number CHEMTREC: 800-424-9300 INTERNATIONAL: 703-527-3887 | Manufacturer Emergency Contacts & Phone Number CHEMTREC: 800-424-9300 INTERNATIONAL: 703-527-3887 |

Issue Date: 08/11/2006

Product Name: Sikaflex® 2C NS - Part A (Limestone and Tint Base)
CAS Number: Not Established
Chemical Family: Polyurethane
MSDS Number: 3965
Product Code: 0464130

2. Composition/Information On Ingredients

| Ingredient Name | CAS Number | Percent Of Total Weight |
|---------------------------|------------|-------------------------|
| POLYISOCYANATE PREPOLYMER | Mixture | |
| XYLENE (MIXED ISOMERS) | 1330-20-7 | 1 - 5 |

3. Hazards Identification

Eye Hazards

Causes eye irritation.

Skin Hazards

May cause skin irritation. Prolonged and/or repeated skin contact may cause an allergic reaction/sensitization.

Ingestion Hazards

May be harmful if swallowed.

Inhalation Hazards

May cause respiratory tract irritation. May cause an allergic respiratory reaction / sensitization after prolonged or repeated contact. Reports have associated repeated and prolonged exposure to some of the chemicals in this

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C NS - Part A (Limestone and Tint Base)

3. Hazards Identification - Continued

Inhalation Hazards - Continued

product with permanent brain, liver, kidney, and Central Nervous System damage. Headaches and dizziness may result.

4. First Aid Measures

Eye

In case of contact, hold eyelids apart and immediately flush eyes with plenty of tepid water for at least 15 minutes. Get medical attention immediately if irritation develops and persists.

Skin

In case of contact, immediately flush skin with soap and plenty of tepid water for at least 15 minutes. Get medical attention immediately if irritation (redness, rash, blistering) develops and persists.

Ingestion

If swallowed, do not induce vomiting unless directed to do so by medical personnel. If victim is fully conscious, give one or two cups of water or milk to drink. Never give anything by mouth to an unconscious victim. Seek medical attention immediately.

Inhalation

Remove to fresh air. If not breathing, give artificial respiration, seek medical attention.

5. Fire Fighting Measures

Flash Point: > 230 °F > 110 °C

Autoignition Point: N/AV °F

Fire And Explosion Hazards

During a fire, irritating and/or toxic gases and aerosols from the decomposition/combustion products may be present.

Extinguishing Media

In case of fire, use water spray (fog) foam, dry chemical, or CO₂.

Fire Fighting Instructions

In the event of a fire, firefighters should wear full protective clothing and NIOSH-approved self-contained breathing apparatus with a full facepiece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

Avoid release to the environment. Use appropriate Personal Protective Equipment (PPE). Contain spill and collect with absorbent material and transfer into suitable containers. Do not flush to sewer or allow to enter waterways. Ventilate enclosed area.

7. Handling And Storage

Handling And Storage Precautions

Keep out of reach of children. Not for internal consumption.

Storage Precautions

Store at 32F min. - 122F max. Ideal storage temperature 50 - 80F. If closed container is exposed to heat, pressure can build up. If moisture enters container, pressure may build up due to reaction. Store in cool, dry area in tightly closed containers, away from sparks and open flames.

Work/Hygienic Practices

Wash thoroughly with soap and water after handling.

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C NS - Part A (Limestone and Tint Base)

8. Exposure Controls/Personal Protection

Engineering Controls

Use of a system of local and/or general exhaust is recommended to keep employee below applicable exposure limits. Refer to the current edition of "Industrial Ventilation: A Manual of Recommended Practice" published by the American Conference of Governmental Industrial Hygienists for information on the design, installation, use, and maintenance of exhaust systems.

Eye/Face Protection

Safety glasses with side shields or goggles.

Skin Protection

Chemical-resistant gloves. Lab coat or other work clothing to prevent skin exposure (Long sleeve shirt and long pants). Launder before reuse.

Respiratory Protection

A respirator protection program that meets 29 CFR 1910.134 requirement must be followed whenever workplace conditions warrant a respirator's use. In areas where the Permissible Exposure Limits are exceeded, use a properly fitted NIOSH-approved respirator.

Other/General Protection

Wash thoroughly after handling.

Ingredient(s) - Exposure Limits

XYLENE (MIXED ISOMERS)
ACGIH TLV-STEL 150 ppm
ACGIH TLV-TWA 100 ppm
OSHA PEL-TWA 100 ppm

9. Physical And Chemical Properties

Appearance

Mastic

Odor

Aromatic Odor

Chemical Type: Mixture

Physical State: Solid

Melting Point: N/AV °F

Boiling Point: N/AV °F

Specific Gravity: 1.55

Percent VOCs: < 4

Packing Density: 12.95 lbs/gallon

Vapor Pressure: N/AV

Vapor Density: > Air

Solubility: N/AV

Evaporation Rate: Slower than ether

VOC content: Part A: 19 g/l

Part B: 92 g/l

Part A+B: 38.1 g/l

10. Stability And Reactivity

Stability: Stable

Hazardous Polymerization: Will not occur

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C NS - Part A (Limestone and Tint Base)

10. Stability And Reactivity - Continued

Conditions To Avoid (Stability)

Open flame, heat

Incompatible Materials

Contact with water, alcohols and amines.

Hazardous Decomposition Products

CO, CO₂, Oxides of Nitrogen

11. Toxicological Information

No Data Available...

12. Ecological Information

No Data Available...

13. Disposal Considerations

Dispose in accordance with applicable federal, state and local government regulations. Waste generators must determine whether a discarded material is classified as a hazardous waste. USEPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

14. Transport Information

Proper Shipping Name

Not regulated by the USDOT.

15. Regulatory Information

U.S. Regulatory Information

All ingredients of this product are listed or are excluded from listing under the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory.

SARA Hazard Classes

Acute Health Hazard

SARA Title III - Section 313 Supplier Notification

This product contains the following toxic chemicals that are subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372.

XYLENE (MIXED ISOMERS) (1330-20-7) 1 - 5 %

This information must be included on all MSDSs that are copied and distributed for this material.

Ingredient(s) - U.S. Regulatory Information

XYLENE (MIXED ISOMERS)

SARA Title III - Section 313 Form "R"/TRI Reportable Chemical

SARA - Acute Health Hazard

SARA - Chronic Health Hazard

SARA - Fire Hazard

Ingredient(s) - State Regulations

XYLENE (MIXED ISOMERS)

New Jersey - Workplace Hazard

New Jersey - Environmental Hazard

New Jersey - Special Hazard

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C NS - Part A (Limestone and Tint Base)

15. Regulatory Information - Continued

Ingredient(s) - State Regulations - Continued

Pennsylvania - Workplace Hazard
Pennsylvania - Environmental Hazard
Massachusetts - Hazardous Substance
New York City - Hazardous Substance

16. Other Information

HMIS Rating

Health: *2

Fire: 1

Reactivity: 0

PPE: C

Revision/Preparer Information

MSDS Preparer: EHS Department

MSDS Preparer Phone Number: 201-933-8800

This MSDS Supercedes A Previous MSDS Dated: 07/21/2006

Disclaimer

The information contained in this Material Safety Data Sheet applies only to the actual Sika Corporation ("Sika") product identified and described herein. This information is not intended to address, nor does it address the use or application of the identified Sika product in combination with any other material, product or process. All of the information set forth herein is based on technical data regarding the identified product that Sika believes to be reliable as of the date hereof. Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's current Technical Data Sheet, product label and Material Safety Data Sheet for each Sika product, which are available at web site and/or telephone number listed in Section 1 of this MSDS.

SIKA MAKES NO WARRANTIES EXPRESS OR IMPLIED AND ASSUMES NO LIABILITY ARISING FROM THIS INFORMATION OR ITS USE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES AND SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

All sales of Sika products are subject to its current terms and conditions of sale available at www.sikacorp.com or 201-933-8800.

SIKA CORPORATION

Printed Using MSDS Generator™ 2000



MATERIAL SAFETY DATA SHEET

Sikaflex® 2C SL - Part A (Limestone and Tint Base)

HMIS

| | |
|---------------------|----|
| HEALTH | *2 |
| FLAMMABILITY | 1 |
| REACTIVITY | 0 |
| PERSONAL PROTECTION | C |

1. Product And Company Identification

Supplier

Sika Corporation
201 Polito Ave
Lyndhurst, NJ 07071

Company Contact: EHS Department
Telephone Number: 201-933-8800
FAX Number: 201-933-9379
Web Site: www.sikausa.com

Manufacturer

Sika Corporation
201 Polito Ave
Lyndhurst, NJ 07071

Company Contact: EHS Department
Telephone Number: 201-933-8800
FAX Number: 201-933-9379
Web Site: www.sikausa.com

Supplier Emergency Contacts & Phone Number

CHEMTREC: 800-424-9300
INTERNATIONAL: 703-527-3887

Manufacturer Emergency Contacts & Phone Number

CHEMTREC: 800-424-9300
INTERNATIONAL: 703-527-3887

Issue Date: 07/21/2006

Product Name: Sikaflex® 2C SL - Part A (Limestone and Tint Base)

CAS Number: Not Established

Chemical Family: Polyurethane

MSDS Number: 3952

Product Code: 0465137 / 0465130

2. Composition/Information On Ingredients

| Ingredient Name | CAS Number | Percent Of Total Weight |
|---------------------------|------------|-------------------------|
| POLYISOCYANATE PREPOLYMER | Mixture | |
| XYLENE (MIXED ISOMERS) | 1330-20-7 | 1 - 5 |

3. Hazards Identification

Eye Hazards

Causes eye irritation.

Skin Hazards

May cause skin irritation. Prolonged and/or repeated skin contact may cause an allergic reaction/sensitization.

Ingestion Hazards

May be harmful if swallowed.

Inhalation Hazards

May cause respiratory tract irritation. May cause an allergic respiratory reaction / sensitization after prolonged or repeated contact. Reports have associated repeated and prolonged exposure to some of the chemicals in this

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C SL - Part A (Limestone and Tint Base)

3. Hazards Identification - Continued

Inhalation Hazards - Continued

product with permanent brain, liver, kidney, and Central Nervous System damage. Headaches and dizziness may result.

4. First Aid Measures

Eye

In case of contact, hold eyelids apart and immediately flush eyes with plenty of tepid water for at least 15 minutes. Get medical attention immediately if irritation develops and persists.

Skin

In case of contact, immediately flush skin with soap and plenty of tepid water for at least 15 minutes. Get medical attention immediately if irritation (redness, rash, blistering) develops and persists.

Ingestion

If swallowed, do not induce vomiting unless directed to do so by medical personnel. If victim is fully conscious, give one or two cups of water or milk to drink. Never give anything by mouth to an unconscious victim. Seek medical attention immediately.

Inhalation

Remove to fresh air. If not breathing, give artificial respiration, seek medical attention.

5. Fire Fighting Measures

Flash Point: > 215 °F > 102 °C

Autoignition Point: N/AV °F

Fire And Explosion Hazards

During a fire, irritating and/or toxic gases and aerosols from the decomposition/combustion products may be present.

Extinguishing Media

In case of fire, use water spray (fog) foam, dry chemical, or CO₂.

Fire Fighting Instructions

In the event of a fire, firefighters should wear full protective clothing and NIOSH-approved self-contained breathing apparatus with a full facepiece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

Avoid release to the environment. Use appropriate Personal Protective Equipment (PPE). Contain spill and collect with absorbent material and transfer into suitable containers. Do not flush to sewer or allow to enter waterways. Ventilate enclosed area.

7. Handling And Storage

Handling And Storage Precautions

Keep out of reach of children. Not for internal consumption.

Storage Precautions

Store at 32F min. - 122F max. Ideal storage temperature 50 - 80F. If closed container is exposed to heat, pressure can build up. If moisture enters container, pressure may build up due to reaction. Store in cool, dry area in tightly closed containers, away from sparks and open flames.

Work/Hygienic Practices

Wash thoroughly with soap and water after handling.

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C SL - Part A (Limestone and Tint Base)

8. Exposure Controls/Personal Protection

Engineering Controls

Use of a system of local and/or general exhaust is recommended to keep employee below applicable exposure limits. Refer to the current edition of "Industrial Ventilation: A Manual of Recommended Practice" published by the American Conference of Governmental Industrial Hygienists for information on the design, installation, use, and maintenance of exhaust systems.

Eye/Face Protection

Safety glasses with side shields or goggles.

Skin Protection

Chemical-resistant gloves. Lab coat or other work clothing to prevent skin exposure (Long sleeve shirt and long pants). Launder before reuse.

Respiratory Protection

A respirator protection program that meets 29 CFR 1910.134 requirement must be followed whenever workplace conditions warrant a respirator's use. In areas where the Permissible Exposure Limits are exceeded, use a properly fitted NIOSH-approved respirator.

Other/General Protection

Wash thoroughly after handling.

Ingredient(s) - Exposure Limits

XYLENE (MIXED ISOMERS)
ACGIH TLV-STEL 150 ppm
ACGIH TLV-TWA 100 ppm
OSHA PEL-TWA 100 ppm

9. Physical And Chemical Properties

Appearance

Mastic

Odor

Aromatic Odor

Chemical Type: Mixture

Physical State: Solid

Melting Point: N/AV °F

Boiling Point: N/AV °F

Specific Gravity: 1.6

Packing Density: 13.2 lbs/gallon

Vapor Pressure: N/AV

Vapor Density: > Air

Solubility: N/AV

Evaporation Rate: Slower than ether

VOC content: Part A: 69 g/l

Part B: 92 g/l

Part A+B: 75 g/l

10. Stability And Reactivity

Stability: Stable

Hazardous Polymerization: Will not occur

Conditions To Avoid (Stability)

Open flame, heat

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C SL - Part A (Limestone and Tint Base)

10. Stability And Reactivity - Continued

Incompatible Materials

Contact with water, alcohols and amines.

Hazardous Decomposition Products

CO, CO₂, Oxides of Nitrogen

11. Toxicological Information

No Data Available...

12. Ecological Information

No Data Available...

13. Disposal Considerations

Dispose in accordance with applicable federal, state and local government regulations. Waste generators must determine whether a discarded material is classified as a hazardous waste. USEPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

14. Transport Information

Proper Shipping Name

Not regulated by the USDOT.

15. Regulatory Information

U.S. Regulatory Information

All ingredients of this product are listed or are excluded from listing under the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory.

SARA Hazard Classes

Acute Health Hazard

SARA Title III - Section 313 Supplier Notification

This product contains the following toxic chemicals that are subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372.

XYLENE (MIXED ISOMERS) (1330-20-7) 1 - 5 %

This information must be included on all MSDSs that are copied and distributed for this material.

Ingredient(s) - U.S. Regulatory Information

XYLENE (MIXED ISOMERS)

SARA Title III - Section 313 Form "R"/TRI Reportable Chemical

SARA - Acute Health Hazard

SARA - Chronic Health Hazard

SARA - Fire Hazard

Ingredient(s) - State Regulations

XYLENE (MIXED ISOMERS)

New Jersey - Workplace Hazard

New Jersey - Environmental Hazard

New Jersey - Special Hazard

Pennsylvania - Workplace Hazard

Pennsylvania - Environmental Hazard

Massachusetts - Hazardous Substance

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C SL - Part A (Limestone and Tint Base)

15. Regulatory Information - Continued

Ingredient(s) - State Regulations - Continued

New York City - Hazardous Substance

16. Other Information

HMIS Rating

Health: *2

Fire: 1

Reactivity: 0

PPE: C

Revision/Preparer Information

MSDS Preparer: EHS Department

MSDS Preparer Phone Number: 201-933-8800

This MSDS Supercedes A Previous MSDS Dated: 11/02/2005

Disclaimer

The information contained in this Material Safety Data Sheet applies only to the actual Sika Corporation ("Sika") product identified and described herein. This information is not intended to address, nor does it address the use or application of the identified Sika product in combination with any other material, product or process. All of the information set forth herein is based on technical data regarding the identified product that Sika believes to be reliable as of the date hereof. Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's current Technical Data Sheet, product label and Material Safety Data Sheet for each Sika product, which are available at web site and/or telephone number listed in Section 1 of this MSDS.

SIKA MAKES NO WARRANTIES EXPRESS OR IMPLIED AND ASSUMES NO LIABILITY ARISING FROM THIS INFORMATION OR ITS USE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES AND SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

All sales of Sika products are subject to its current terms and conditions of sale available at www.sikacorp.com or 201-933-8800.

SIKA CORPORATION

Printed Using MSDS Generator™ 2000



MATERIAL SAFETY DATA SHEET

Sikaflex® 2C, NS & SL - Part B

HMIS

| | |
|---------------------|----|
| HEALTH | *2 |
| FLAMMABILITY | 2 |
| REACTIVITY | 0 |
| PERSONAL PROTECTION | C |

1. Product And Company Identification

Supplier

Sika Corporation
201 Polito Ave
Lyndhurst, NJ 07071

Company Contact: EHS Department
Telephone Number: 201-933-8800
FAX Number: 201-933-9379
Web Site: www.sikausa.com

Manufacturer

Sika Corporation
201 Polito Ave
Lyndhurst, NJ 07071

Company Contact: EHS Department
Telephone Number: 201-933-8800
FAX Number: 201-933-9379
Web Site: www.sikausa.com

Supplier Emergency Contacts & Phone Number

CHEMTREC: 800-424-9300
INTERNATIONAL: 703-527-3887

Manufacturer Emergency Contacts & Phone Number

CHEMTREC: 800-424-9300
INTERNATIONAL: 703-527-3887

Issue Date: 05/02/2007

Product Name: Sikaflex® 2C, NS & SL - Part B
CAS Number: Not Established
Chemical Family: Polyurethane
MSDS Number: 4095
Product Code: 0464140

2. Composition/Information On Ingredients

| Ingredient Name | CAS Number | Percent Of Total Weight |
|---------------------------|------------|-------------------------|
| POLYISOCYANATE PREPOLYMER | mixture | |
| XYLENE (MIXED ISOMERS) | 1330-20-7 | 5 - 10 |

3. Hazards Identification

Eye Hazards

Causes eye irritation.

Skin Hazards

May cause skin irritation. Prolonged and/or repeated skin contact may cause an allergic reaction/sensitization.

Ingestion Hazards

May be harmful if swallowed.

Inhalation Hazards

May cause nose, throat, and lung irritation. May cause respiratory tract irritation. May cause an allergic respiratory reaction / sensitization after prolonged or repeated contact. Reports have associated repeated and prolonged

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C, NS & SL - Part B

3. Hazards Identification - Continued

Inhalation Hazards - Continued

exposure to some of the chemicals in this product with permanent brain, liver, kidney, and Central Nervous System damage. Headaches and dizziness may result.

4. First Aid Measures

Eye

In case of contact, hold eyelids apart and immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention immediately.

Skin

In case of contact, immediately flush skin with soap and plenty of water. Get medical attention immediately if irritation (redness, rash, blistering) develops and persists.

Ingestion

If victim is fully conscious, give one or two cups of water or milk to drink. Never give anything by mouth to an unconscious victim. Call a physician or a poison control center immediately.

Inhalation

Remove to fresh air. If not breathing, give artificial respiration, seek medical attention.

5. Fire Fighting Measures

Flash Point: 112 °F

Autoignition Point: N/AV °F

Lower Explosive Limit: N/AV

Upper Explosive Limit: N/AV

Fire And Explosion Hazards

Combustible liquid. During a fire, irritating and/or toxic gases and aerosols from the decomposition/combustion products may be present.

Extinguishing Media

In case of fire, use water spray (fog) foam, dry chemical, or CO₂.

Fire Fighting Instructions

In the event of a fire, firefighters should wear full protective clothing and NIOSH-approved self-contained breathing apparatus with a full facepiece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

Eliminate all ignition sources. Use appropriate Personal Protective Equipment (PPE). Absorb and/or contain spill with inert materials (e.g. sand, vermiculite) and then place in appropriate container. For large spills, use water spray to disperse vapors. Prevent runoff from entering waterways or sewers.

7. Handling And Storage

Handling And Storage Precautions

Keep out of reach of children. Not for internal consumption.

Handling Precautions

Keep away from heat, sparks, flame, and other sources of ignition (i.e., pilot lights, electric motors, and static electricity).

Storage Precautions

Store at 32F min. - 122F max. Ideal storage temperature 50-80F. If closed container is exposed to heat, pressure can build up. If moisture enters container, pressure may build up due to reaction. Store in cool, dry area in tightly closed containers, away from sparks and open flames.

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C, NS & SL - Part B

7. Handling And Storage - Continued

Work/Hygienic Practices

Wash thoroughly with soap and water after handling.

8. Exposure Controls/Personal Protection

Engineering Controls

Use of a system of local and/or general exhaust is recommended to keep employee below applicable exposure limits. Refer to the current edition of "Industrial Ventilation: A Manual of Recommended Practice" published by the American Conference of Governmental Industrial Hygienists for information on the design, installation, use, and maintenance of exhaust systems.

Eye/Face Protection

Faceshield over safety glasses or goggles.

Skin Protection

Chemical-resistant gloves. Lab coat or other work clothing to prevent skin exposure. Launder before reuse.

Respiratory Protection

A respirator protection program that meets 29 CFR 1910.134 requirement must be followed whenever workplace conditions warrant a respirator's use. In areas where the Permissible Exposure Limits are exceeded, use a properly fitted NIOSH-approved respirator.

Other/General Protection

Wash thoroughly after handling.

Ingredient(s) - Exposure Limits

XYLENE (MIXED ISOMERS)
ACGIH TLV-STEL 150 ppm
ACGIH TLV-TWA 100 ppm
OSHA PEL-TWA 100 ppm

9. Physical And Chemical Properties

Appearance

Clear liquid

Odor

Aromatic Odor

Chemical Type: Mixture

Physical State: Liquid

Specific Gravity: 1.02

Percent Volatiles: 9.0

Packing Density: 8.5 pounds/gallon

Vapor Density: > AIR

Evaporation Rate: Slower than ether

VOC content: Part B: 92 g/l

For VOC Content of the A & B component mixed, please see the appropriate Part A MSDS.

10. Stability And Reactivity

Stability: Stable

Hazardous Polymerization: Will not occur

Conditions To Avoid (Stability)

Open flame, heat

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C, NS & SL - Part B

10. Stability And Reactivity - Continued

Incompatible Materials

Water, Alcohols and Amines

Hazardous Decomposition Products

CO, CO₂, Oxides of Nitrogen

11. Toxicological Information

No Data Available...

12. Ecological Information

No Data Available...

13. Disposal Considerations

Dispose in accordance with applicable federal, state and local government regulations. Waste generators must determine whether a discarded material is classified as a hazardous waste. USEPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

14. Transport Information

Proper Shipping Name

Ground Transport - Not Regulated by the USDOT (per 49 CFR 173.150(f))
Air, Vessel Transport - Flammable Liquids, N.O.S, (Xylene), 3, UN1993, PG III

Additional Shipping Paper Description

Note: This product is not packaged for air transport.

15. Regulatory Information

U.S. Regulatory Information

All ingredients of this product are listed or are excluded from listing under the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory.

SARA Hazard Classes

Acute Health Hazard
Chronic Health Hazard
Fire Hazard

SARA Title III - Section 313 Supplier Notification

This product contains the following toxic chemicals that are subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372.

XYLENE (MIXED ISOMERS) (1330-20-7) 5 - 10 %

This information must be included on all MSDSs that are copied and distributed for this material.

Ingredient(s) - U.S. Regulatory Information

XYLENE (MIXED ISOMERS)
SARA Title III - Section 313 Form "R"/TRI Reportable Chemical
SARA - Acute Health Hazard
SARA - Chronic Health Hazard
SARA - Fire Hazard

Ingredient(s) - State Regulations

XYLENE (MIXED ISOMERS)
New Jersey - Workplace Hazard

MATERIAL SAFETY DATA SHEET

Sikaflex® 2C, NS & SL - Part B

15. Regulatory Information - Continued

Ingredient(s) - State Regulations - Continued

New Jersey - Environmental Hazard
New Jersey - Special Hazard
Pennsylvania - Workplace Hazard
Pennsylvania - Environmental Hazard
Massachusetts - Hazardous Substance
New York City - Hazardous Substance

16. Other Information

HMIS Rating

Health: *2

Fire: 2

Reactivity: 0

PPE: C

Revision/Preparer Information

MSDS Preparer: EHS Department

This MSDS Supercedes A Previous MSDS Dated: 08/11/2006

Disclaimer

The information contained in this Material Safety Data Sheet applies only to the actual Sika Corporation ("Sika") product identified and described herein. This information is not intended to address, nor does it address the use or application of the identified Sika product in combination with any other material, product or process. All of the information set forth herein is based on technical data regarding the identified product that Sika believes to be reliable as of the date hereof. Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's current Technical Data Sheet, product label and Material Safety Data Sheet for each Sika product, which are available at web site and/or telephone number listed in Section 1 of this MSDS.

SIKA MAKES NO WARRANTIES EXPRESS OR IMPLIED AND ASSUMES NO LIABILITY ARISING FROM THIS INFORMATION OR ITS USE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES AND SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

All sales of Sika products are subject to its current terms and conditions of sale available at www.sikacorp.com or 201-933-8800.

SIKA CORPORATION

Color Works

Sikaflex-2c Color Chart

Sika Sealants.....
For Packaging Needs That Meet And Exceed Your Specs.

Sikaflex-2C

Sikaflex-2c NS is a 2-component, premium-grade, polyurethane-based, elastomeric sealant. It is principally a chemical cure in a non-sag consistency. Meets ASTM C-920, Type M, Grade NS, Class 25, use T, NT, M, G, A, O, I and Federal Specification TT-S-00227E, Type II, Class A. Tested in accordance with ASTM C-1382 for use in EIFS Systems.

Pails - 1.5gal units
3 gal units

Sikaflex-2c SL is a 2-component, premium-grade, polyurethane-based, elastomeric sealant. It is principally a chemical cure in a self-leveling consistency. Meets ASTM C-920, Type M, Grade P, Class 25, use T, NT, M, G, A, O, I and Federal Specification TT-S-00227E, Type I, Class A.

Additional colors are also available with Sika's Color Matching Process coordinated through the customer service department.

Pails - 1.5gal units
3 gal units

- Minimum order are colorpak on any custom color
- 3-day turn around time on custom matches
- 3-day production of custom colors

Distributed By:

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Technical Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.

Contact Sika At:
Phone: 1-800-933-SIKA NATIONWIDE
Internet: www.sikaconstruction.com



Sika Corporation (USA)
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Corregidora, Queretaro
C.P. 76920 A.P. 136
Phone: 52 42 25 0122
Fax: 52 42 25 0537

Sika Canada, Inc.
601 Delmar Avenue
Point Claire,
Quebec H9R4A9
Phone: 514-697-2610
Fax: 514-694-2792

SIKA...INNOVATIVE SOLUTIONS FOR A CONCRETE WORLD

SIKA...INNOVATIVE SOLUTIONS FOR A CONCRETE WORLD®

Sikaflex-2c Polyurethane Sealants

Standard Colors




White



Sierra Beige



Sandalwood

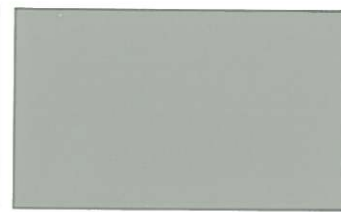


Limestone




Capitol Tan



Rustic Red

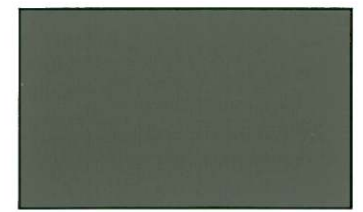

Desert Taupe

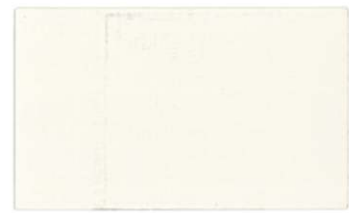


Colonial White



Sandalwood Beige



Pearl Ash

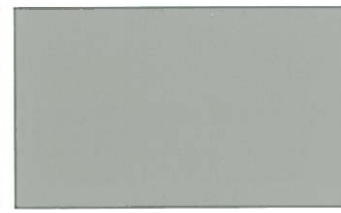


Aluminum Gray



Medium Brown



Brick

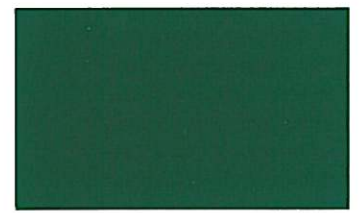

Evergreen



Brite White



Buff



Parchment



Minnesota Gray




Adobe Accent



Redwood



Bronze

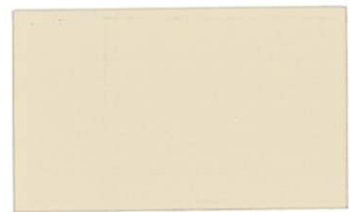

Eggshell Cream



Geographic Beige



Dover Sky



Gray



Blush Beige



Baptist Red



Dark Bronze



Amarillo White



Van Dyke



Precast



Tan



Sahara



Green Gray



Black

The final cured color of the actual product may vary. Use actual Sikaflex-2c and color pak for actual color matching.